GOTTLIEB®

MR. OPERATOR

CLEAN & WELL LIGHTED MACHINES EARN MORE MONEY!

CLEAN PLAYFIELD AT LEAST ONCE EACH WEEK & REPLACE BURNED OUT LITE BULBS PROMPTLY!

GOTTLIEB®

GOTTLIEB®

1927 Thirty-Seven Years of Leadership 1964

Since 1927, D. GOTTLIEB & COMPANY has manufactured the finest coin operated amusement machines. We are proud of our products and the fine group of distributors that represent us throughout the world. We have always emphasized quality and shall endeavor to produce a good piece of equipment at the right price so that the operator of GOTTLIEB machines will always get a proper return on his investment. Our long established policy of "GAUGED PRODUCTION" will in the future, as it has in the past, assure all purchasers of GOTTLIEB machines, a high and stable trade-in value.

The purpose of this catalog is to enable the operators of our products to order parts quickly and accurately from GOTTLIEB DISTRIBUTORS, who will in turn assure the prompt filling of orders so that valuable machines will not be idle. Also included in this catalog are some adjustment and lubrication instructions from our engineering department that will help in getting the maximum service out of our machines.

USE ONLY GENUINE GOTTLIEB PARTS FOR SERVICING GOTTLIEB MACHINES!
AVAILABLE FROM ALL GOTTLIEB DISTRIBUTORS.

GOTTLIEB®

D. GOTTLIEB & COMPANY

1140 NORTH KOSTNER AVENUE
CHICAGO, ILLINOIS 60651
U.S.A.

"There is no Substitute for Quality"

WHEN ORDERING PARTS

1. Refer to the catalog and order all parts by number and description, specifying quantity and name of game for which parts are being ordered.

2. Figure prices as quoted in the catalog. All prices are subject to change without notice.

3. Returned merchandise will not be accepted unless previously authorized.

4. All prices net F.O.B. your GOTTLIEB distributors office.

REMEMBER! SERVICE GOTTLIEB MACHINES ONLY WITH GENUINE GOTTLIEB PARTS BECAUSE "THERE IS NO SUBSTITUTE FOR QUALITY."

GOTTLIEB®

TABLE OF CONTENTS

	Page
"Pop" Bumper Assembly	1
Small Step Switch – Replay Unit	2
Small Step Switch – 2 Step Replay Unit	3
Small Step Switch – No Reset, with Bell, Lightbox Mounting	4
Large Step Switch – with Reset Lock-in, Lightbox Mounting	5
Roto Unit	6
Card Target for Roto Unit	7
Ten Step Unit	8
Ten Step Unit Parts	9
Ten Step Unit Parts	10
Small Step Switch – Animation	11
Drive Levers	12
Drive Levers	13
Drive Levers	14
Drive Levers	15
Drive Lever & Unit Parts	16
Plungers & Unit Mountings	17
Small Step Switch Wipers	18
Small Step Switch Wipers	19
"R" Relays	20
"R" Relays Armature Chart	21
"AG" Relays and Parts	22
Magnet Relay & Misc. Silver Contact Points	23
Relay Bank	24
Contact Kicker & Misc. Tools	25
Flipper Assemblies	26
Flipper Parts	27
Ball Hole Kicker Assemblies	28
Ball Shooter Plunger & Ball Lift Push Rod Assemblies	29
Ball Elevator Assemblies	30
Hole Flaps, "Pop" Bumper Parts & Plastic Targets	31
Coil Sleeve, Mini-Post, Ball Gate, Kick Switch Rod and Coil Stop	32
Switches and Targets	33
Switch Parts	34
Switch Parts	35
Formed Switch Blades and Rollover Wire Forms	36
Rollover Wire Forms	37
Slug Rejector Chute Parts	38
Slug Rejector Chute Parts & Coin Entrance Plates	39
Coin Entrance Plates	40
Metal Front Door Parts & Arch Hole Liner	41
Misc. Cabinet Parts	42
Misc. Cabinet Parts	43
Tilt Assemblies	44
Model "SL" Front Moulding Parts	45
Front Door Parts	46
Front Door Parts	47
Front Door Lock Parts	48
Playboard Auto Clamp	49
Model "SS3" Front Moulding Parts & Motor Cam	50
3" Bell Assembly & Knocker Assembly	51
Metal Score Card Holders	52
Metal Score Card Holders	53
Wiring Diagram Symbols	54
Game Lubrication and Coil Chart	55
Parts List – Games Listed in Order Produced	56 to 61
Price List – Arranged by Groups of Related Parts	62 to 68
Price List – Arranged in Numberical Order Index	69 to 81

ALPHABETICAL INDEX

Description	Page
A	
"Ace" Type Lock Cam	48
Adjusting Nut – "SS3" Moulding	50
Adjusting Screw – "SS3" Moulding	50
Adjustment of "AG" Relay	22
Adjustment, Large Step Switch	5
Adjustment, Pop Bumper	1
Adjustment, Replay Unit	2
Adjustment, Replay Unit, Two Step	3
Adjustment, Roto Unit	6
Adjustment, Small Step Switch	4
Adjustment, Ten Step Unit	8
Arch Hole Liner	41
Arch Stick Protector	43
Armature Assembly – "AG" Type Relay	22
Armature Assemblies, "R" Type Relay	21
Assemblies (Price Listing)	62
Auto Clamp – Playboard	49
B	
Backing Blades	35
Ball Elevator Assembly	30
Ball Gate	32
Ball Hole Kicker	28
Ball Lift Assembly	30
Ball Lift Push Rod Assembly	29
Ball Roll Tilt	44
Ball Shooter Plunger Assembly	29
Banana Cut Liner	43
Bank Parts	24
Bank Setup Assembly	24
Bank Setup Assembly (Price Listing)	62
Bank, Relay (Price Listing)	67
Bayonet Socket – Bumper	1
Bell Arm, Step Switch	16
Bell, 3" Bell Assembly	51
Blades, Switch	34, 35, 36
Bob, Tilt	44
Bolt Guide, Lock	48
Bolt, Lock	48
Bracket, Small Step Switch Mounting	17
Bumper Assembly, "Pop"	1
Bumber Contact Switch Assembly	33
Bumper Parts	17, 31
Bumper Parts (Price Listing)	62
Bumper Switch Blades	34
Button, Metal Door	41
Button, Flipper	43
Button, Rollover Button Switch Blade	34
C	
Cabinet Doors	41, 46
Cabinet Door Parts	41, 42, 46, 47, 48
Cabinet Doors (Price Listing)	63
Cabinet, Five Ball (Price Listing)	62
Cabinet Hardware	41, 42, 43, 44, 45, 46, 47, 48, 49, 50

Description	Page
Cabinet, Multiple Player Deluxe (Price Listing)	63
Cabinet, Hardware (Price Listing)	63
Cam – Lock	48
Cam – Motor	50
Cams, Flippers	27
Cam & Ratchet Hub – 10 Step Unit	9
Card Holders, Score	52, 53
Card Targets	7
Cash Boxes	56, 57, 58, 59, 60, 61
Chutes, Drop Type (Price Listing)	
Chute Parts	38, 39, 40, 42, 46, 47
Chutes, Slug Rejector Type (Price Listing)	67
Cigarette Holder	43
Clip, Retaining	43
Coil Chart	55
Coil Sleeve	32, 55
Coil Stop	32
Coils (Price Listing)	64
Coin Entrance Plates	39, 40
Coin Feed Trough	39
Coin Return Baffle Plate	47
Coin Return Cover	46
Coin Return Guide Trough	47
Coin Return Housing	46
Coin Return Trough	42, 47
Coin Return Turnaround	42
Contact Adjuster Tool	25
Contact Kicker	25, 56, 57, 58, 59, 60, 61
Contact Points, Silver	23
Contact Switch Assembly	33
Corner Trim	45
Cover Plate, Switch	35
D	
Damper for Coin Chute Switch	38
Disc for Units	56, 57, 58, 59, 60, 61
Doors	41, 46
Doors, Cabinet (Price Listing)	63
Door Stop	42
Door Trim Ring	41
Drive Levers	12, 13, 14, 15, 16
"Duo" Type Lock Cam	48
E	
Elevator Assembly	30
Entrance Plate, Coin	39, 40
F	
Feeler Gage	25
Fibre Insulators	34
Fibre Lifters	34
Flap, Hole	31
Flipper Assembly	26, 27
Flipper Button Guard	27
Flipper Button and Retaining Clip	43
Flipper Links	56, 57, 58, 59, 60, 61

GOTTLIEB®

ALPHABETICAL INDEX

Description	Page
Flipper Parts	26, 27, 33, 43
Flipper Parts (Price Listing)	
Flipper Switches	33
Formed Switch Blades	36
Formed Switch Blades (Price Listing)	68
Front Door	41, 46
Front Moulding Latch Lever	42
Front Moulding Lock "SL"	45
Fuses (Price Listing)	64
G	
Gage, Feeler	25
Gate, Ball	32
Gears and Shafts, Step Switches	56, 57, 58, 59, 60, 61
Ground Wire – 10 Step Unit	9
Guard, Flipper Button	27
Guide, Lock Bolt	48
H	
Hairpin Fastener	17
Hardware, Cabinet (Price Listing)	63
Hardware, Misc., (Price Listing)	68
Hex Head "T" Wrench	25
Hinge, Front Door	47
Hinge – Light Box Insert	43
Hinge Nut Strip	47
Hole Flaps	31
Hole Kicker, Ball	28
Hole Liner, Arch	41
Hole Plug, Front Door	47
Hub – 10 Step Unit	9
I	
Insert Hinge, Lightbox	43
Instructions – "AG" Relay	22
– Animation Unit	11
– Large Step Switch	5
– Pop Bumper	1
– Replay Unit	2
– Roto Unit	6
– Small Step Switch	4
– Ten Step Unit	8
– Two Step Replay Unit	3
Insulating Yoke	31
Insulators	34, 35
K	
Kick Switch Rod	32
Kicker, Ball Hole	28
Kicker Contact	25, 56, 57, 58, 59, 60, 61
Kicker Plunger	17
Knocker	51
L	
Lamps (Price Listing)	64
Lamp Sockets (Price Listing)	64
Large Step Switch	5
Latch Lever – Front Moulding	42

Description	Page
Lever Arms, Flipper	27, 56, 57, 58, 59, 60, 61
Levers, Drive	12, 13, 14, 15, 16
Lift, Ball Lift Assembly	30
Lift, Ball Lift Push Rod Assembly	29
Lifters, Switch	34
Lightbox Insert Hinge	43
Liner, Banana Cut	43
Link, Reset	16
Links, Flipper	56, 57, 58, 59, 60, 61
Lock Adjustment Nut, Moulding	45, 50
Lock Bolt	48
Lock Bolt Guide	48
Lock Cam	48
Lock Nut	45
Lock Plate, Moulding	45
Lock Strike Bracket – Auto Clamp	49
Lock Strike Plate	48
Lockdown Moulding "SS3"	50
Lockin Pawl, Reset	16
Lubrication, Game	55
M	
Metal Front Door	41, 46
Metal Score Card Holder	52, 53
Magnet Type Relays (Price Listing)	66
Magnet Type Relays	23
Mercury Tilt Switch	44
Mini Post	32
Motor Cam	50
Motors (Price Listing)	68
Moulding Latch Lever	42
Moulding Lock Adjustment Nut	45, 50
Moulding Lock Plate	45
Moulding Lock "SL"	45
Moulding, "SS3" Lockdown	50
N	
Nut, Lock	45, 50
P	
Parts List – By Games	56, 57, 58, 59, 60, 61
Pawl, Reset Lockin	16
Pawl, Subtract	16
Plastics (Price Listing)	65
Plastic Targets	31
Playboard Auto Clamp	49
Playboard Lock Strike Bracket	49
Playboard Support	49
Plug, Front Door Hole	47
Plungers	17
Plunger, Ball Shooter Plunger Assembly	29
Points Silver Contact	23
"Pop" Bumper Assembly	1
"Pop" Bumper Parts	17, 31
Post, Mini	32
Price List (By Related Parts)	62
Price List (By Numerical Order)	69

GOTTLIEB®

ALPHABETICAL INDEX


Description	Page
Protector, Arch Stick	43
Push Button – Metal Door	41
Push Rod, Ball Lift	29
R	
Rejector, Coin Chute Parts	38, 39, 40, 42, 46, 47
Relay "AG" Type	22
Relay Bank (Price Listing)	67
Relay Bank Parts	24
Relay Magnet Type (Price Listing)	66
Relay Magnet Type	23
Relay "R" Type (Price Listing)	66
Relay "R" Type	20
Relay "R" Type Armature Chart	21
Replay Unit	2
Replay Unit, Two Step	3
Reset Link	16
Reset Lock-In Pawl	16
Retaining Clip	43
Retaining Rings (Price Listing)	67
Return Springs, Flipper	27
Ring, Trim for Metal Door	41
Ring, Trim Mounting Strip	42
Rollover Button Switch Blade	34
Rollover Wire Forms	36, 37
Roto Unit	6
Roto Unit Adjustment Instructions	6
Rubber Contact Switch Assembly	33
Rubber Rings (Price Listing)	67
S	
Score Card Holders	52, 53
Separators	35
Setup, Bank Setup Assembly	24
Shelf, 10 Step Unit	10
Shooter, Ball Shooter Plunger Assembly	29
Side Lugs	35
Silver Contact Points	23
Sleeve, Coil	32, 55
Slotted Yoke	31
Slug Rejector Chutes (Price Listing)	67
Slug Rejector Chutes Parts	38, 39, 40, 42, 46, 47
Socket, Bumper	1
Socket, Lamp (Price Listing)	64
Spider Washer	9
Springs, Flipper Return	27
Subtract Pawl	16
Step Switch, Animation	11
Step Switch, Disc	56, 57, 58, 59, 60, 61
Step Switch, Gears and Shafts	56, 57, 58, 59, 60, 61
Step Switch, Large	5
Step Switch, No Reset, with Bell, Light Box Mounting	4
Step Switch, Parts	9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19
Step Switch, Replay Unit	2
Step Switch, Replay Unit, Two Step	3
Step Switch, Roto Unit	6

Description	Page
Step Switch, Small	2, 3, 4, 10
Step Switch, Ten Step	8, 9, 10
Step Switch Unit Mounting Brackets	17
Step Switch Wipers (Price Listing)	67
Step Switch Wiper	9, 18, 19, 56, 57, 58, 59, 60, 61
Step Switch Wiper Cover Plate	19
Step Switch Wiper Mounting Spider	19
Stop, Coil	32
Strike Bracket, Auto Clamp Lock	49
Strike Plate, Lock	48
Support, Playboard	49
Switch Assemblies (Price Listing)	67
Switch Assemblies	10, 22, 33, 38
Switch Blades, Formed (Price Listing)	68
Switch Link, Flipper	27
Switch Parts	34, 35, 36
Switch Rod, Kick	32
Symbols, Wiring Diagram	54
T	
Target, Assemblies	33
Target, Card	7
Target, Plastic	31
Target Switch Blades	34
Ten Step Unit	8
Ten Step Unit Parts	9, 10
Tilt, Ball Roll	44
Tilt, Bob Wire Assembly	44
Tilt, Mercury Switch	44
Tools	25
Turnaround, Coin Return	42
Transformers (Price Listing)	68
Trim Ring for Metal Front Door	41
Trim Ring Mounting Strip	42
Trough, Coin Chute	39
Trough, Coin Guide	47
"T" Wrench, Hex Head	25
U	
Unit Mounting Shelf, 10 Step	10
Unit Mounting Brackets, Small Step Switch	17
V	
Vibration Damper – Coin Chute	38
Vibration Damper and Switch	38
W	
Washer, Spider	9
Wiper Cover Plate	19
Wiper Mounting Spider	19
Wipers, Step Switch (Price Listing)	67
Wiper, Step Switch	9, 18, 19, 56, 57, 58, 59, 60, 61
Wire (Price Listing)	68
Wire Forms, Rollover	36, 37
Wiring Diagrams Symbols	54

COIN-TILE®

GOTTLIEB®

"POP" BUMPER ASSEMBLY

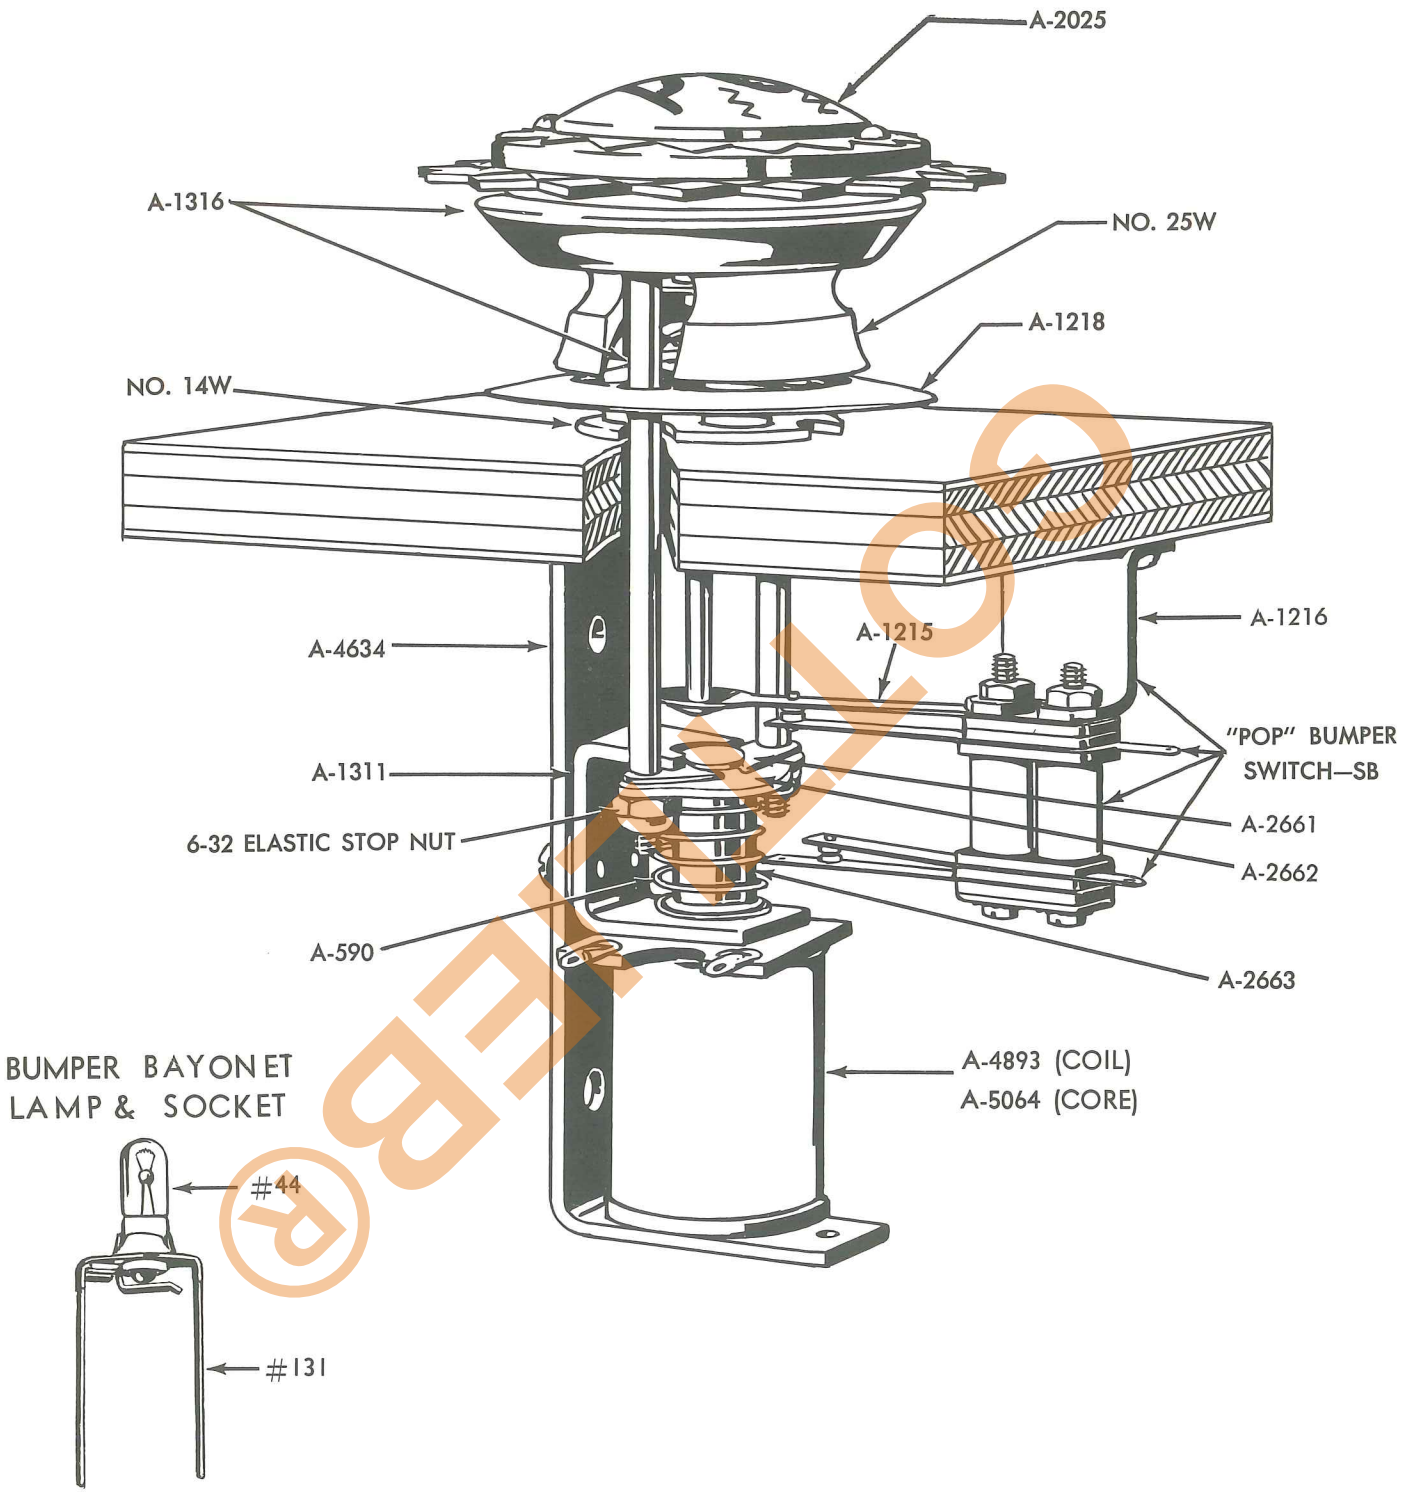

Use slots in A-1216 mounting bracket to center bumper switch. Adjust A-1215 blade to rest lightly on bumper stem.


A 1/64" opening on this switch is normal.

With the plunger in, the lock-in switch should show a 1/32" opening.

.WHEN ORDERING PARTS, SPECIFY PART NO. AND NAME OF GAME.

SMALL STEP SWITCH

REPLAY UNIT

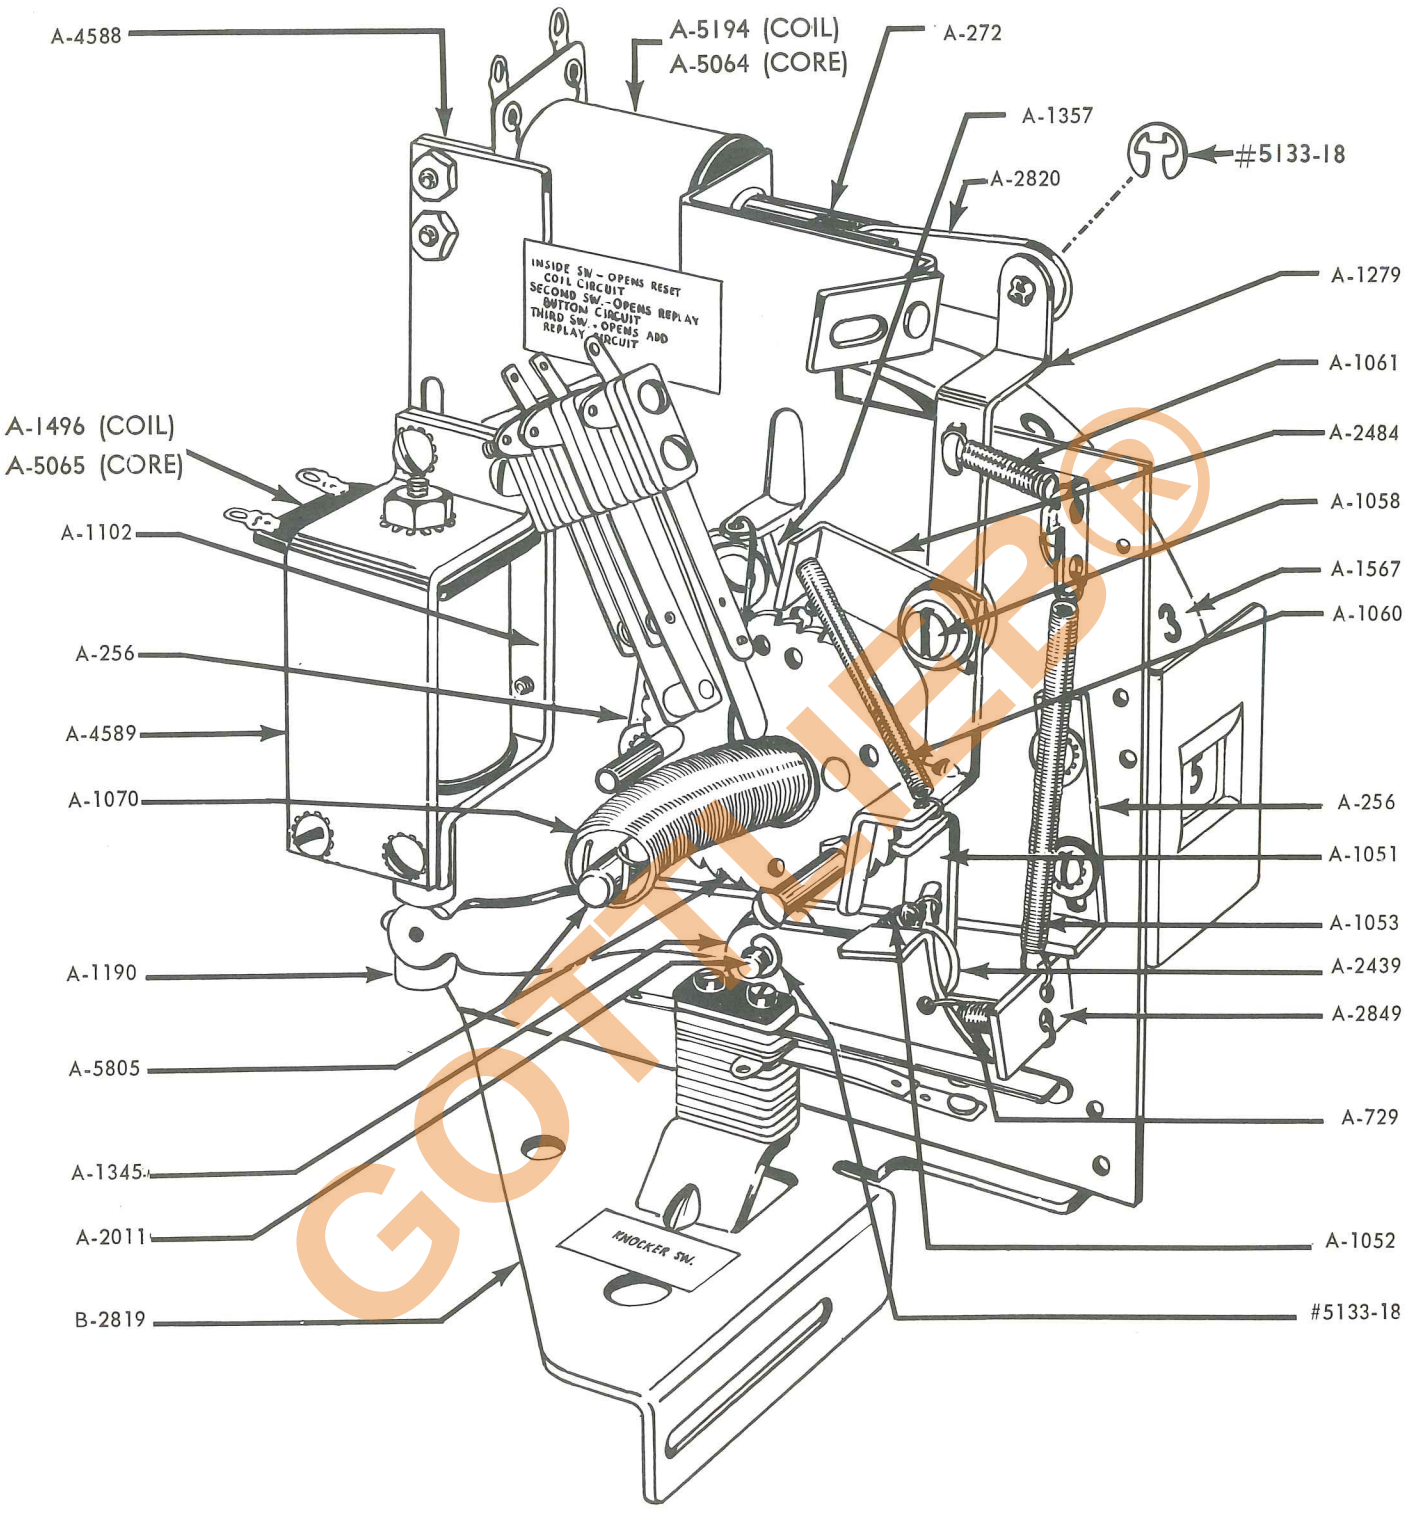

Adjust zero stop A-1357 so that reset lever A-1279 rests in base of tooth.

Adjust stop A-256 near drive spring, so that step-up pawl A-1051 will move gear just to point where reset lever A-1279 comes to rest at base of tooth as unit is stepped.


Hold *plunger* A-1190 against coil stop and adjust coil case up or down so that step-up pawl A-1051 has moved approximately 1½ teeth.

Still holding *plunger* A-1190 in, adjust stop A-256 (stop near step-up coil) against step-up arm A-2849.

WHEN ORDERING PARTS, SPECIFY PART NO. AND NAME OF GAME.

GOTTLIEB®

SMALL STEP SWITCH
2 STEP REPLAY UNIT

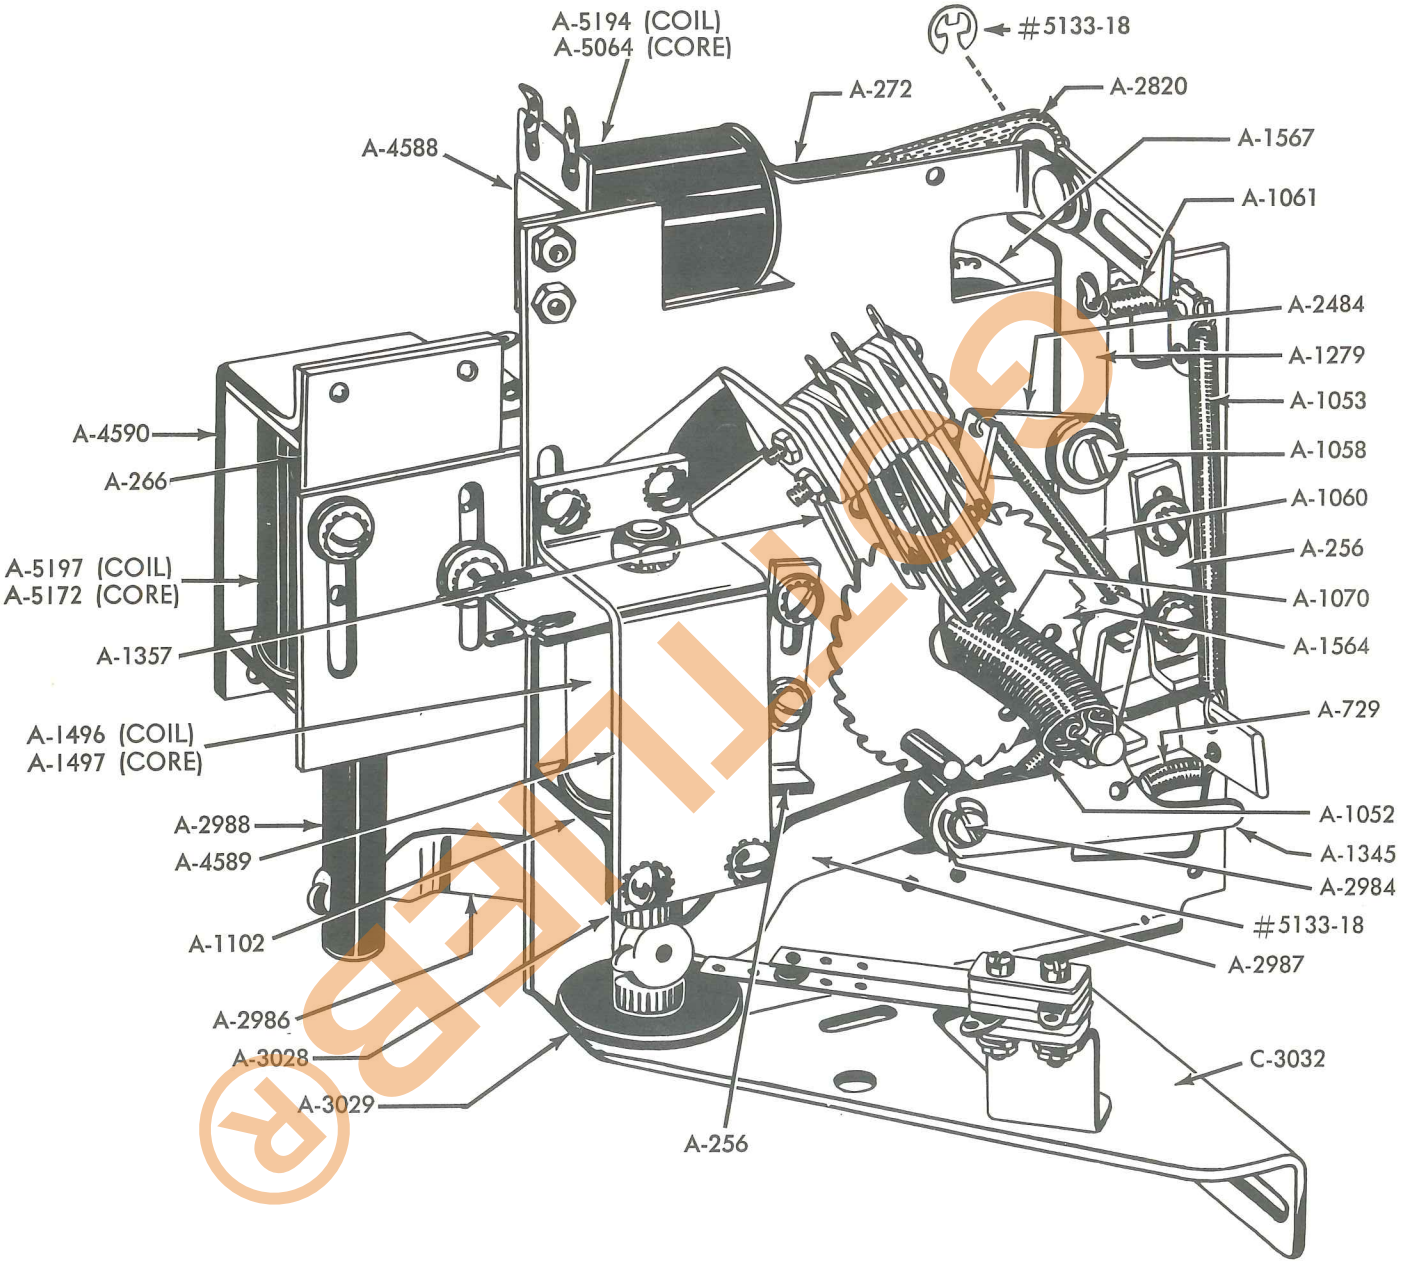

Adjust zero stop A-1357 so that reset lever A-1279 rests in base of tooth. Adjust stop A-256 near drive spring so that step-up pawl will move gear just to point where reset lever A-1279 comes to rest at base of tooth as unit is stepped.


Hold plunger A-3028 against one step coil stop and adjust coil case up or down so that step-up pawl has moved approximately 1½ teeth.

Still holding plunger A-3028 in, adjust stop A-256 (stop near one step coil) against step-up arm A-2987.

Hold plunger A-2988 against two step coil stop and adjust coil case up or down so that step-up pawl has moved approximately 2½ teeth.

WHEN ORDERING PARTS, SPECIFY PART NO. AND NAME OF GAME.

SMALL STEP SWITCH
NO RESET, WITH BELL, LIGHT-BOX MOUNTING

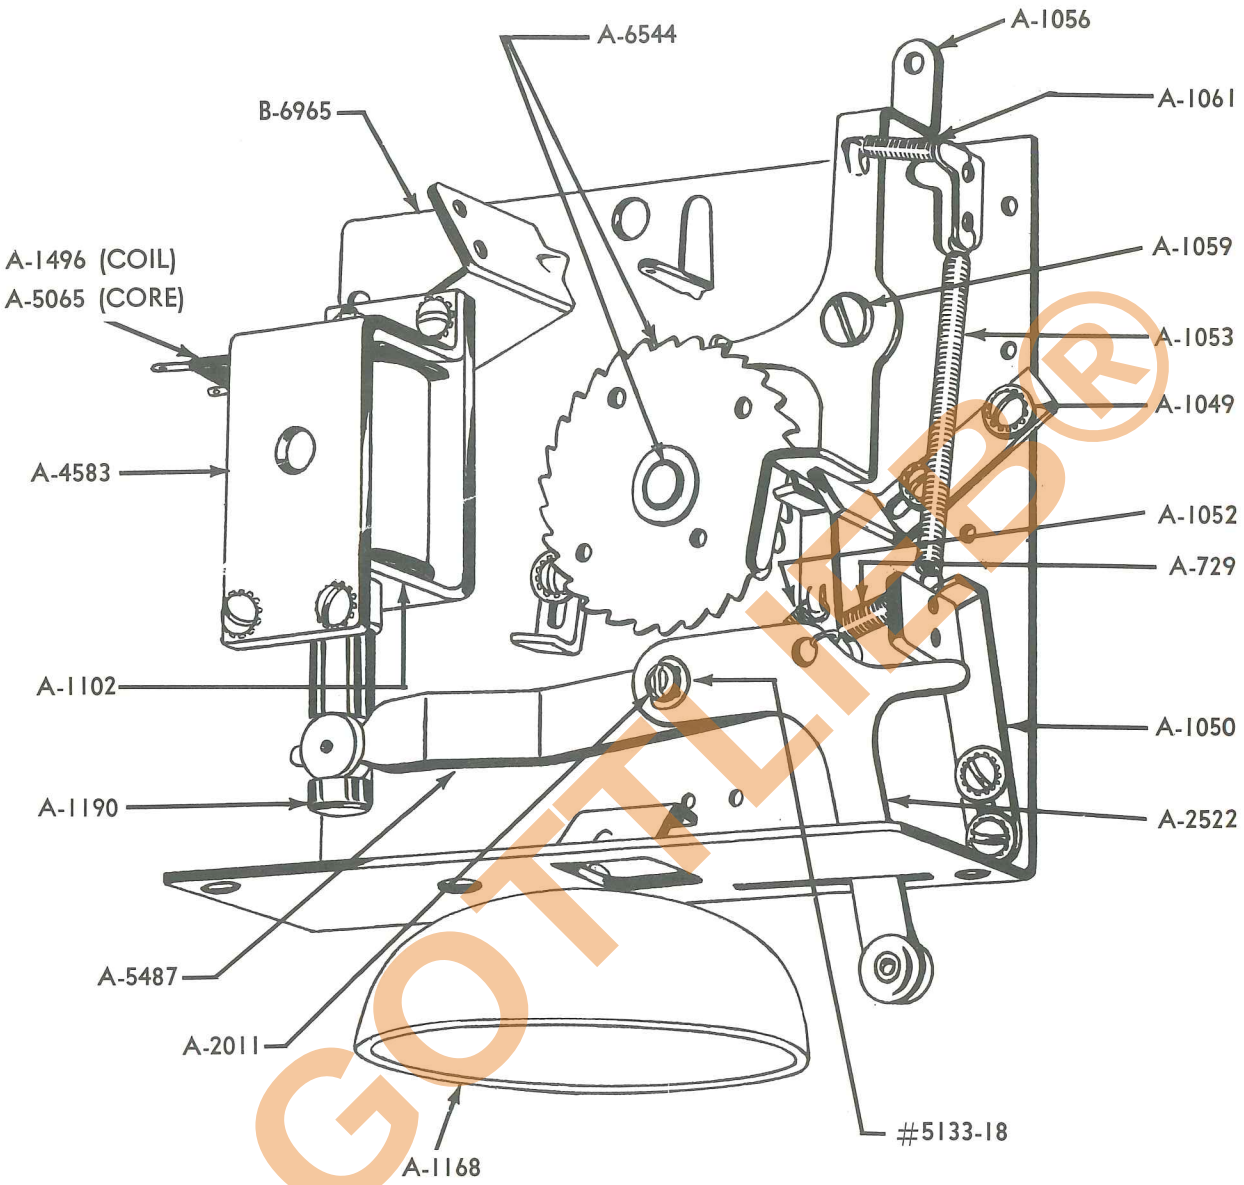

GOTTLIEB®

Adjust stop A-1050 so that step-up pawl will move gear just to point where reset lever A-1056 comes to rest at base of tooth as unit is stepped.


Adjust A-1049 jam stop to jam against step-up pawl.

Hold plunger A-1190 against coil stop and adjust coil case up or down so that step-up pawl has moved approximately 1½ teeth.

Still holding plunger A-1190 in, adjust stop A-256 against step-up arm A-2851 .

WHEN ORDERING PARTS, SPECIFY PART NO. AND NAME OF GAME.

LARGE STEP SWITCH
WITH RESET LOCK-IN, LIGHT-BOX MOUNTING

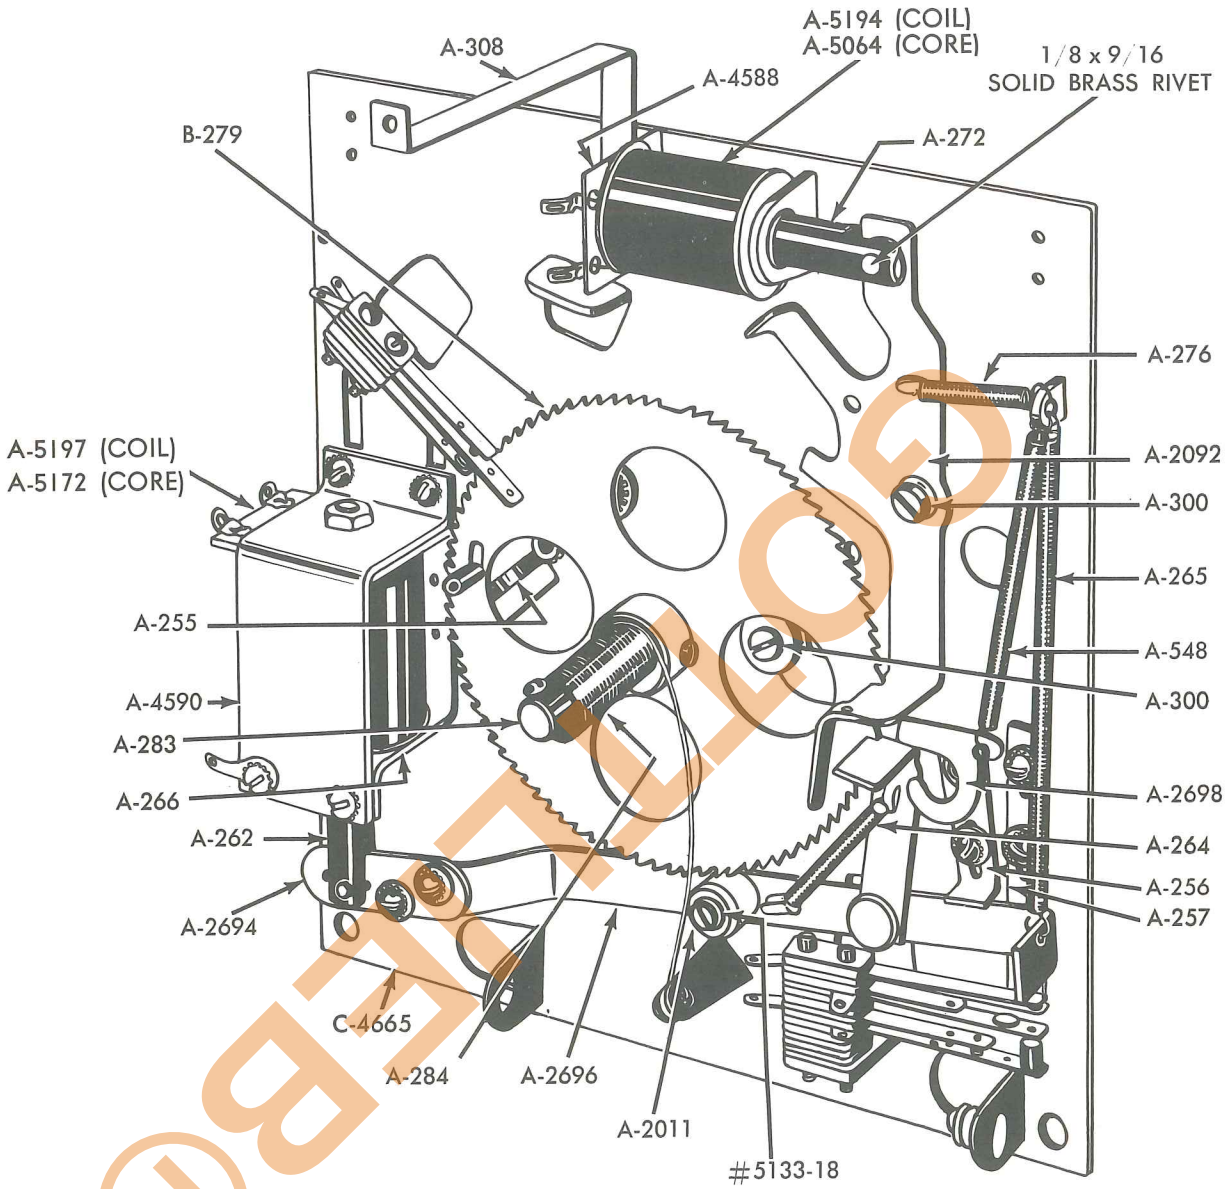

Adjust zero stop A-255 so that reset lever A-2092 rests at base of tooth.

Adjust stop A-256 so that step-up pawl will move gear just to point where reset lever A-2092 comes to rest at base of tooth as unit is stepped.

Hold plunger A-262 against coil stop and adjust coil case up or down so that step-up pawl has moved approximately 1½ teeth.


Still holding plunger A-262 in, adjust stop A-257 against step-up arm A-2696 .

WHEN ORDERING PARTS, SPECIFY PART NO. AND NAME OF GAME.


ROTO UNIT

CLOCKWISE ROTATION UNIT SHOWN. SEE TABLE FOR COUNTER CLOCKWISE UNIT PARTS


Clockwise Part No	Counter Clockwise Part No
A-4184	A-4184
A-4185	A-6122
A-4188	A-6121
A-6545	A-6574
A-4272	A-4272
B-6620	B-6621

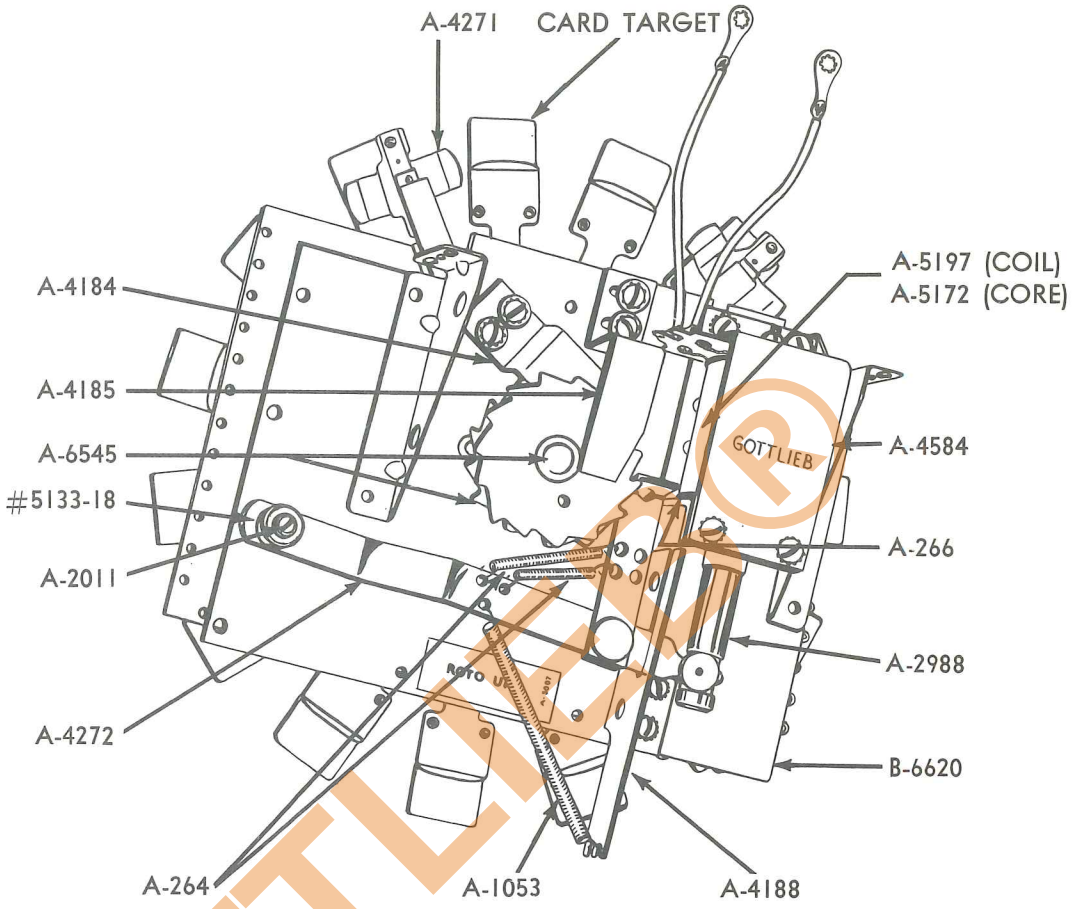

ROTO UNIT ADJUSTMENT INSTRUCTIONS

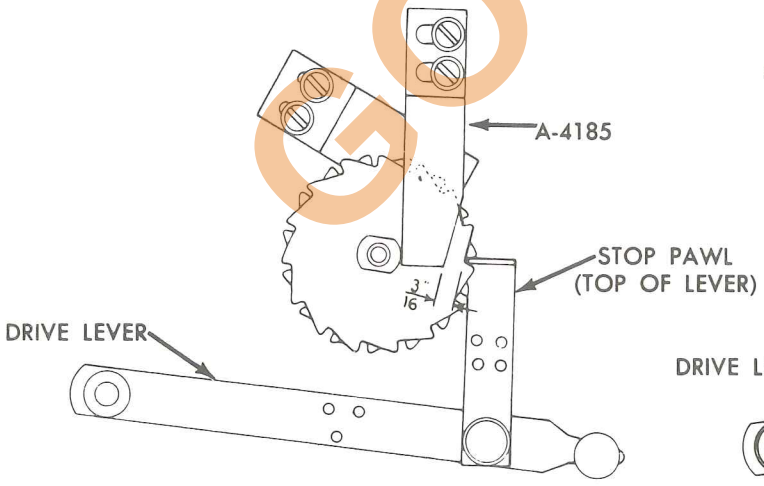

Adjust stop pawl lift A-4185 with drive lever in at rest position. The space between the stop pawl and A-4185 is 3/16". Note relation of teeth on ratchet to A-4185 for visual check.

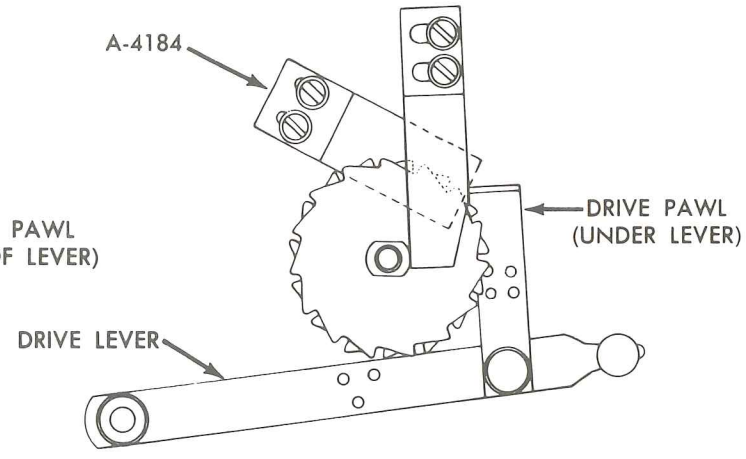

Adjust drive pawl lift A-4184 with drive lever in energized position. Drive Pawl should clear spinning ratchet by 1/32". Both pawls should be clear of ratchet at this position. Stroke of plunger in coil is 7/8".

GOTTLIEB®


CARD TARGET FOR ROTO UNIT

Part No.	Symbol	Symbol Color	Background Color	Border Color
A-4343	J	Black	White	Black
A-4708	2	Red	White	
A-4709	3	Black	White	
A-4733	2	Black	White	Black
A-4734	3	Black	White	Black
A-4735	4	Black	White	Black
A-4736	5	Black	White	Black
A-4737	6	Black	White	Black
A-4738	7	Black	White	Black
A-4739	8	Black	White	Black
A-4740	9	Black	White	Black
A-4741	10	Black	White	Black
A-4742	J	Black	White	Black
A-4743	K	Black	White	Black
A-4744	A	Black	White	Black
A-4745	Stripes	Red	White	
A-4746	Stripes	Green	White	
A-4835	20	Red	White	
A-4836	30	Red	White	
A-4837	40	Red	White	
A-4838	50	Red	White	
A-4839	Star	Red	White	
A-4871	100,000	Black	White	
A-4872	200,000	Black	White	
A-4873	500,000	Black	White	
A-4874	1 Million	Black	White	
A-4929	1/9	Black	Yellow	
A-4930	2	White	Blue	
A-4931	3	White	Red	
A-4932	4/12	White	Purple	
A-4933	5	Black	Orange	
A-4934	6	White	Green	
A-4935	7/15	White	Brown	
A-4936	8	Black	White	
A-4937	10	White	Blue	
A-4938	11	White	Red	
A-4939	13	Black	Orange	
A-4940	14	White	Green	
A-4968	9/1	Black	Yellow	
A-4969	12/4	White	Purple	

Part No.	Symbol	Symbol Color	Background Color	Border Color
A-4970	15/7	White	Brown	
A-5068	1	Red	White	
A-5069	3	Red	White	
A-5070	4	Red	White	
A-5071	5	Red	White	
A-5072	6	Red	White	
A-5073	7	Red	White	
A-5082	300,000	Black	White	
A-5279	10	Red	White	
A-5008	10	Black	White	
A-5509	20	Black	White	
A-5510	30	Black	White	
A-5511	40	Black	White	
A-5512	50	Black	White	
A-5574	1	Black	White	
A-5575	1	White	Red	
A-5576	2	Black	White	
A-5577	2	White	Red	
A-5578	3	White	Red	
A-5579	4	Black	White	
A-5580	4	White	Red	
A-5581	5	Black	White	
A-5582	5	White	Red	
A-5583	100	Blue	Yellow	
A-5748	10	Black	Red	
A-5749	20	Black	Red	
A-5750	30	Black	Red	
A-5751	10	Yellow	Green	
A-5752	20	Yellow	Green	
A-5753	30	Yellow	Green	
A-6324	6	Black	White	
A-6325	7	Black	White	
A-6327	9	Black	White	
A-6328	"Bulls Eye"	Red	White	
A-6803	11	Black	White	
A-6804	12	Black	White	
A-6805	13	Black	White	
A-6806	14	Black	White	
A-6807	Clown	Black	White	
A-6961	15	Black	White	
A-7304	"Bulls Eye"	Red & White	White	

GOTTLIEB®

TEN STEP UNIT

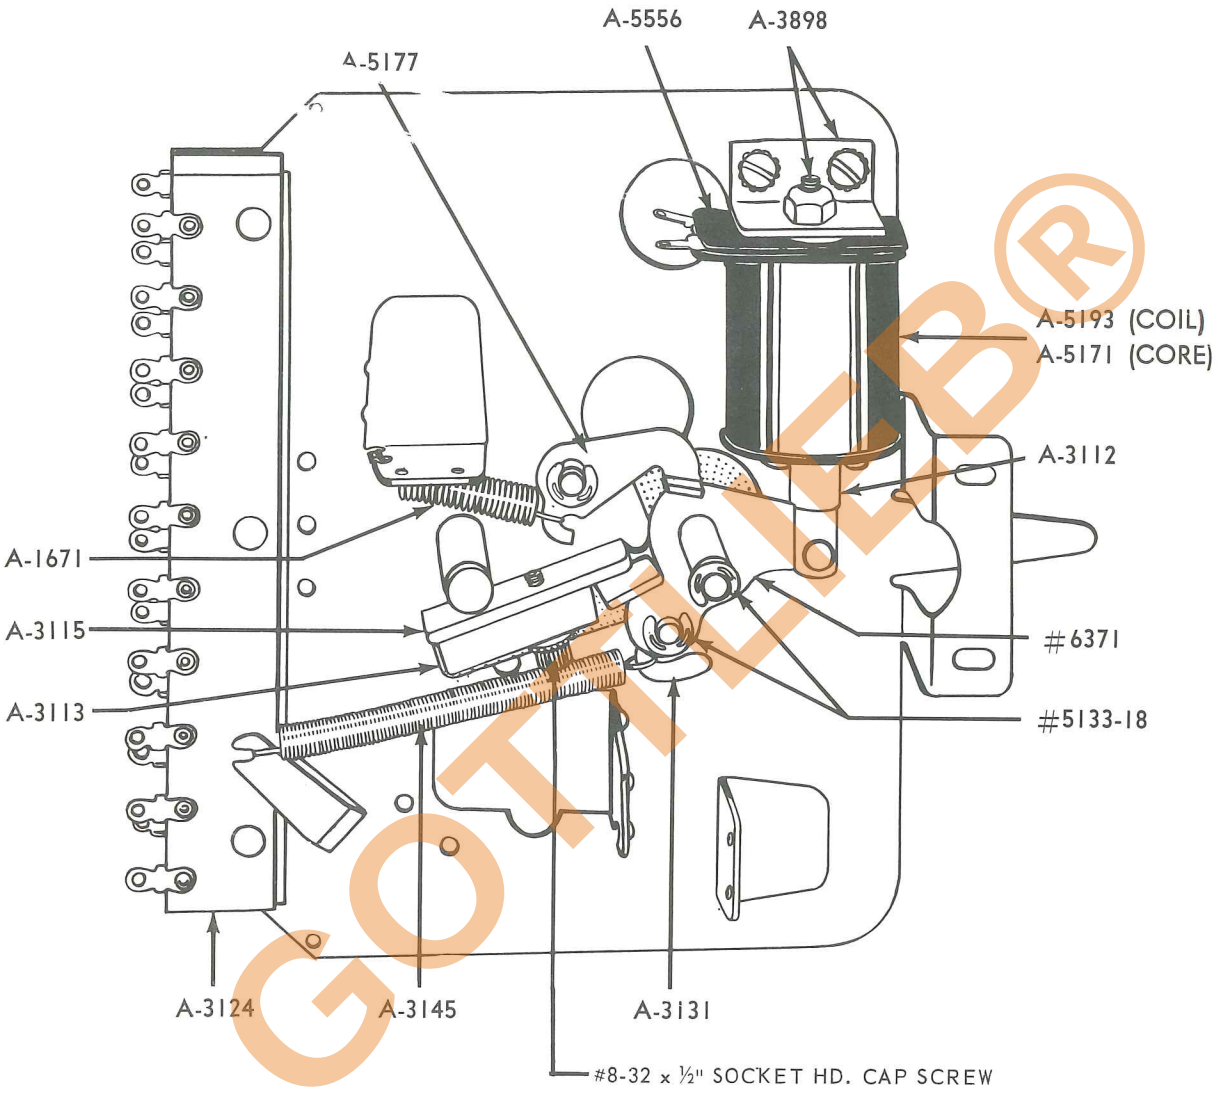

GOTTLIEB®


Adjust stop A-3115 stop so that index pawl rests exactly in base of gear tooth.

Adjust jamstop A-3113 against step-up pawl A-3131.


WHEN ORDERING PARTS, SPECIFY PART NO. AND NAME OF GAME.

10 STEP UNIT PARTS

DRUM

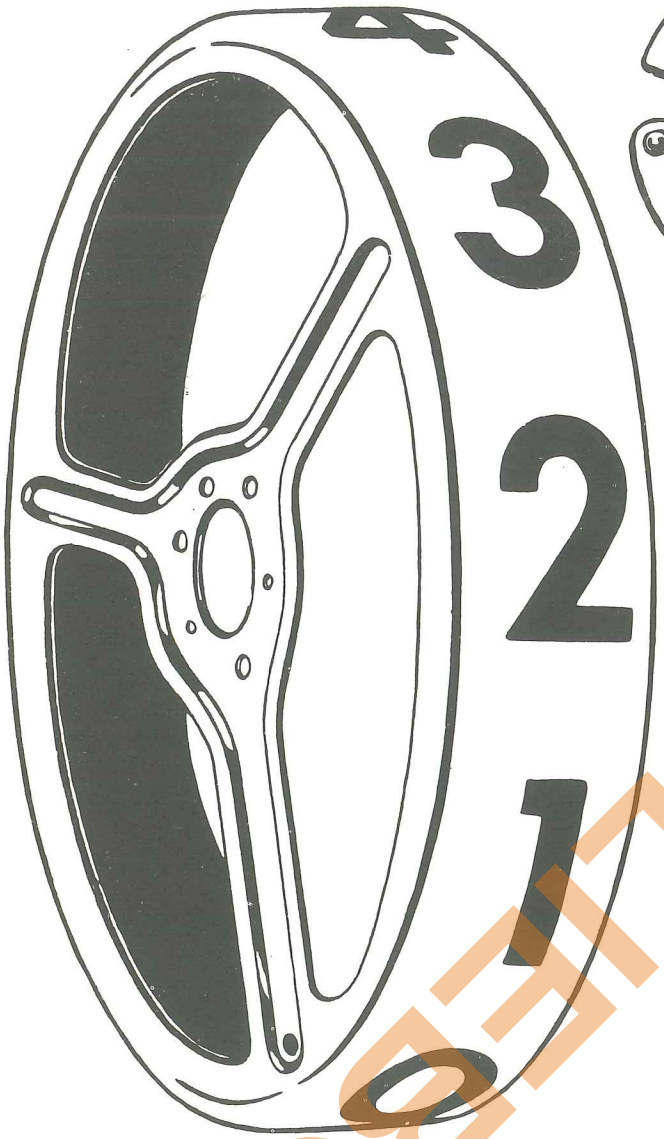


B-3134

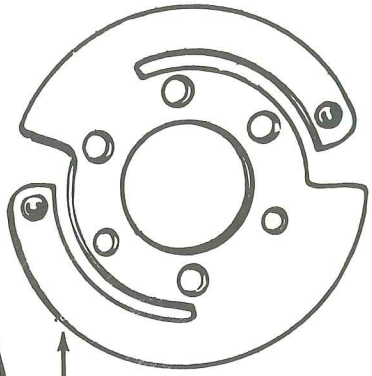

A-4430
AS SHOWN

A-4431
1 ARM CUTOFF

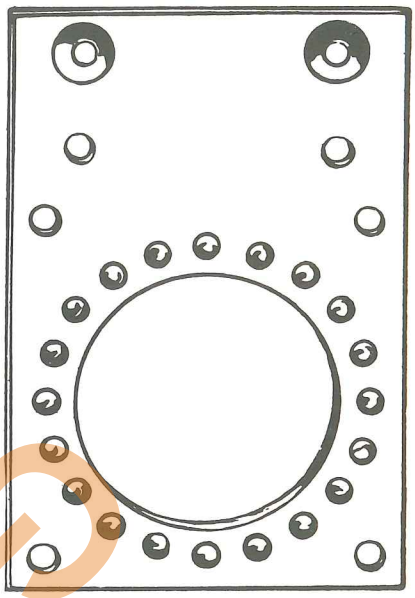

A-3123

SEE PARTS LIST BY GAME NAME FOR ORDERING COMPLETE DISC ASSEMBLY. SPECIFY UNIT POSITION AND GAME NAME


HUB GROUND WIRE FORM




A-4771

PRINTED CIRCUIT DISC

A-5951

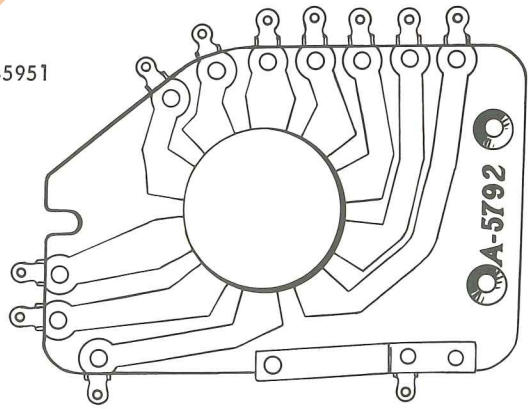


CAM & RATCHET HUB

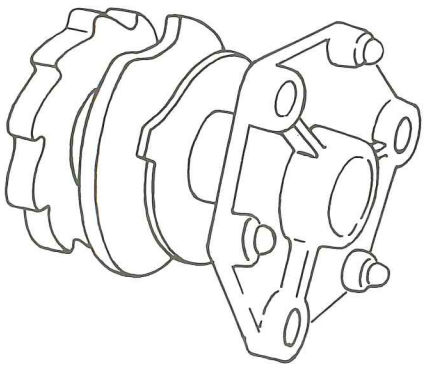


C-4770

SPIDER WASHER

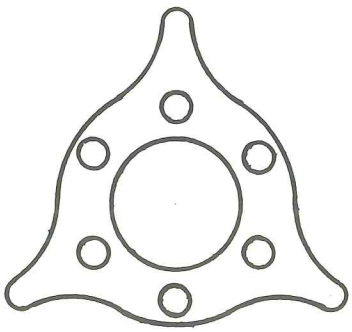

A-6362


GROUNDING WIPER

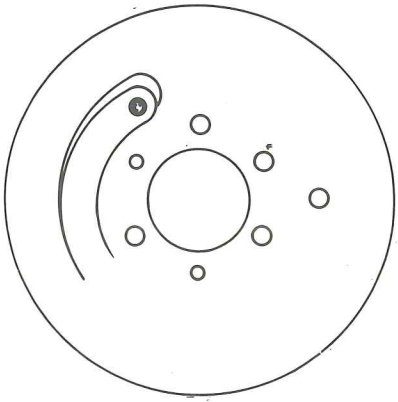

A-5886

GOTTLIEB®


TEN STEP UNIT MOUNTING SHELF

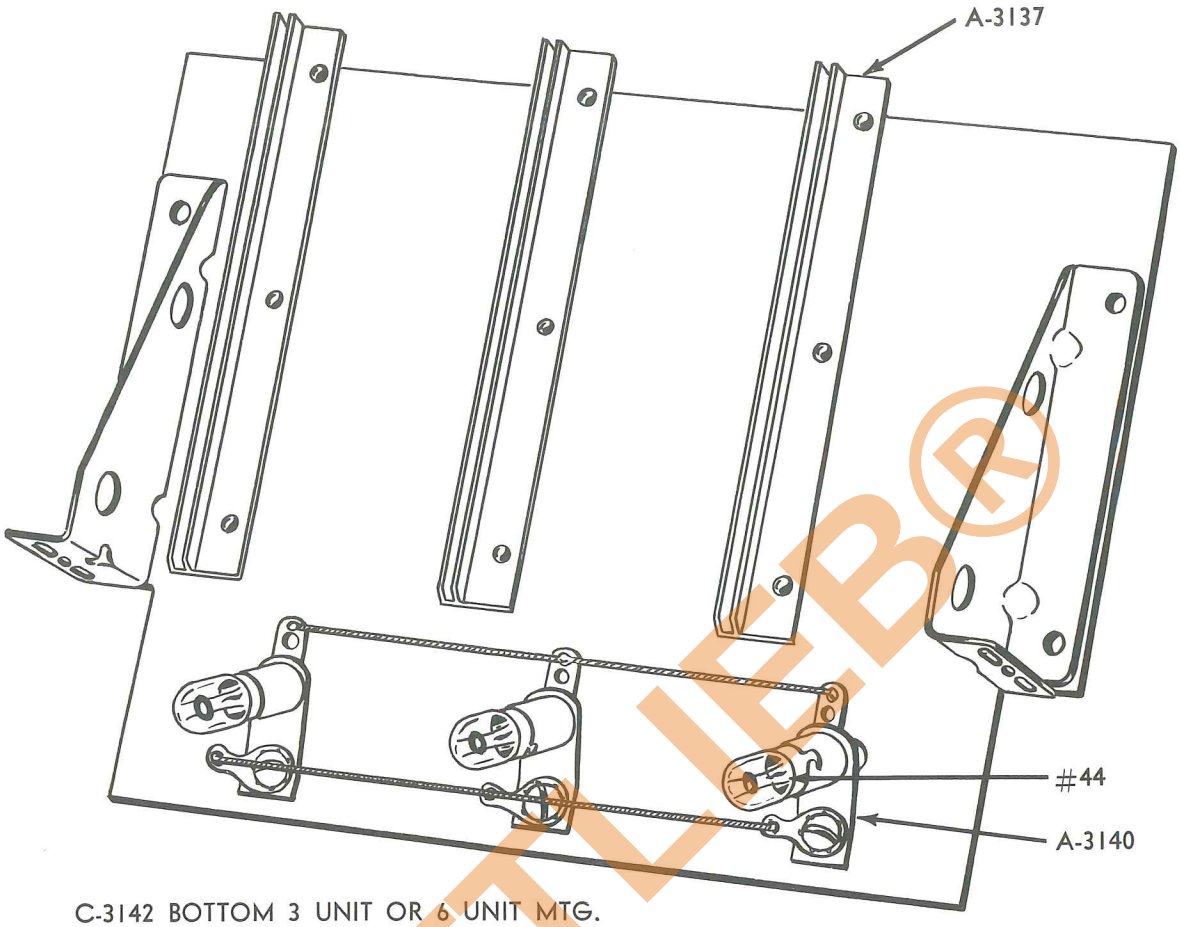


C-3142 BOTTOM 3 UNIT OR 6 UNIT MTG.
C-3143 CENTER 6 UNIT MTG.
C-3144 TOP 3 UNIT OR 6 UNIT MTG. (SHOWN)
C-5901 TOP 4 UNIT MTG.
C-5902 BOTTOM 4 UNIT MTG.

10 STEP UNIT SWITCHES

TOP CAM SWITCH #330

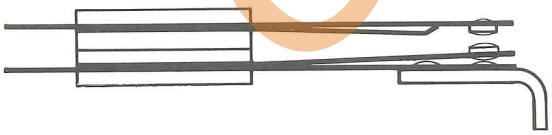


BOTTOM CAM SWITCH #331

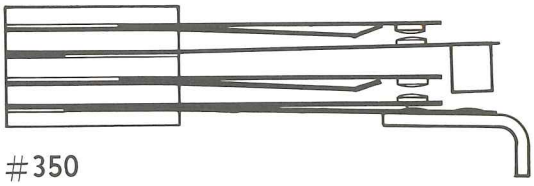


DRIVE LEVER SWITCH #350



BOTTOM CAM SWITCH #411

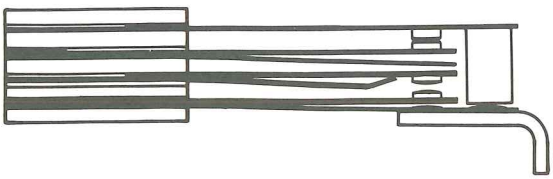


TOP CAM SWITCH #440

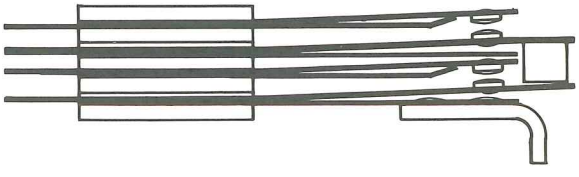


GOTTLIEB®


SMALL STEP SWITCH ANIMATION UNIT

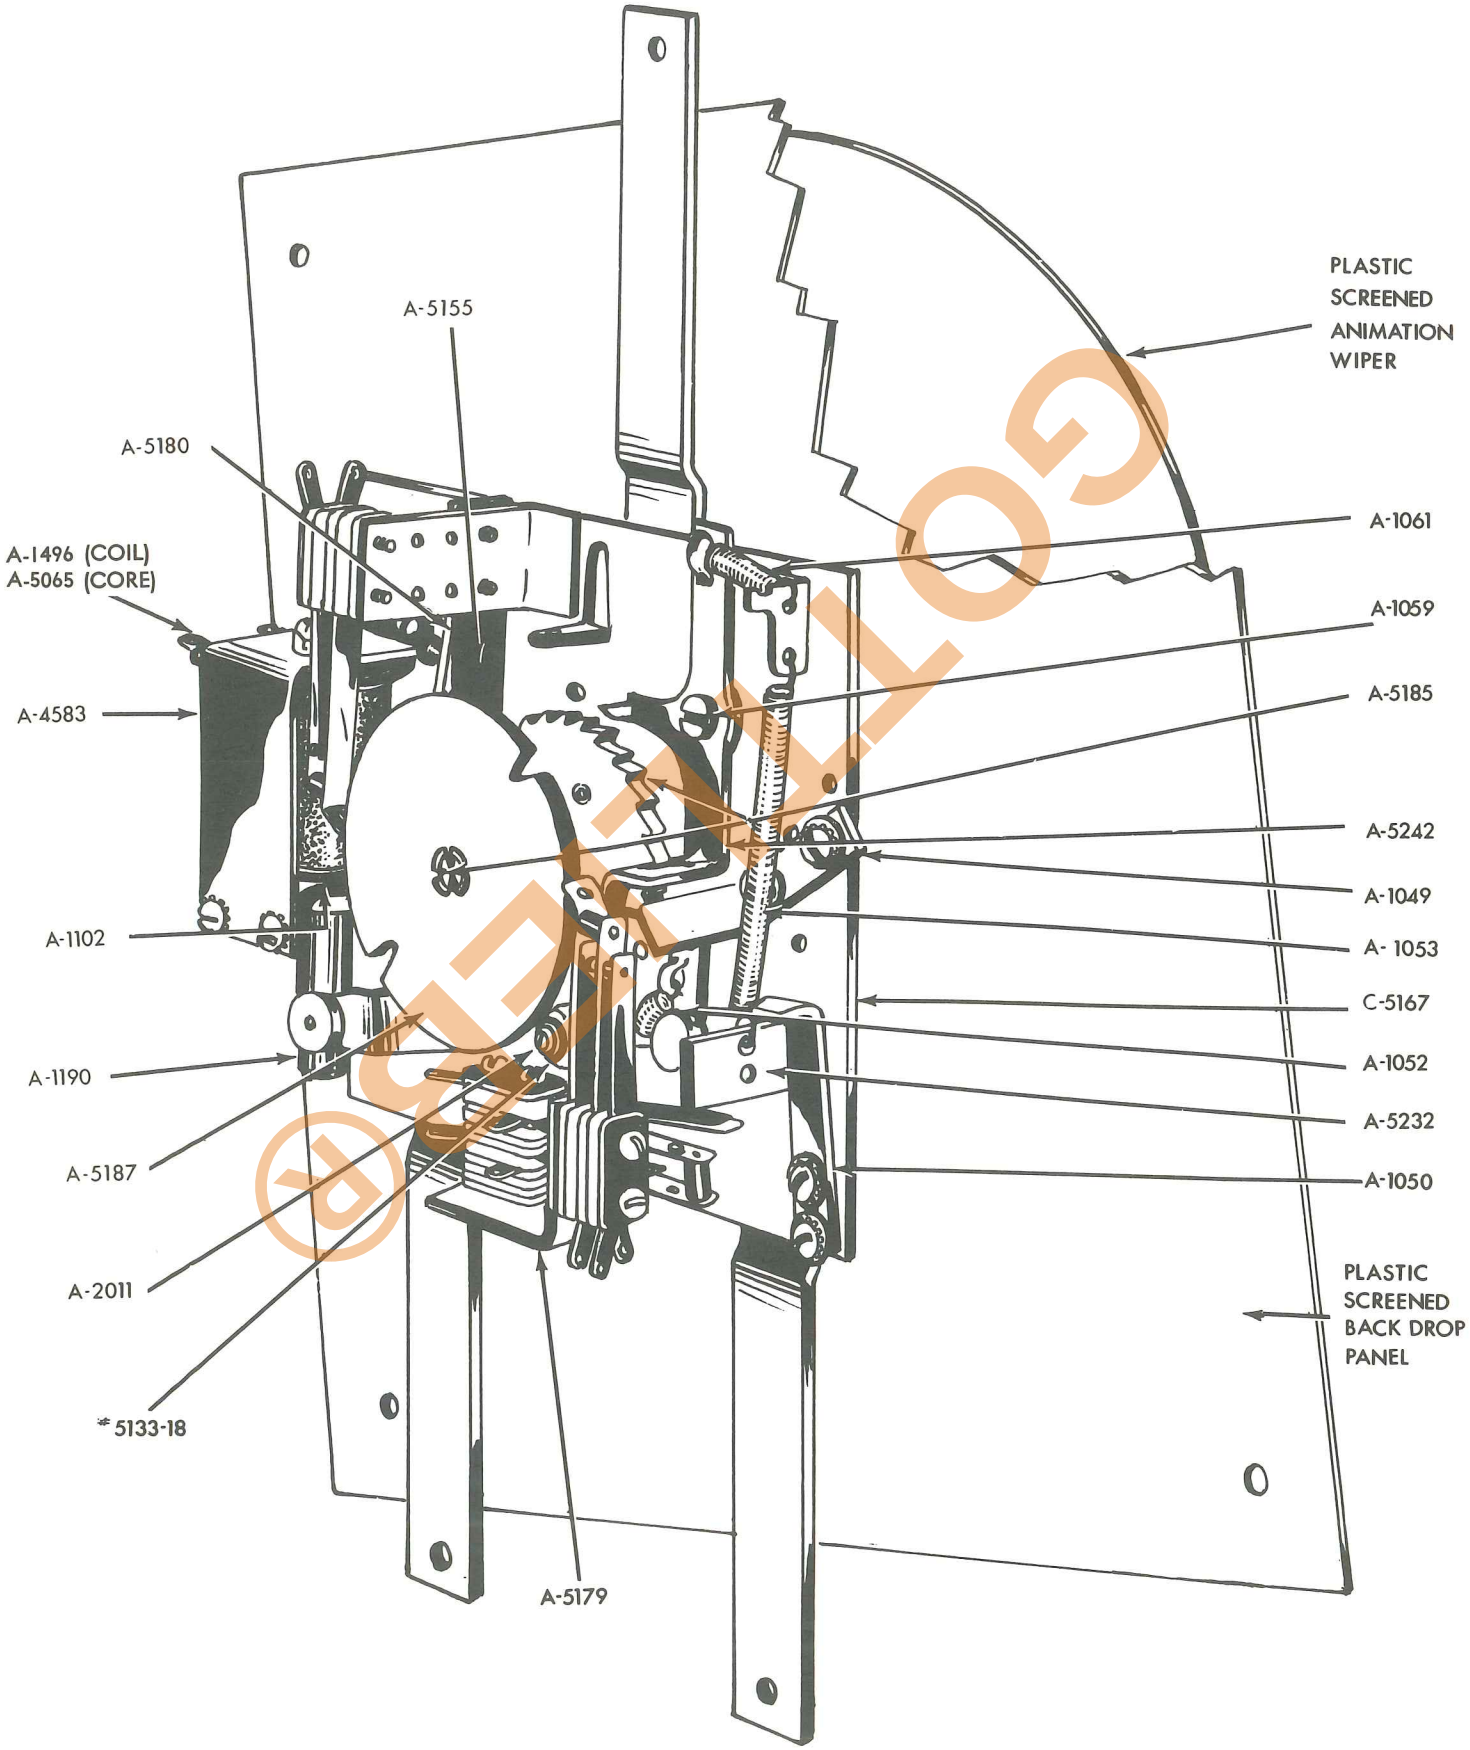


GOTTLIEB®

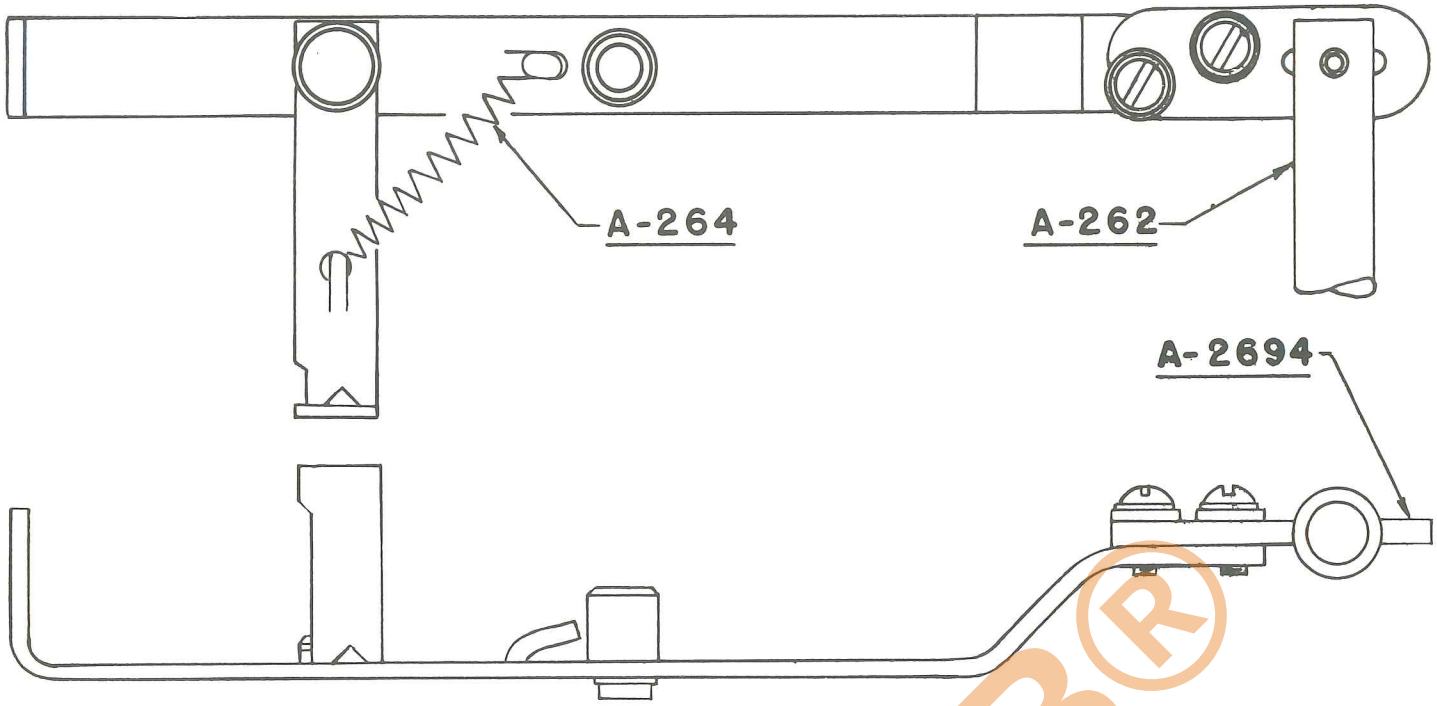

A-2696 DRIVE LEVER

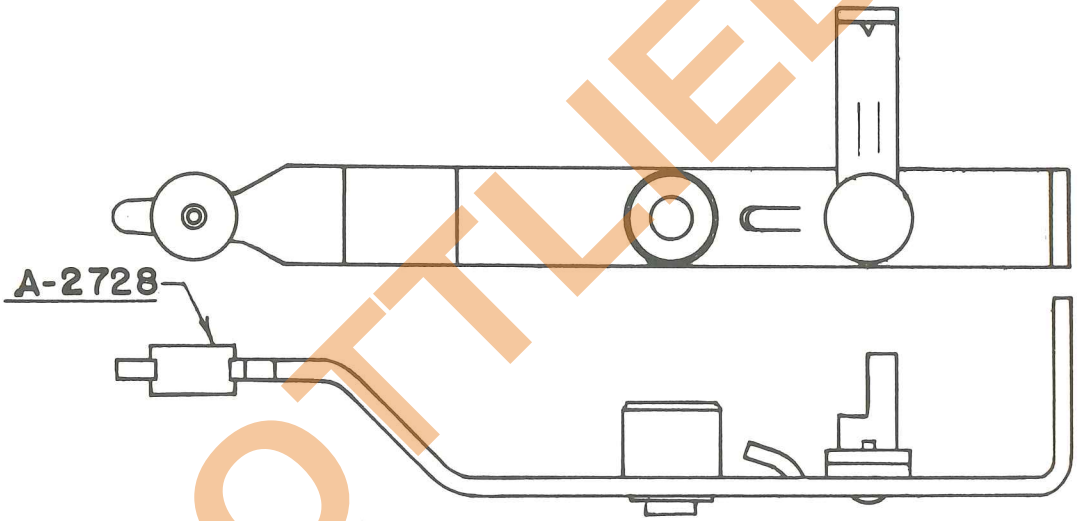


A-2848 DRIVE LEVER

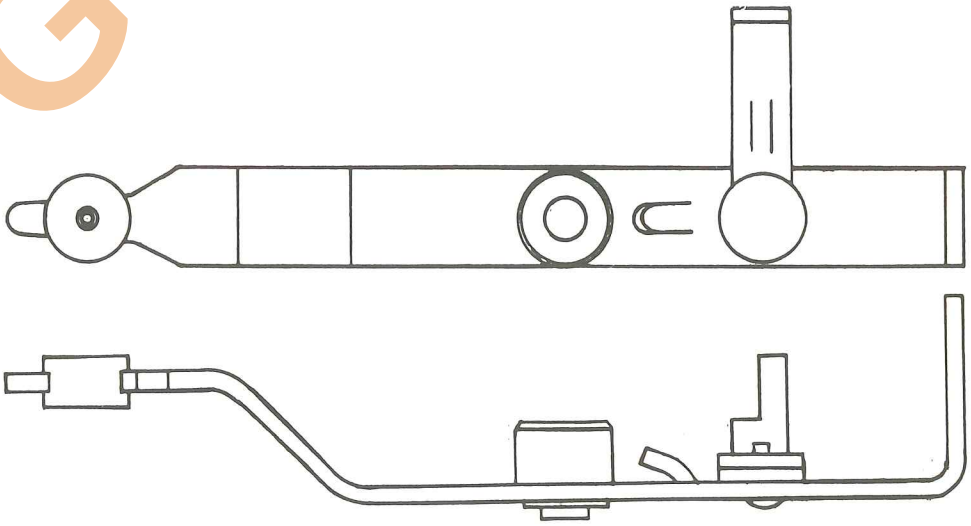


A-2849 DRIVE LEVER


GOTTLIEB®

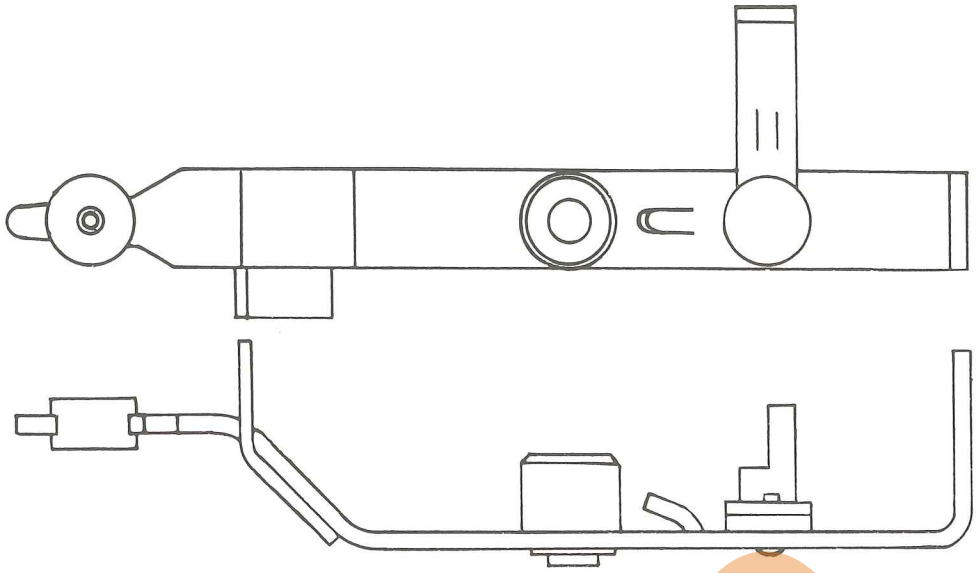

A-2850 DRIVE LEVER

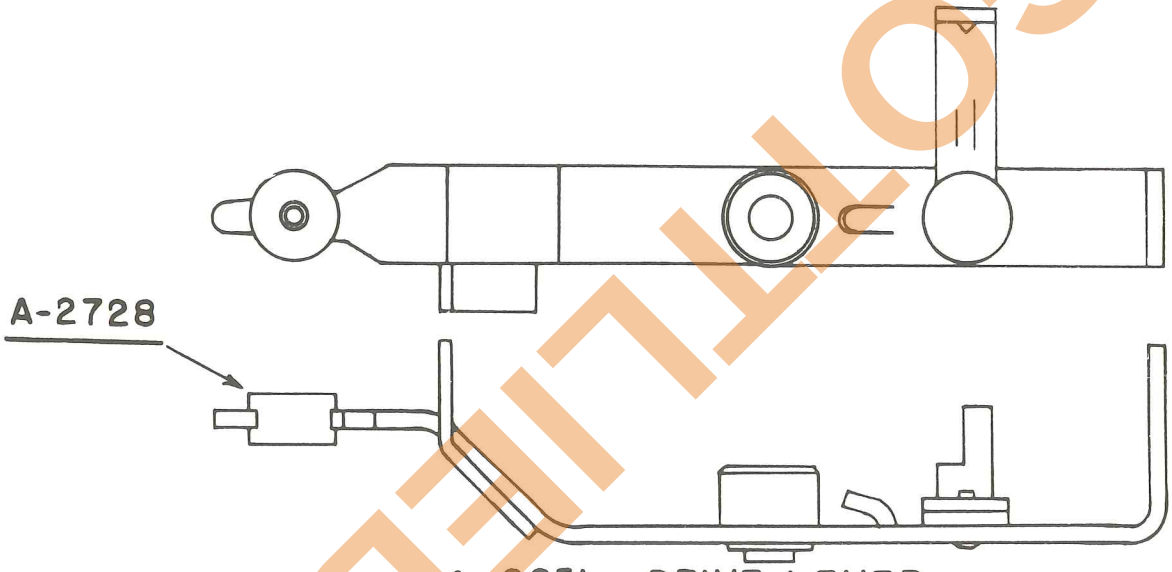


A-2851 DRIVE LEVER

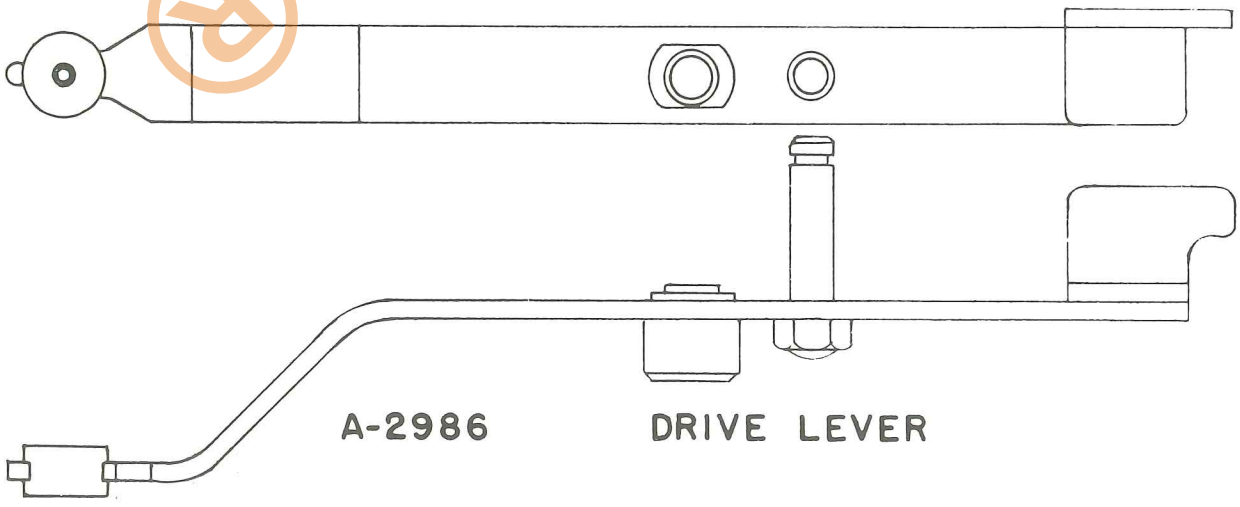


A-2986 DRIVE LEVER

GOTTLIEB®

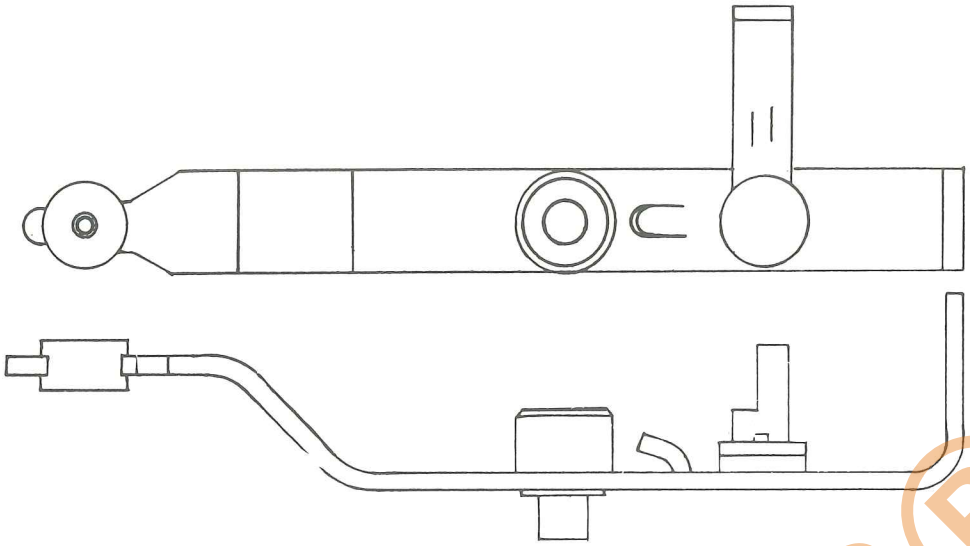


A-2987 DRIVE LEVER

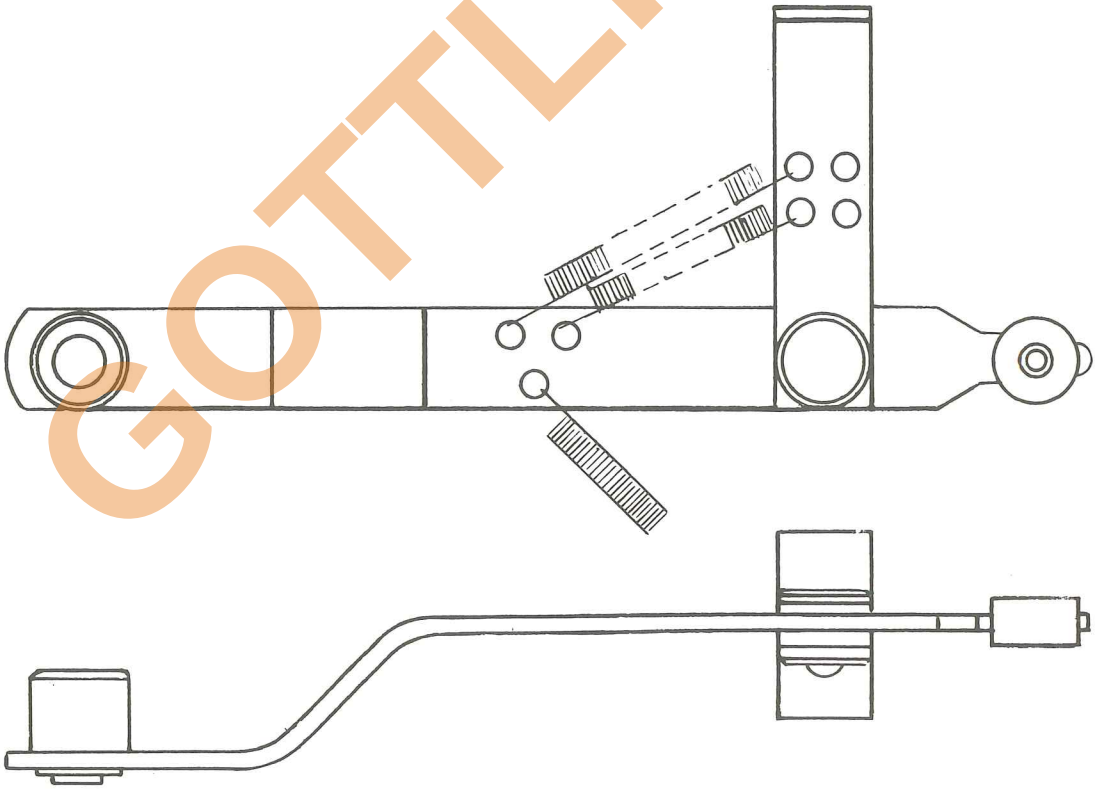


A-4272 DRIVE LEVER
A-4941 DRIVE LEVER WITH SWITCH ARM


GOTTLIEB®

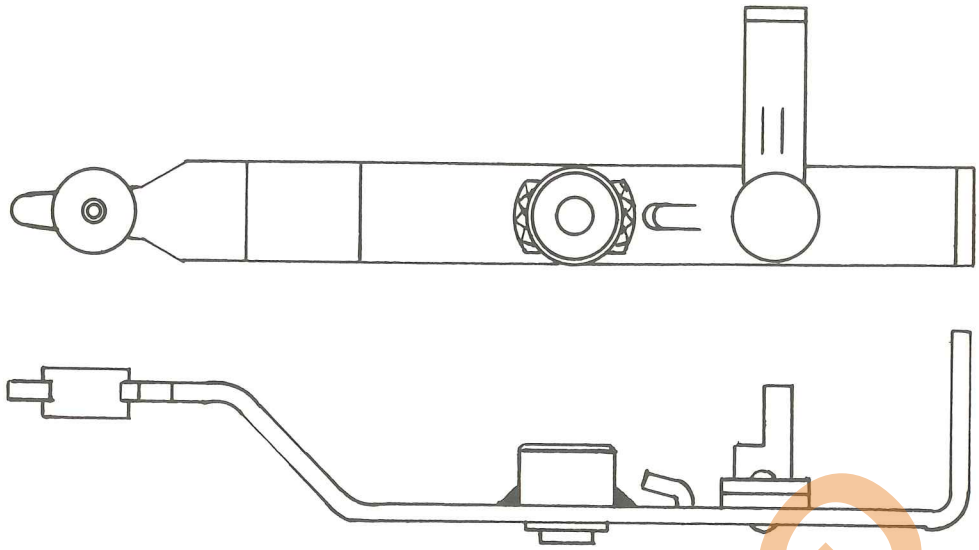

A-5487 DRIVE LEVER

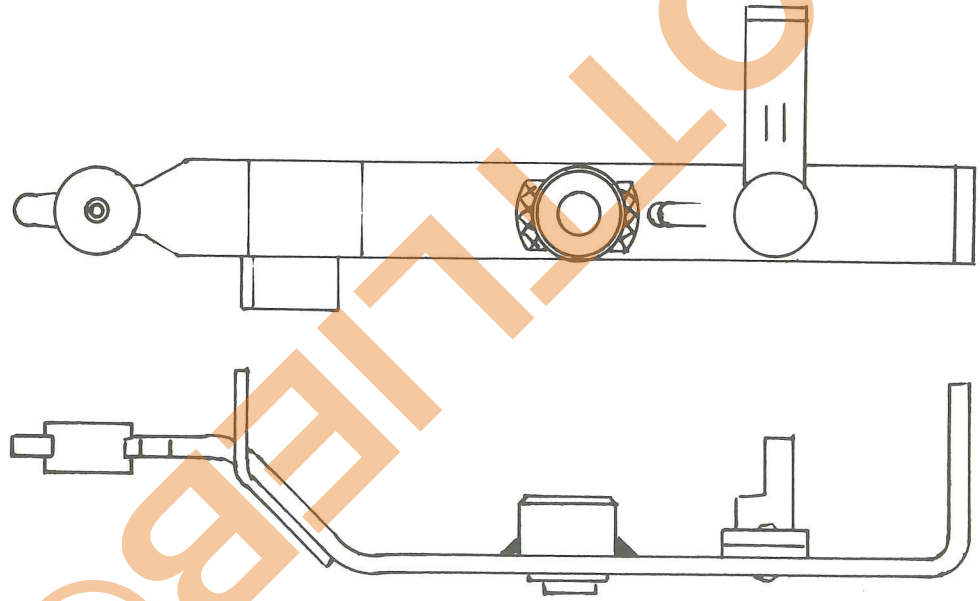


A-5639 DRIVE LEVER

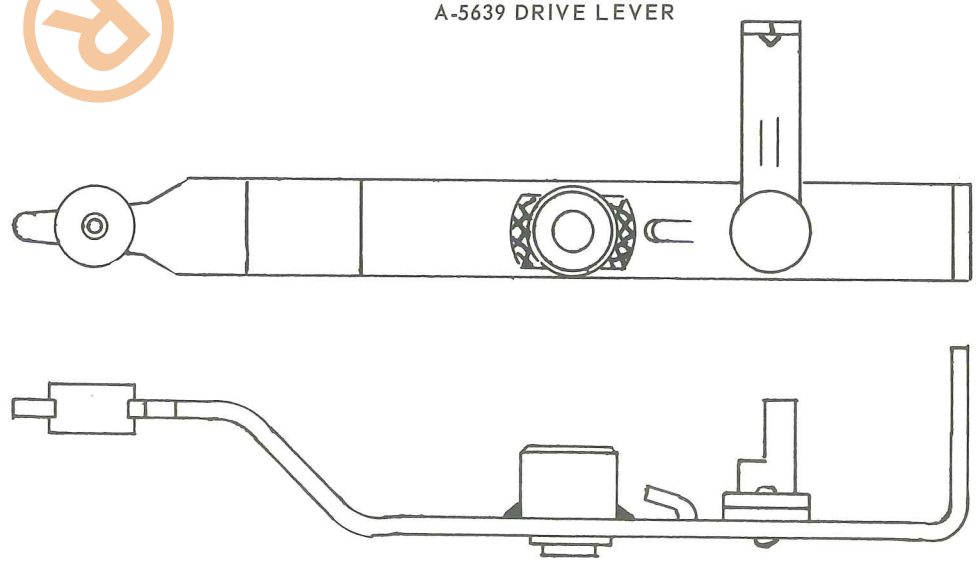


A-5952 DRIVE LEVER

GOTTLIEB®

DRIVE LEVER

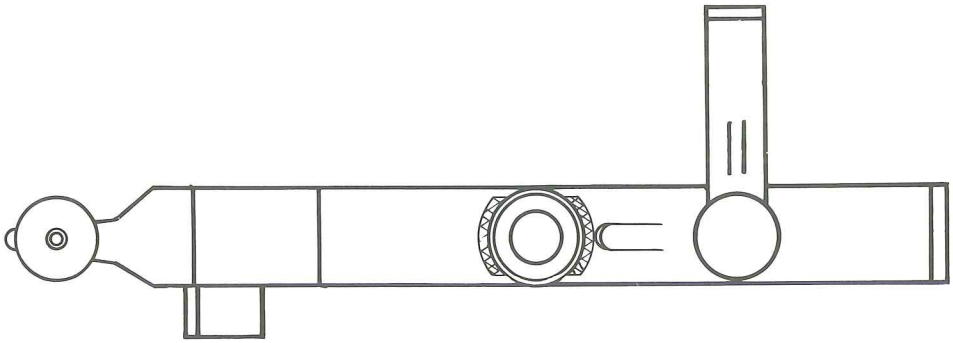

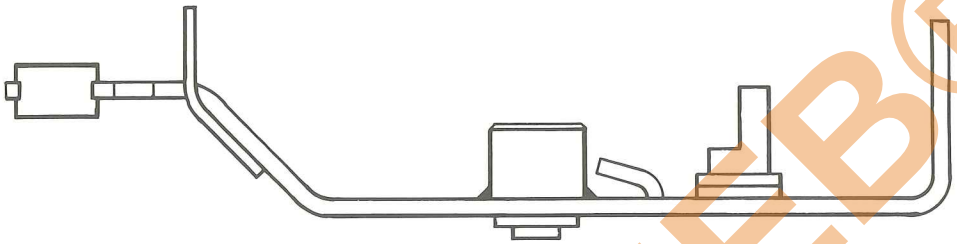


A-6442


GOTTLIEB®




A-2820
RESET LINK



A-2484
SUBTRACT PAWL

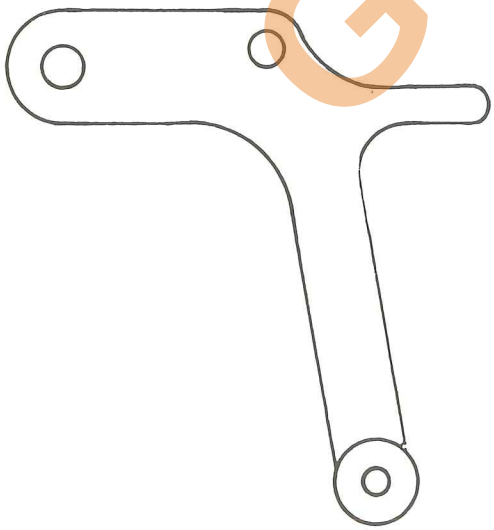


A-2522 BELL ARM

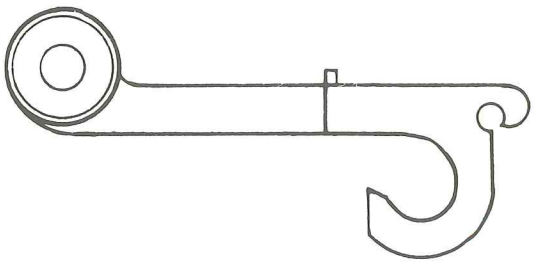


A-2698 RESET LOCKIN PAWL



A-262 PLUNGER



A-272 PLUNGER




A-1190 PLUNGER



A-1329 PLUNGER



A-5063 PLUNGER



A-1775 PLUNGER




A-2663 PLUNGER



A-3112 PLUNGER




A-5991 PLUNGER



A-7652

ASSEMBLY PLUNGER AND TIP

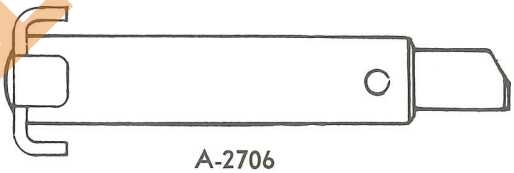


A-2706

KICKER PLUNGER


UNIT MOUNTING BRACKETS




A-6944



A-6945



A-6943




A-6942

HAIRPIN FASTENER




A-6947




A-6941


GOTTLIEB®

SMALL STEP SWITCH WIPERS

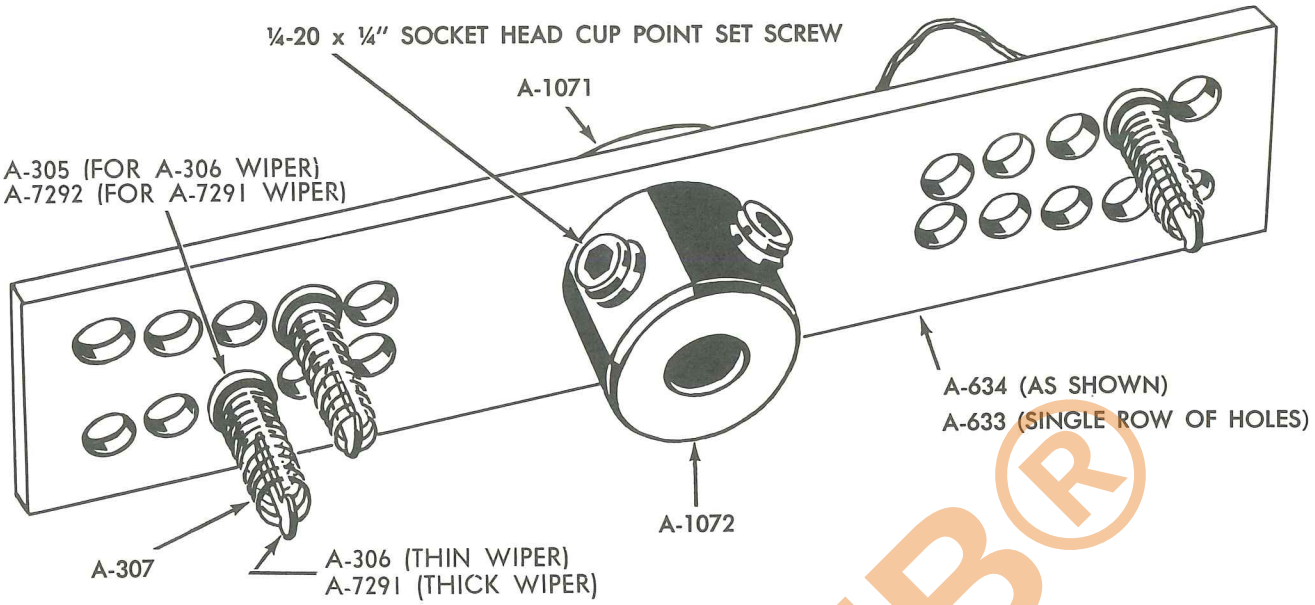

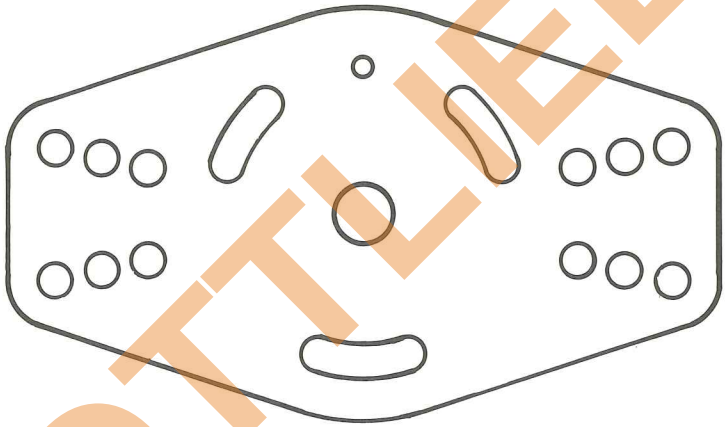


B-6667

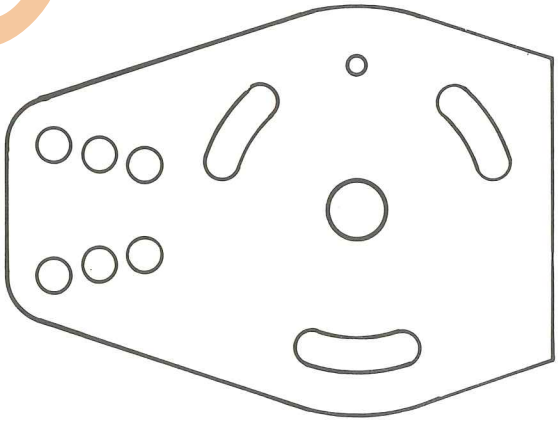


A-6668

GOTTLIEB®

SMALL STEP SWITCH WIPERS

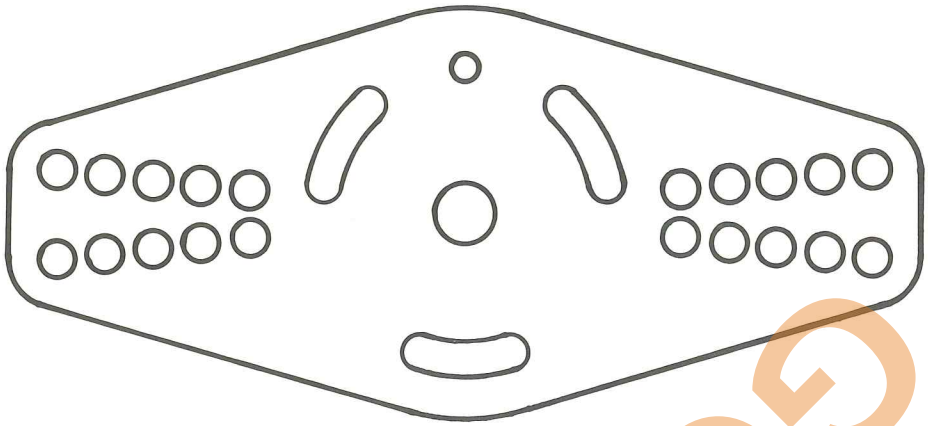


B-6506

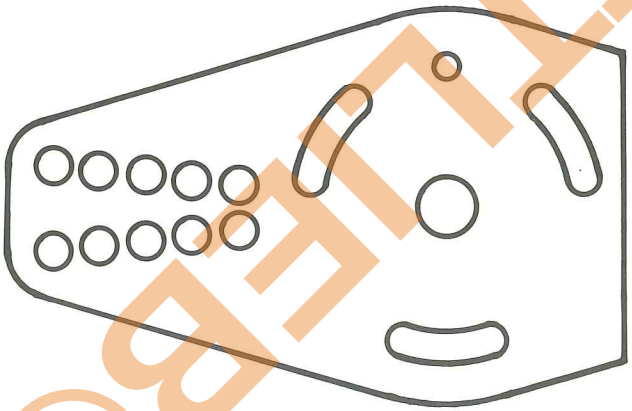

A-6507


GOTTLIEB®

WIPER MOUNTING SPIDER




B-6498

WIPER COVER PLATE




A-6550

"R" TYPE RELAY (normally open)

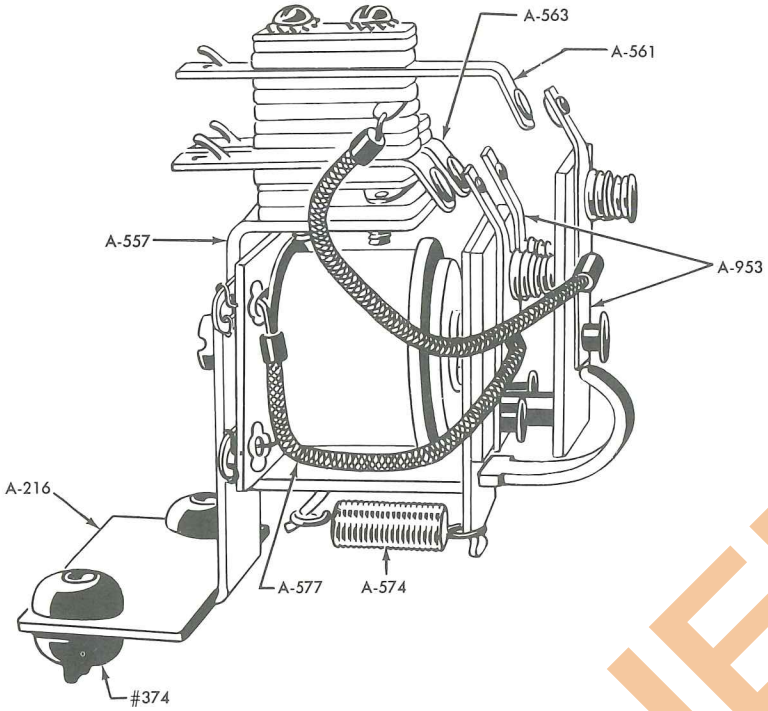


"R" TYPE RELAY (normally closed)

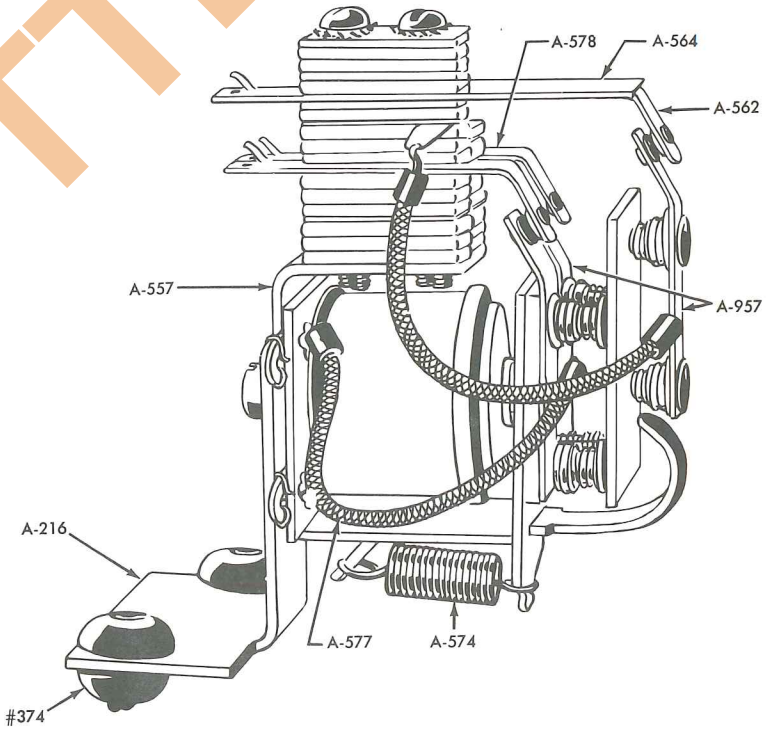

GOTTLIEB®

WHEN ORDERING PARTS,
SPECIFY PART NO. AND NAME OF GAME.

"R" TYPE RELAY

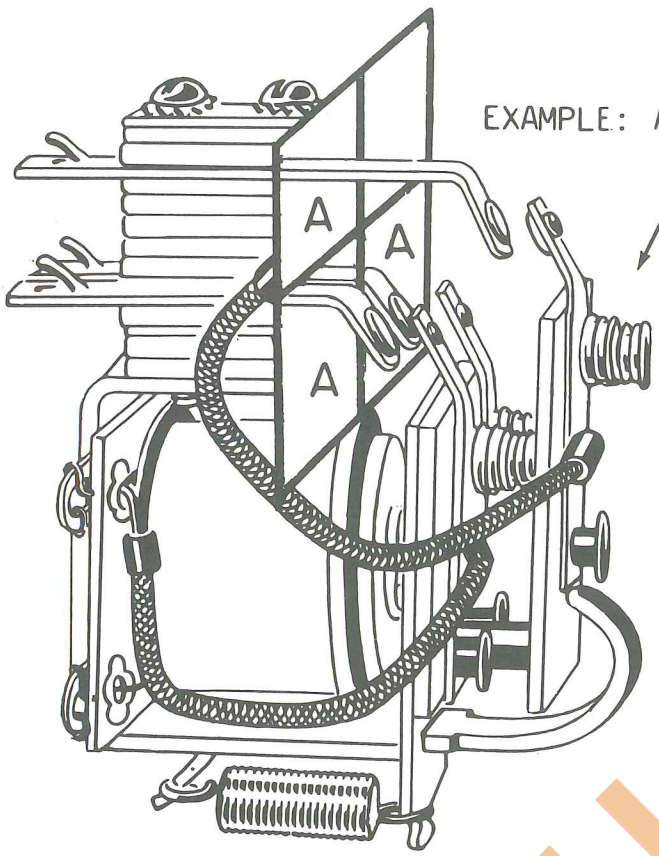

PART NUMBERS FOR COMPLETE ARMATURE ASSEMBLY ONLY.

COIL TERMINALS FACE TO LEFT WHEN VIEWED FROM ARMATURE END OF RELAY.


A = MAKE SWITCH
B = BREAK SWITCH
C = SINGLE POLE DOUBLE THROW

A-951	A-952	A-953	A-954	A-955
A-956	A-957	A-958	A-959	A-960
A-961	A-962	A-3027	A-963	A-964


A-4629	A-4429
A-4887	A-5139

GOTTLIEB®

"AG" TYPE RELAY

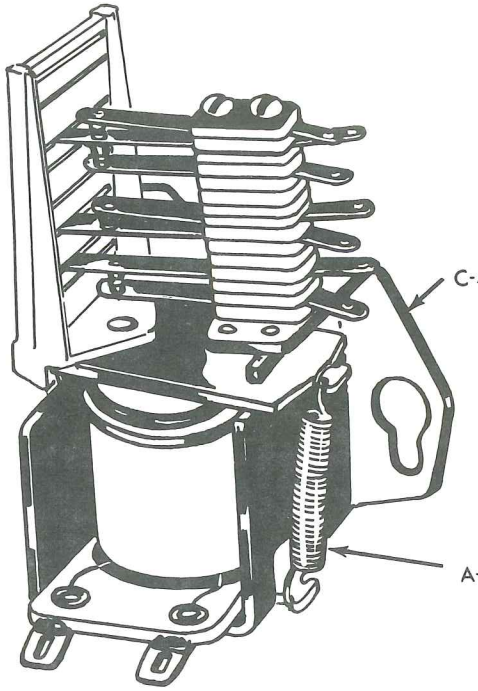



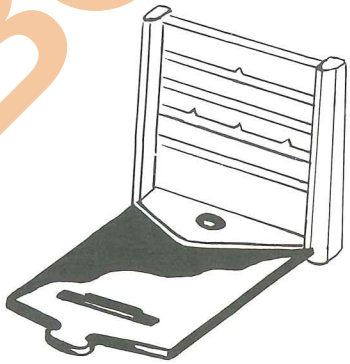


ADJUST LOCKIN BLADE FOR .010 GAP

ADJUST OTHER BLADES FOR .019 GAP


GOTTLIEB®

"AG" SWITCH STACK

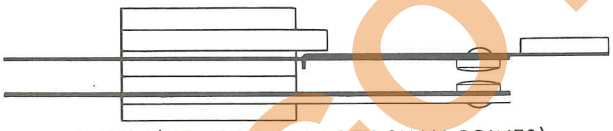


A-5363 (LOCKIN MAKE WITH SMALL POINTS)

"AG" SWITCH STACK

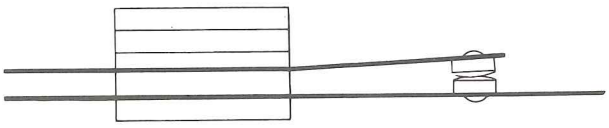


A-5366 (BREAK WITH SMALL POINTS)

"AG" SWITCH STACK

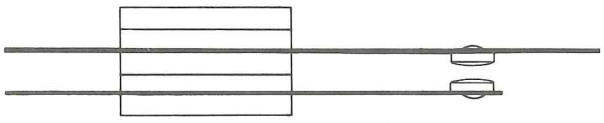


A-5364 (MAKE WITH SMALL POINTS)

"AG" SWITCH STACK

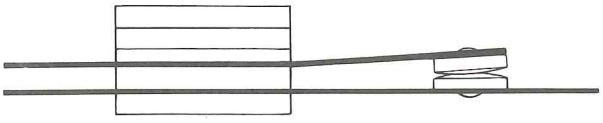


A-5367 (BREAK WITH LARGE POINTS)

"AG" SWITCH STACK

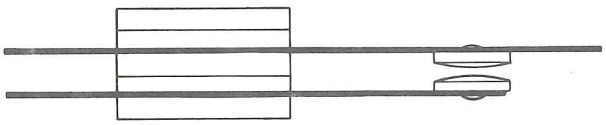


A-5365 (MAKE WITH LARGE POINTS)

"AG" SWITCH STACK

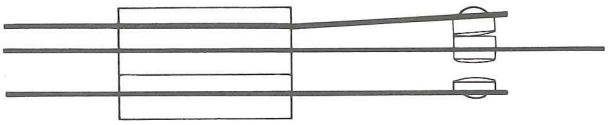

A-5368 (BREAK-MAKE WITH SMALL POINTS)


MAGNET TYPE RELAY

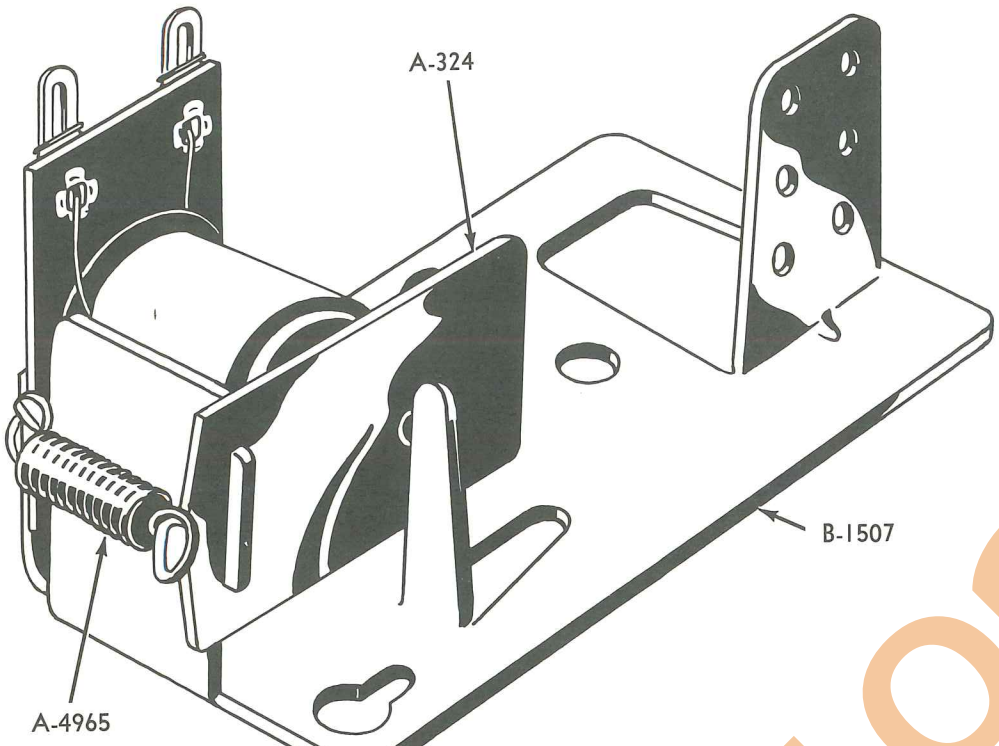

GOTTLIEB®

SILVER CONTACT POINTS


(SHOWN OVERSIZE)

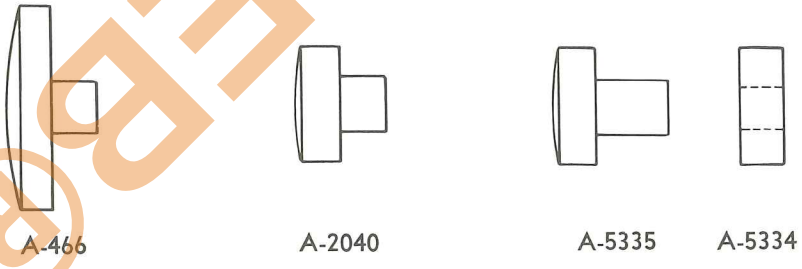




RELAY BANK


SOLID MOUNTING

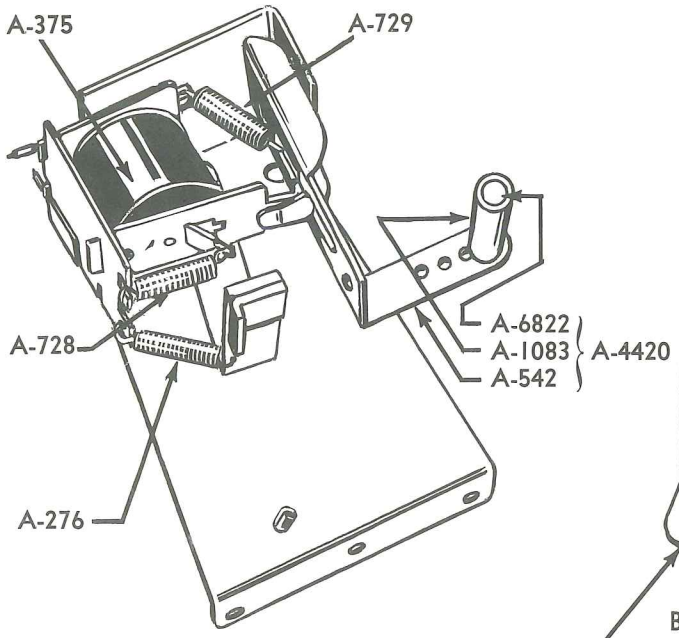


SWING UP MOUNTING

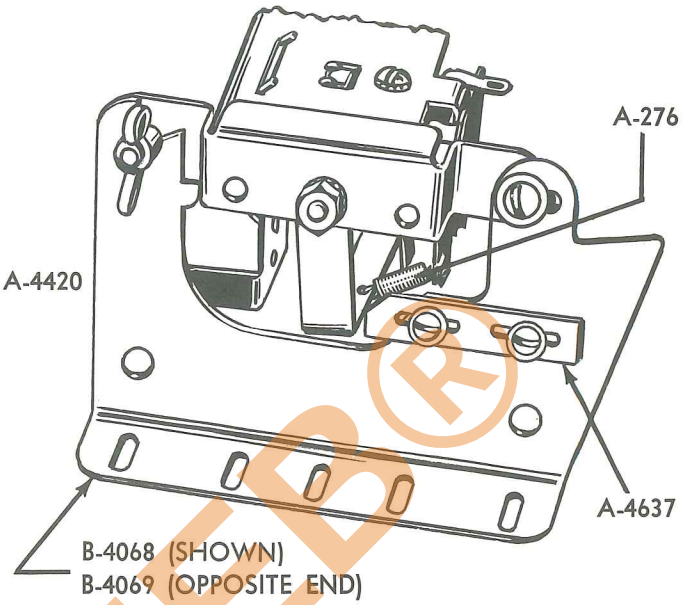

BANK SETUP ASSEMBLY

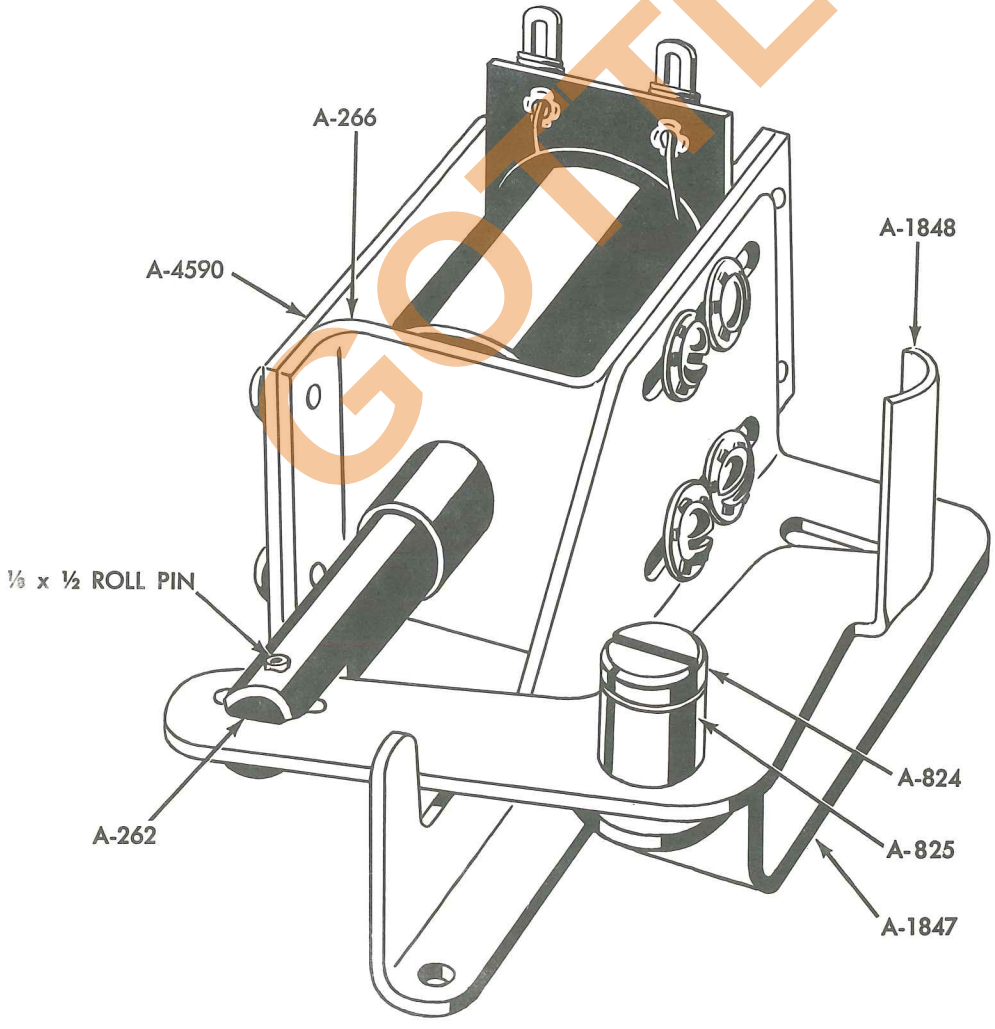


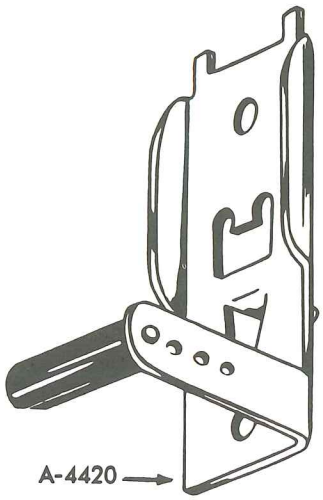


WHEN ORDERING PARTS, SPECIFY PART NO. AND NAME OF GAME.

GOTTLIEB®

CONTACT KICKER (with link)

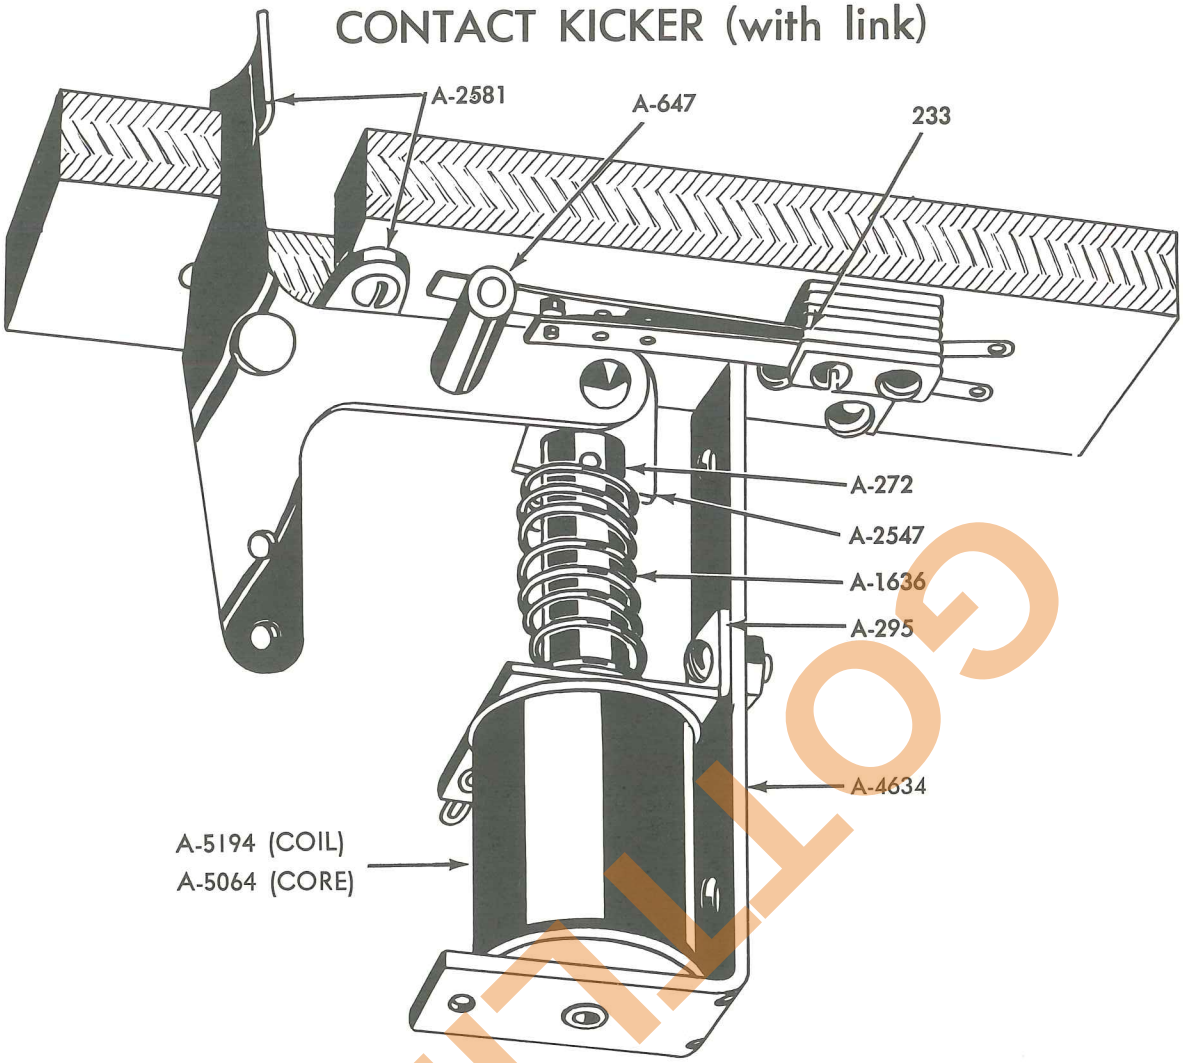


TOOLS

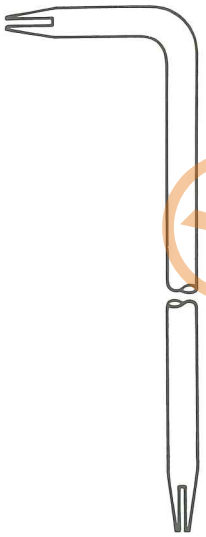

CONTACT ADJUSTER
A-4515




FEELER GAGE
A-5419 — .010 THK.
A-5420 — .019 THK.

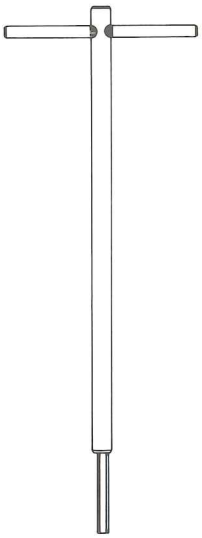

A-818 (⅛" ACROSS FLATS)
FITS ¼" SET SCREWS
A-4726 (3/32" ACROSS FLATS)
FITS #10 & #12 SET SCREWS
A-6513 (9/64" ACROSS FLATS)
FITS #8 CAP SCREWS


GOTTLIEB®

FLIPPER

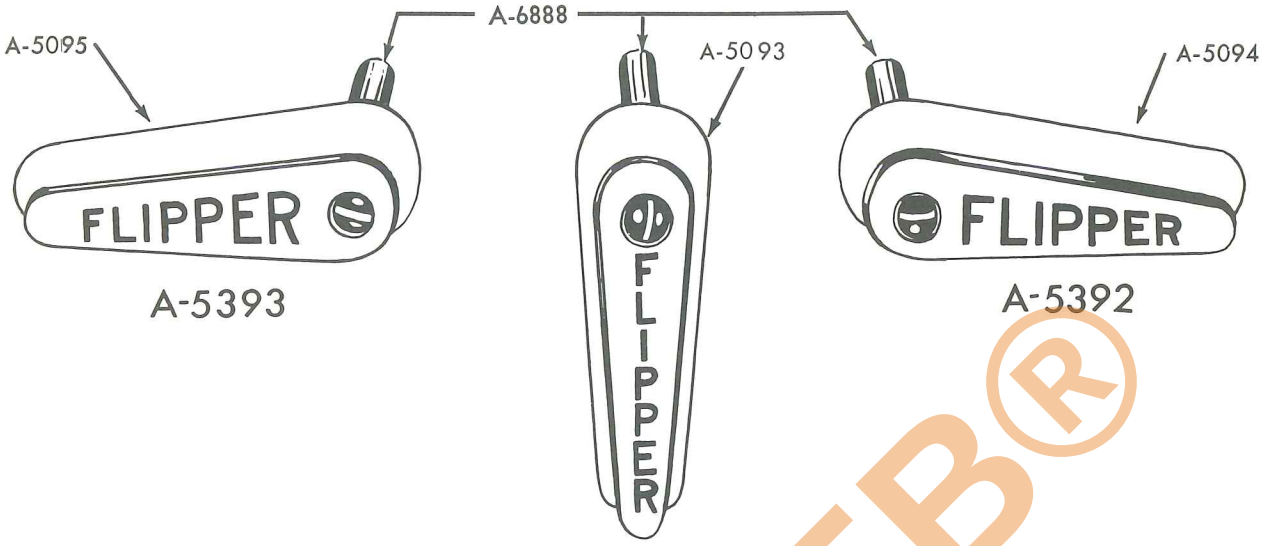


GOTTLIEB®


FLIPPER ASSEMBLY

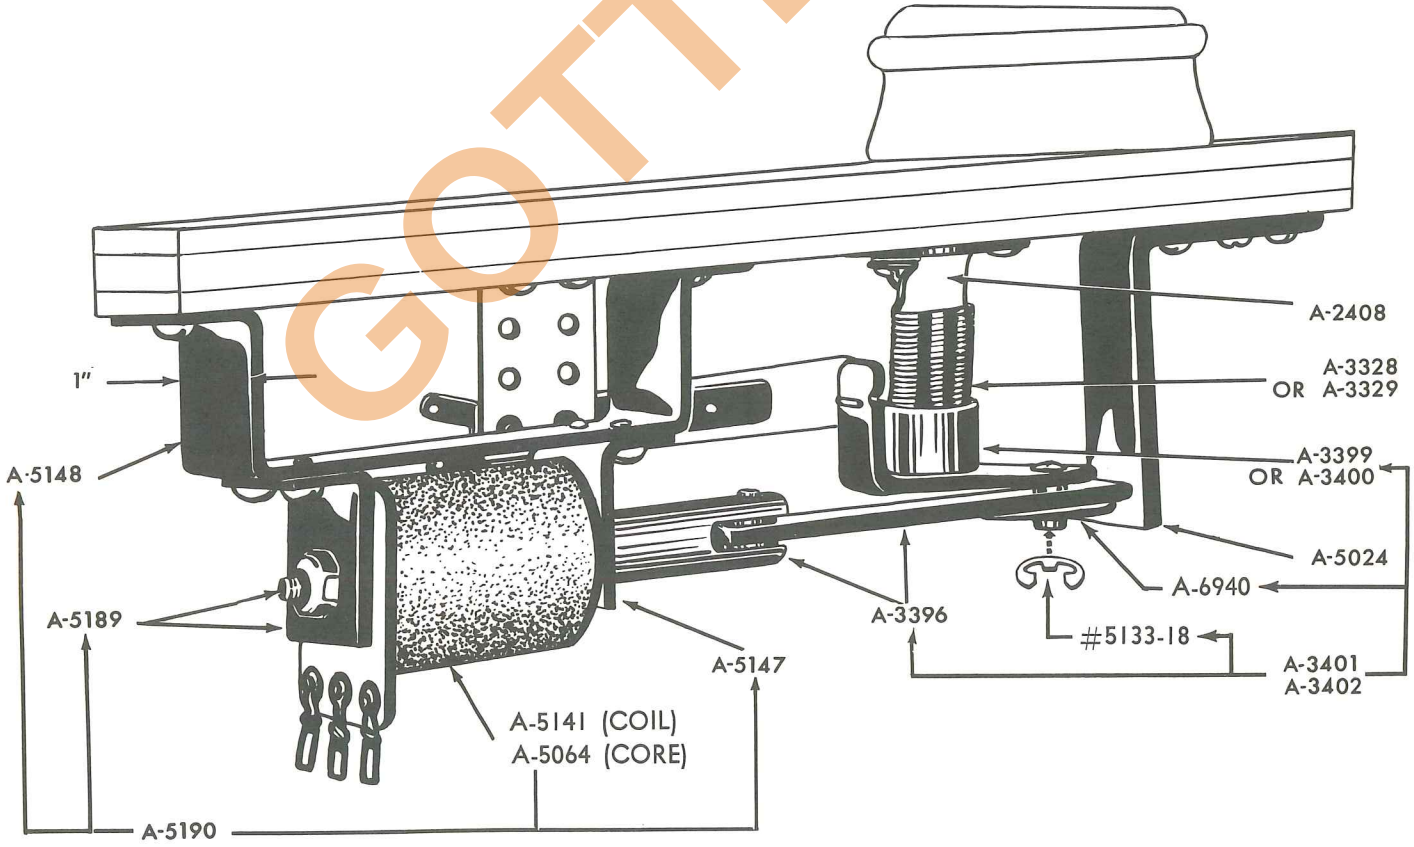


PARTS FOR FLIPPERS

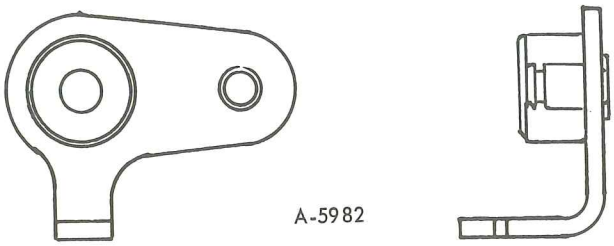


A-5982

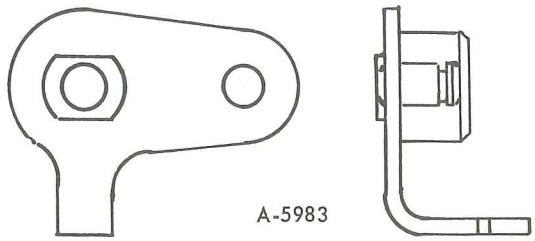


A-5983

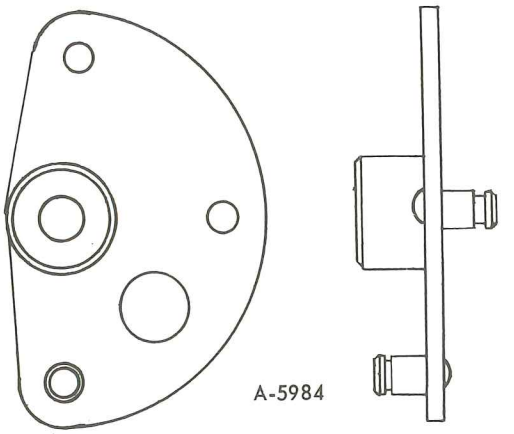

A-5984

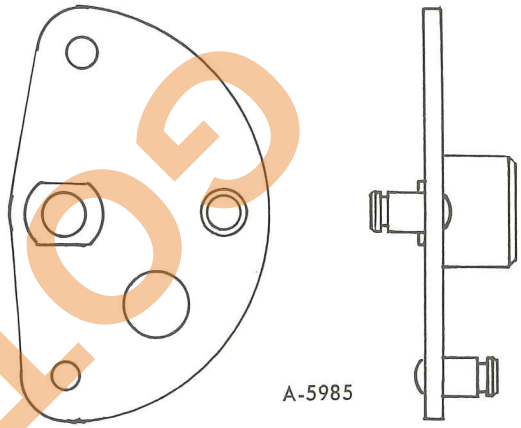


A-5985

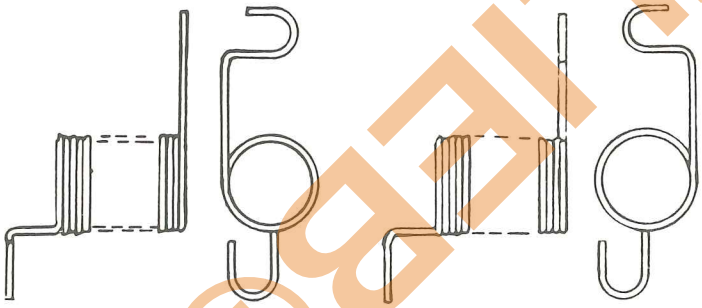


A-3328 "L" A-3329 "R"

FLIPPER RETURN SPRING

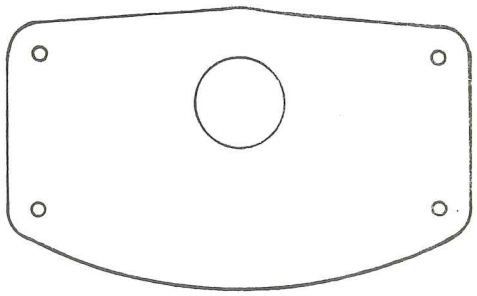

A-3927

FLIPPER BUTTON GUARD

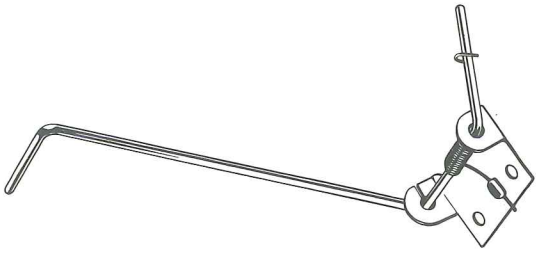


PUSH BUTTON SWITCH LINK ASSEMBLY

A-4263	ALL 5 BALL CABINETS, RIGHT OR LEFT SIDE
A-4264	MULTIPLE PLAYER CABINET, LEFT SIDE
A-4265	MULTIPLE PLAYER CABINET, RIGHT SIDE
A-6095	MODEL "SL" MULTIPLE PLAYER CABINET, RIGHT SIDE
A-6096	MODEL "SL" MULTIPLE PLAYER CABINET, LEFT SIDE


GOTTLIEB®

BALL HOLE KICKER

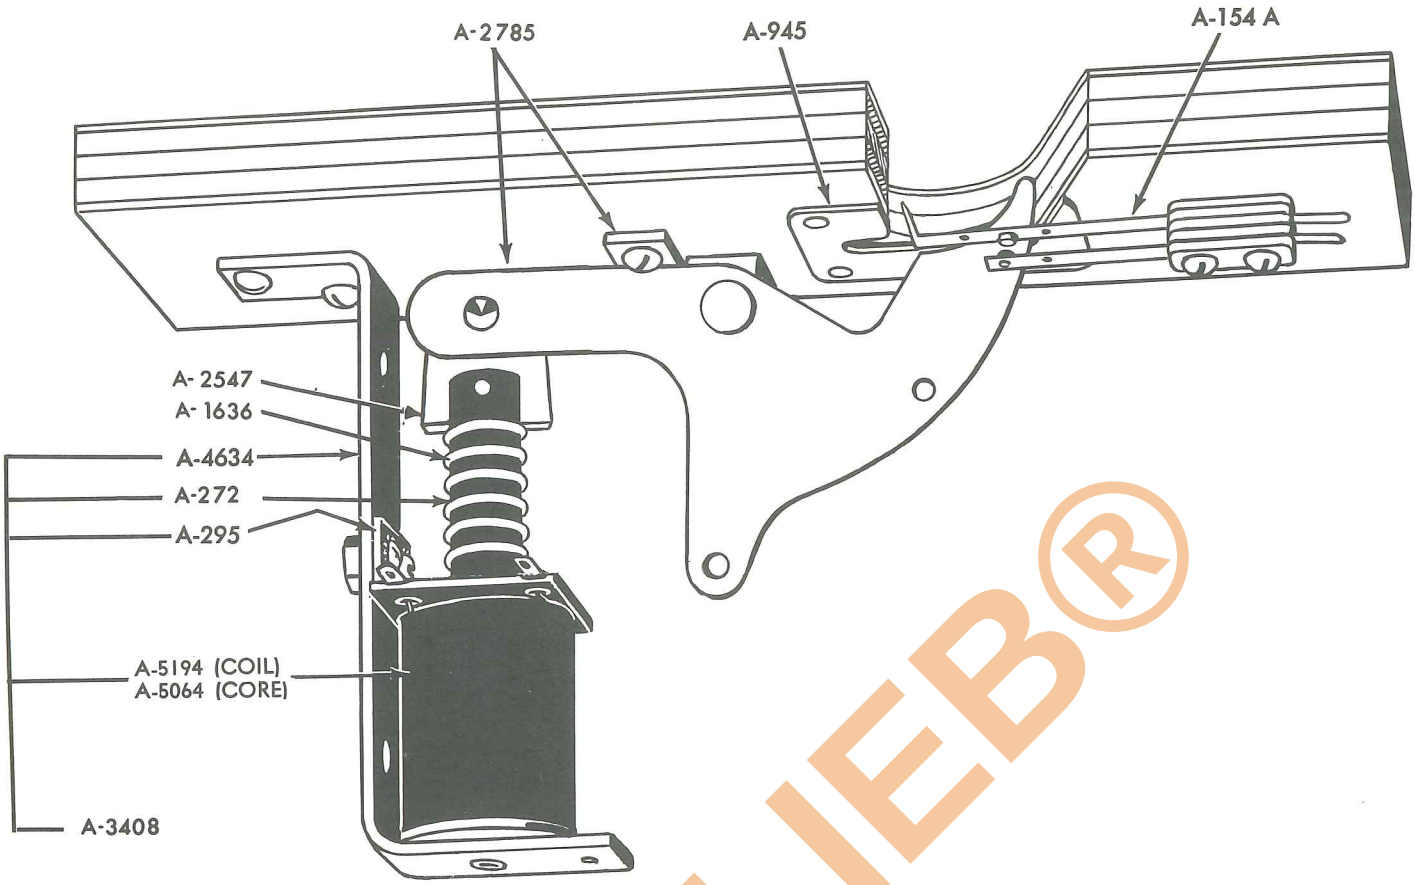


GOTTLIEB®

BALL HOLE KICKER

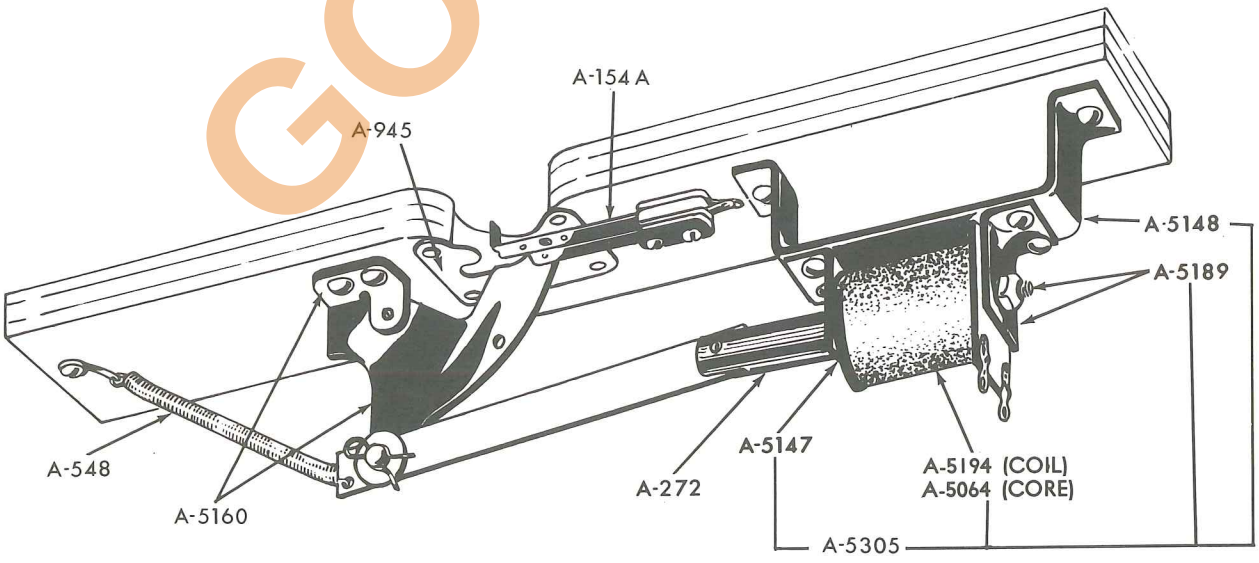


BALL SHOOTER PLUNGER ASSEMBLY

B-5918 (9 " LONG) B-5919 (10¾" LONG) B-6178 (9⅝" LONG)

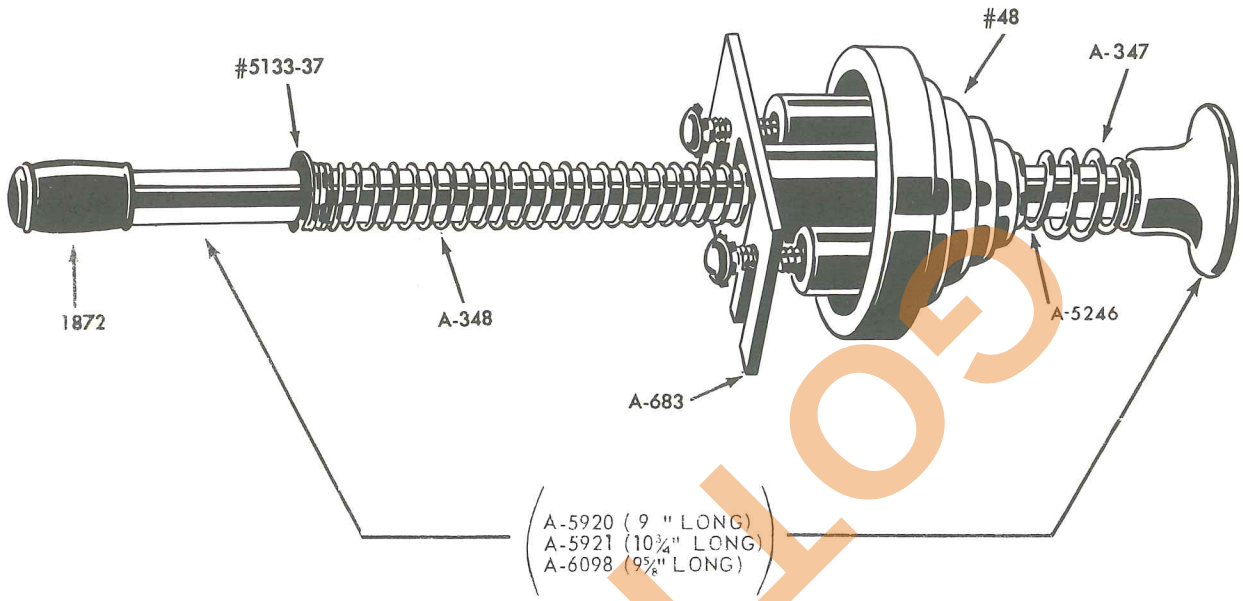


BALL LIFT PUSH ROD ASSEMBLY

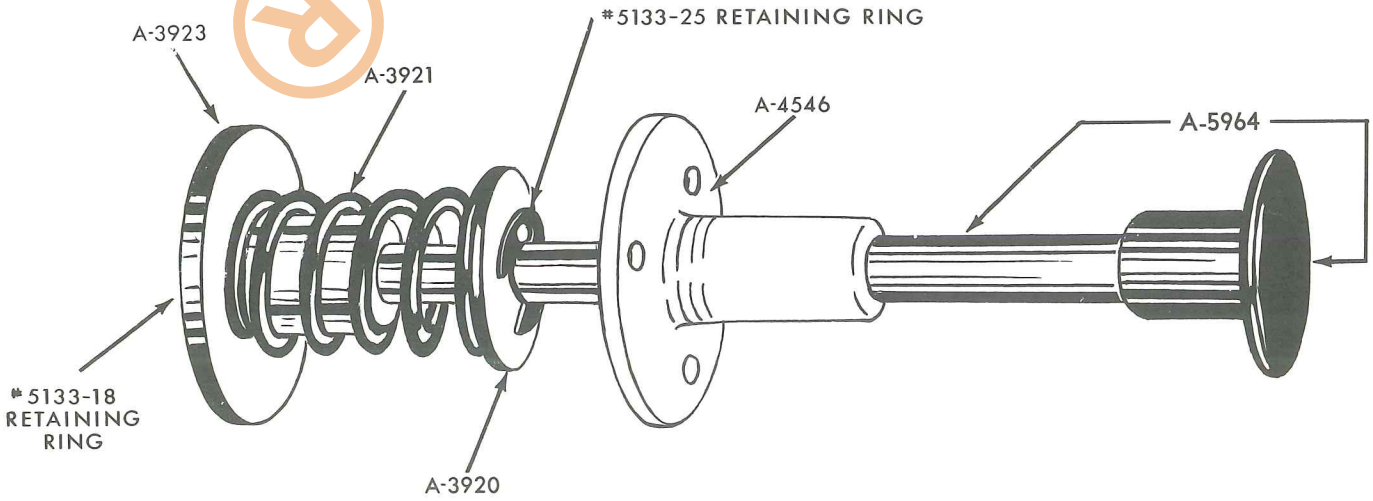

B-5959


COTTLIEB®

BALL ELEVATOR ASSEMBLY

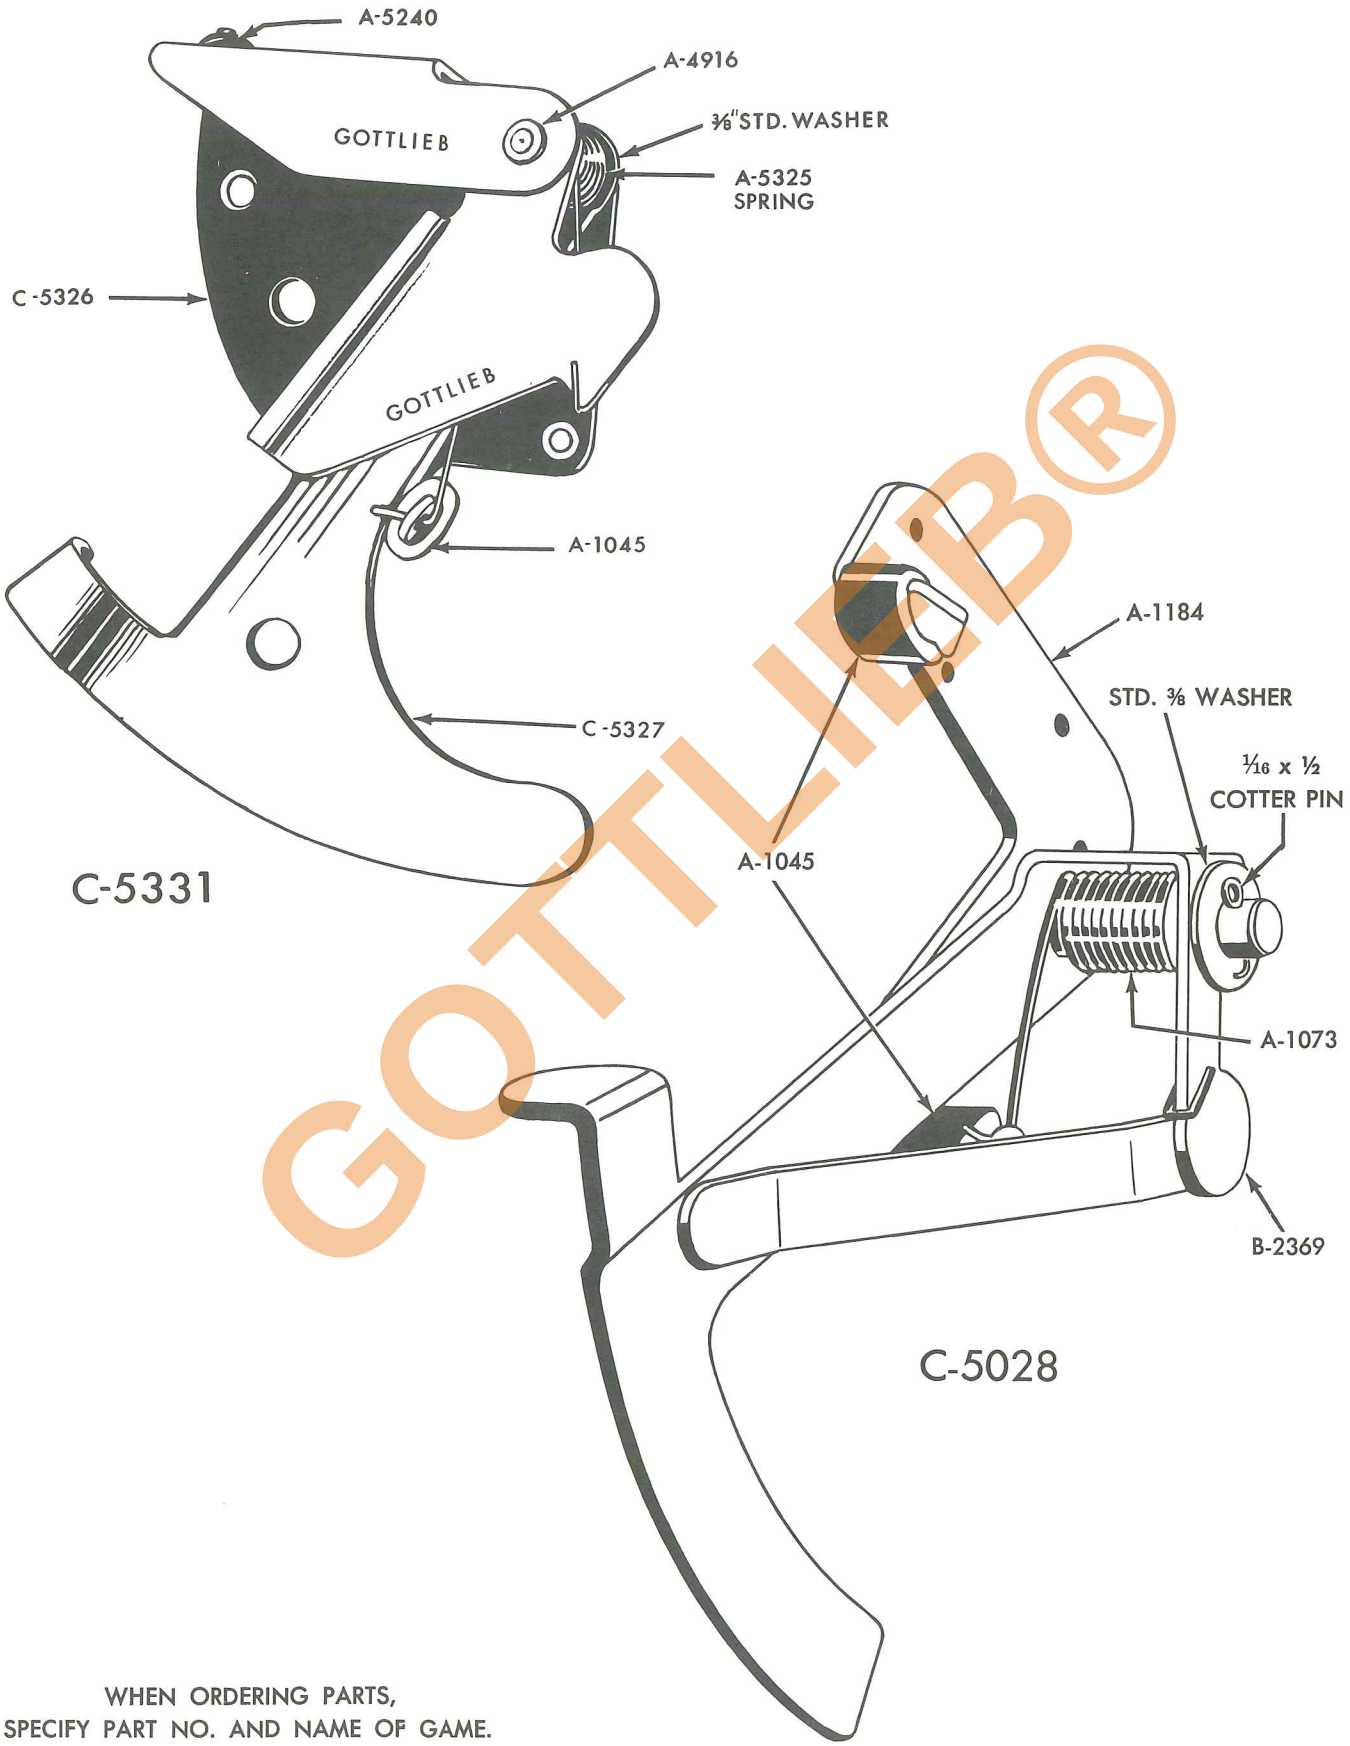


GOTTLIEB®


WHEN ORDERING PARTS,
SPECIFY PART NO. AND NAME OF GAME.

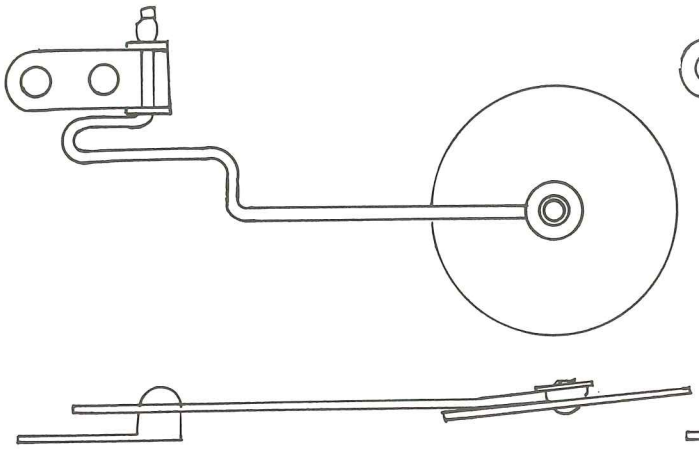

A-2544 HOLE FLAP

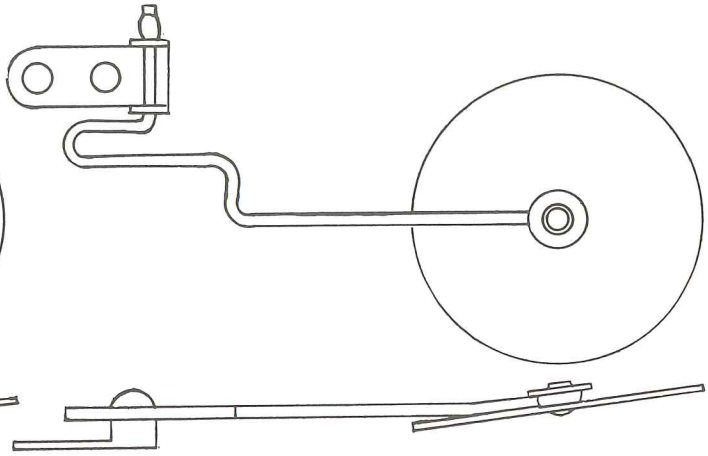


A-3425 HOLE FLAP

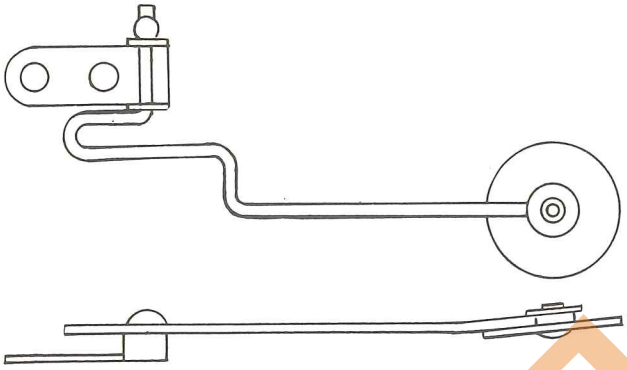

A-3210 HOLE FLAP

PLASTIC TARGET





A-2661

SLOTTED YOKE

(SPECIFY COLOR OF PLASTIC AND COLOR OF MARKING)

PART NUMBER	MARKING
A-3319	20
A-3320	30
A-3321	40
A-3322	50
A-3369	10
A-5201	PLAIN
A-5217	RD. WH. BL.
A-6435	O
A-6436	X
A-6829	STAR




A-2662


INSULATING YOKE

GOTTLIEB®

COIL SLEEVE


(SLIP IN CORE FOR COILS)

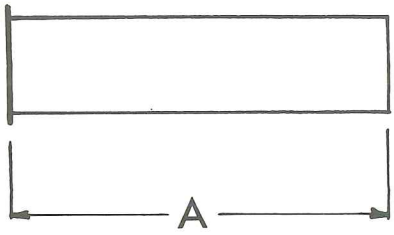

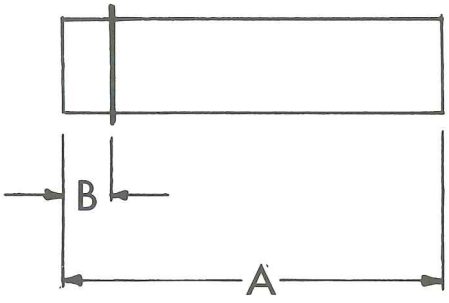

PART NUMBER	A	B
A-5064	$1\frac{21}{32}$	
A-5065	$1\frac{7}{8}$	
A-5142	$2\frac{3}{4}$	$\frac{1}{4}$
A-5171	$1\frac{19}{32}$	
A-5172	$2\frac{1}{2}$	
A-6087	$1\frac{31}{32}$	$\frac{1}{4}$

BALL GATE

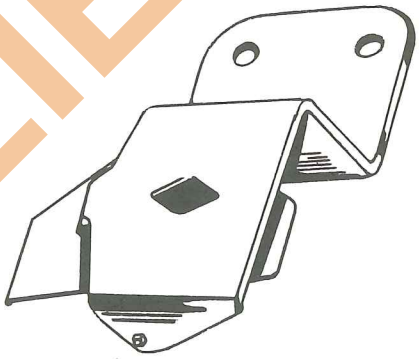


A-3290

MINI POST




A-5745

KICK SWITCH ROD



A-4547 - $1\frac{7}{8}$" LG.
A-4548 - $2\frac{1}{8}$" LG.
A-4549 - $2\frac{3}{8}$" LG.


COIL STOP



A-4862 WITH ALUMINUM NUT
A-4863 WITH STEEL NUT


GOTTLIEB®

TARGET SWITCH ASSEMBLY

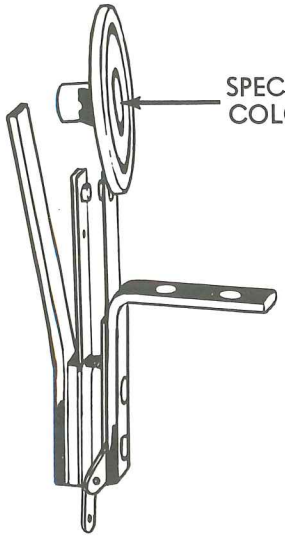


SWITCH PART NO. A-2007

RUBBER CONTACT SWITCH ASSEMBLY

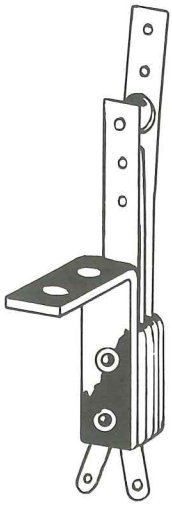


SWITCH PART NO. 36 QX
OR PART NO. 36 SX

RUBBER CONTACT FORMED SWITCH ASSEMBLY

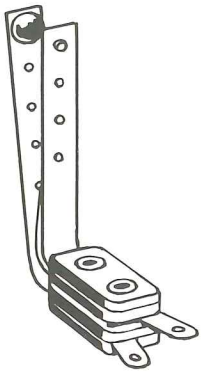


SWITCH PART NO. 232

FLIPPER BUTTON SWITCH ASSEMBLY

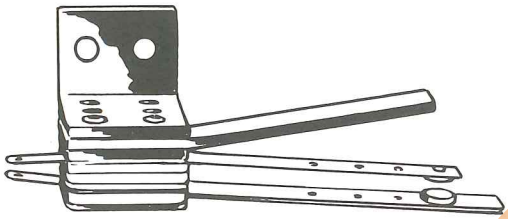


SWITCH PART NO. 55R

FLIPPER BUTTON SWITCH ASSEMBLY

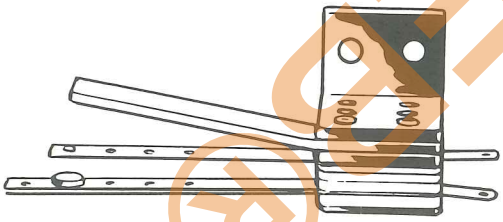


SWITCH PART NO. 55L

BUMPER CONTACT SWITCH ASSEMBLY

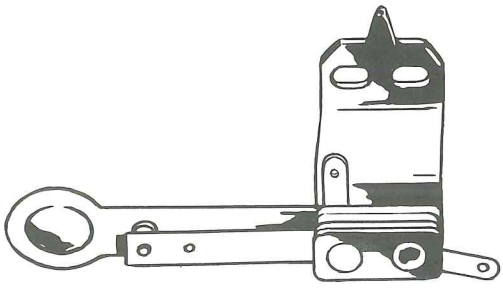

SWITCH PART NO. B


TARGET

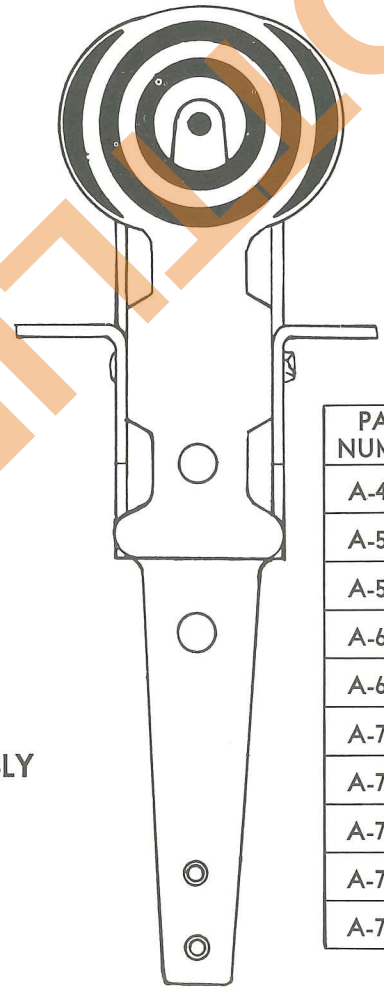


PART NUMBER	COLOR	PIN
A-4773	RED - WH. - BL.	SMALL
A-5777	WHITE RABBIT RED BACKGROUND	NO
A-5976	GREEN DUCK WH. BACKGROUND	NO
A-6580	BLACK 100 PTS. WH. BACKGROUND	NO
A-6694	SPLIT RED - WH.	NO
A-7027	SUN BURST RED & WHITE	NO
A-7083	BULLS EYE RED WH. BACKGROUND	NO
A-7085	BULLS EYE BLACK WH. BACKGROUND	NO
A-7087	BULLS EYE RED YELLOW BACKGROUND	NO
A-7107	RED - WH. - BL.	NO

GOTTLIEB®


SWITCH BLADE LIFTERS (SHOWN OVERSIZE)




A-1415
LIFTER



LENGTH	NYLON NO.	FIBRE NO.
1/16"		A-452
3/32"	A-5255	A-453
1/8"	A-5256	A-454
5/32"	A-5257	A-455
3/16"	A-5258	A-456
7/32"	A-5259	A-457
1/4"	A-5260	A-458
9/32"	A-5261	A-459
5/16"	A-5262	A-460
11/32"	A-5263	A-461
13/32"	A-5264	A-462




A-1672
LIFTER




A-471
INSULATOR


SPECIFY LENGTH




A-1983
LIFTER



A-477




A-2660
SWITCH BLADE INSULATOR

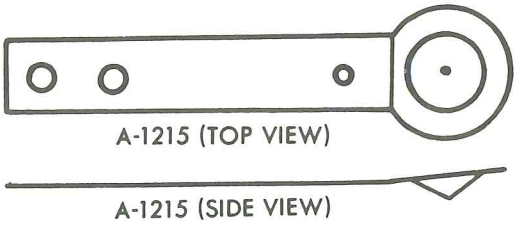

A-1215 (TOP VIEW)

A-1215 (SIDE VIEW)


BUMPER SWITCH BLADE

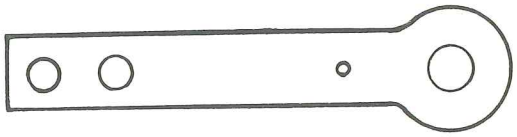


A-1620
TARGET SWITCH BLADE




A-2064
ROLLOVER BUTTON SWITCH BLADE

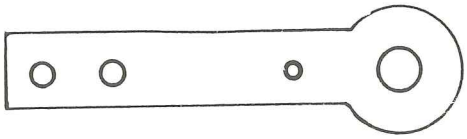

A-2834
TARGET SWITCH BLADE

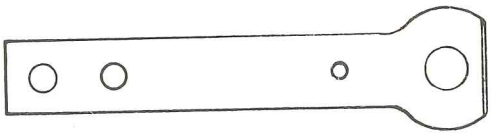


A-3058
TARGET SWITCH BLADE

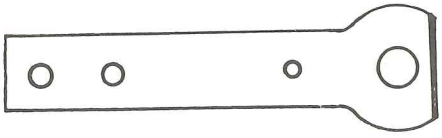


A-3667
TARGET SWITCH BLADE


GOTTLIEB®

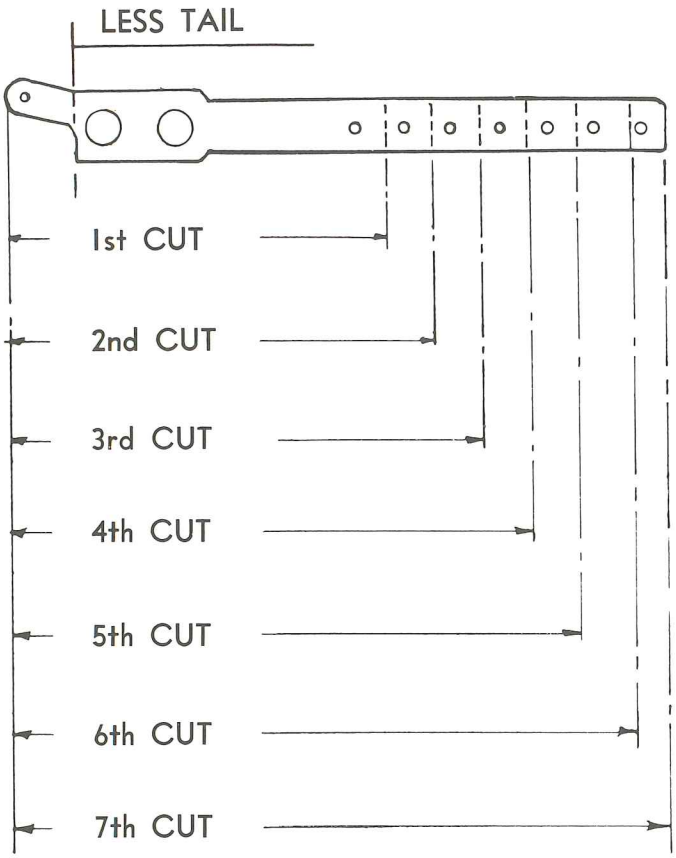


SWITCH COVER PLATE



A-4981




A-4811




1/16"
SEPARATOR
A-463



1/32"
SEPARATOR
A-464




1/32"
STEEL
A-465



1/16"
STEEL
A-1826

		1ST CUT	2ND CUT	3RD CUT	4TH CUT	5TH CUT	6TH CUT	7TH CUT
.008"	STANDARD	A-391	A-396	A-401	A-406	A-411	A-2314	A-416
	LESS TAIL	A-421	A-426	A-431	A-436	A-441	A-2319	A-446
.010"	STANDARD	A-392	A-397	A-402	A-407	A-412	A-2315	A-417
	LESS TAIL	A-422	A-427	A-432	A-437	A-442	A-2320	A-447
.012"	STANDARD	A-393	A-398	A-403	A-408	A-413	A-2316	A-418
	LESS TAIL	A-423	A-428	A-433	A-438	A-443	A-2321	A-448
.016"	STANDARD	A-394	A-399	A-404	A-409	A-414	A-2317	A-419
	LESS TAIL	A-424	A-429	A-434	A-439	A-444	A-2322	A-449
.020"	STANDARD	A-395	A-400	A-405	A-410	A-415	A-2318	A-420
	LESS TAIL	A-425	A-430	A-435	A-440	A-445	A-2323	A-450



SIDE LUG

A-451



SIDE LUG


A-2610



A-1698
BACKING BLADE




A-2463




A-1195
BACKING BLADE

GOTTLIEB


FORMED SWITCH BLADES




A-127




A-154




A-1968



A-1969




A-786




A-2357



A-2428



A-918



A-3309



A-1853



A-3421




A-1965




A-5634


ROLLOVER WIRE FORMS




A-6785




A-6784




A-7307

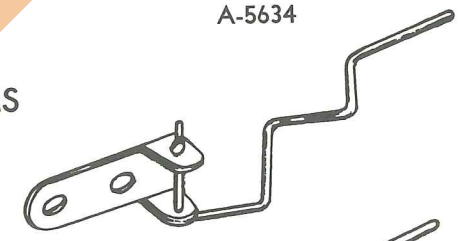


A-1453



A-1454

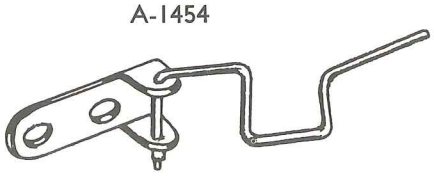


A-1455




A-1456

GOTTLIEB®


ROLLOVER WIRE FORMS

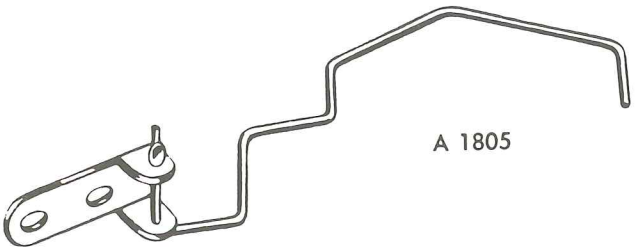


A 1805

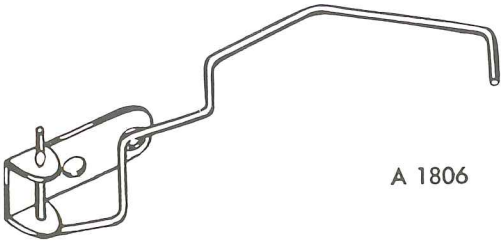


A 1806

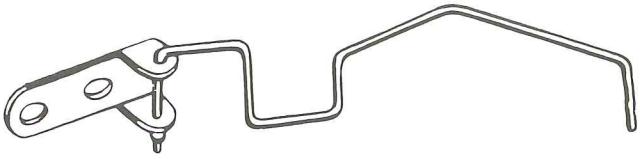

A 1807

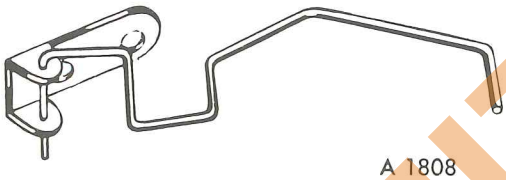


A 1808

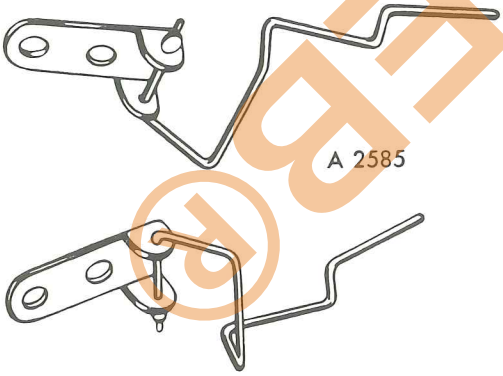


A 2585


A 2586

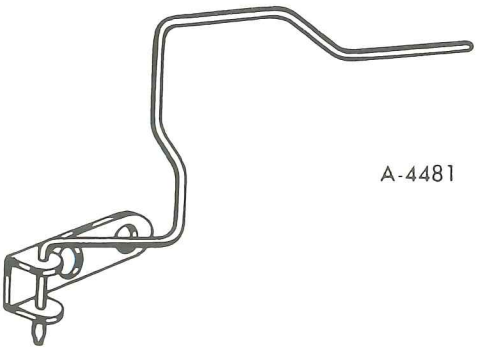


A-4481

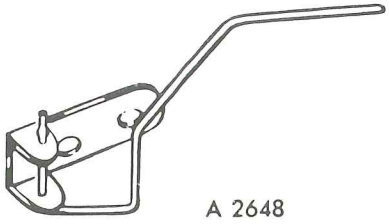


A 2648

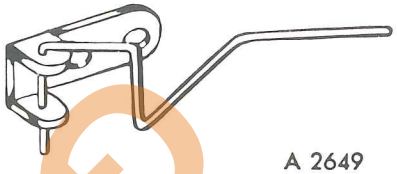


A 2649

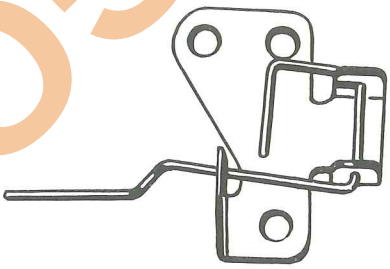


A-4958

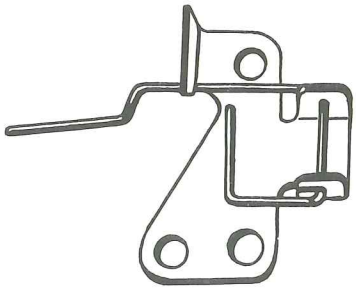

A-4959

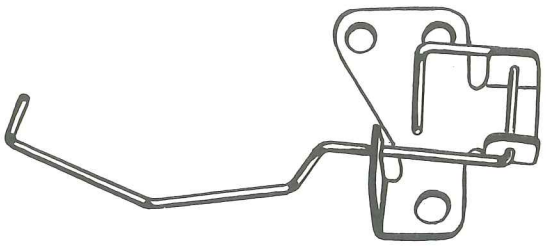


A-4960

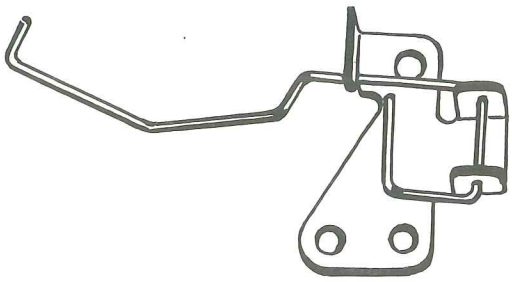


A-4961

GOTTLIEB®


SLUG REJECTOR CHUTE PARTS

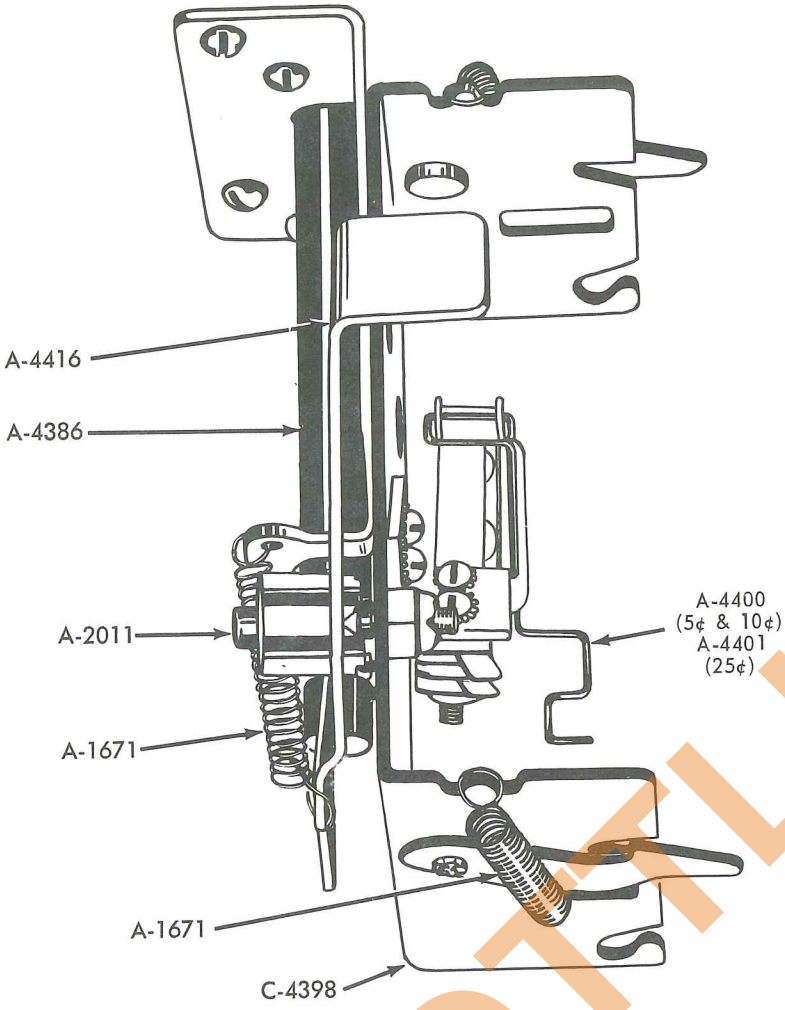

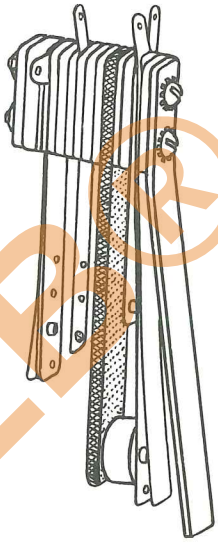

A-392


VIBRATION DAMPER

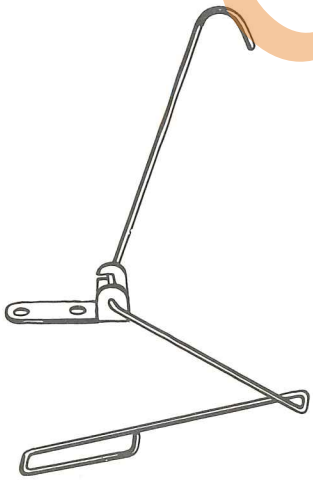

A-5341

FOREIGN COIN ENTRANCE PLATES & SLUG REJECTOR CHUTE PARTS AVAILABLE ON REQUEST. SPECIFY COUNTRY NAME, NAME AND DENOMINATION OF COIN.

VIBRATION DAMPER & SWITCH

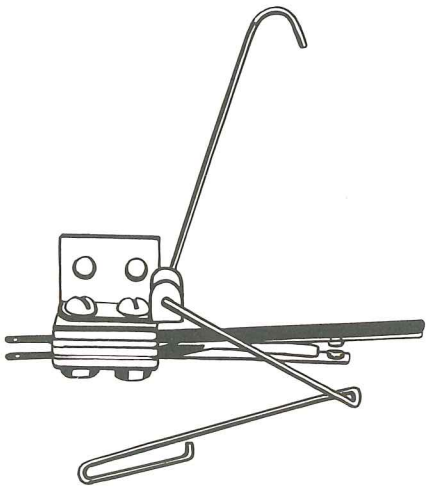

A-5362

GOTTLIEB®

SLUG REJECTOR CHUTE PARTS

COIN FEED TROUGH COVER


B-4392 FOR SS, SL & SL2 CABINETS

B-4460 FOR 100 LIRE & 50 FRANC MAROC

B-7448 FOR SS3 CABINET

B-7587 FOR 25¢ CHUTE FOR SS, SL & SL2 CABINETS

B-7588 FOR 25¢ CHUTE FOR SS3 CABINETS

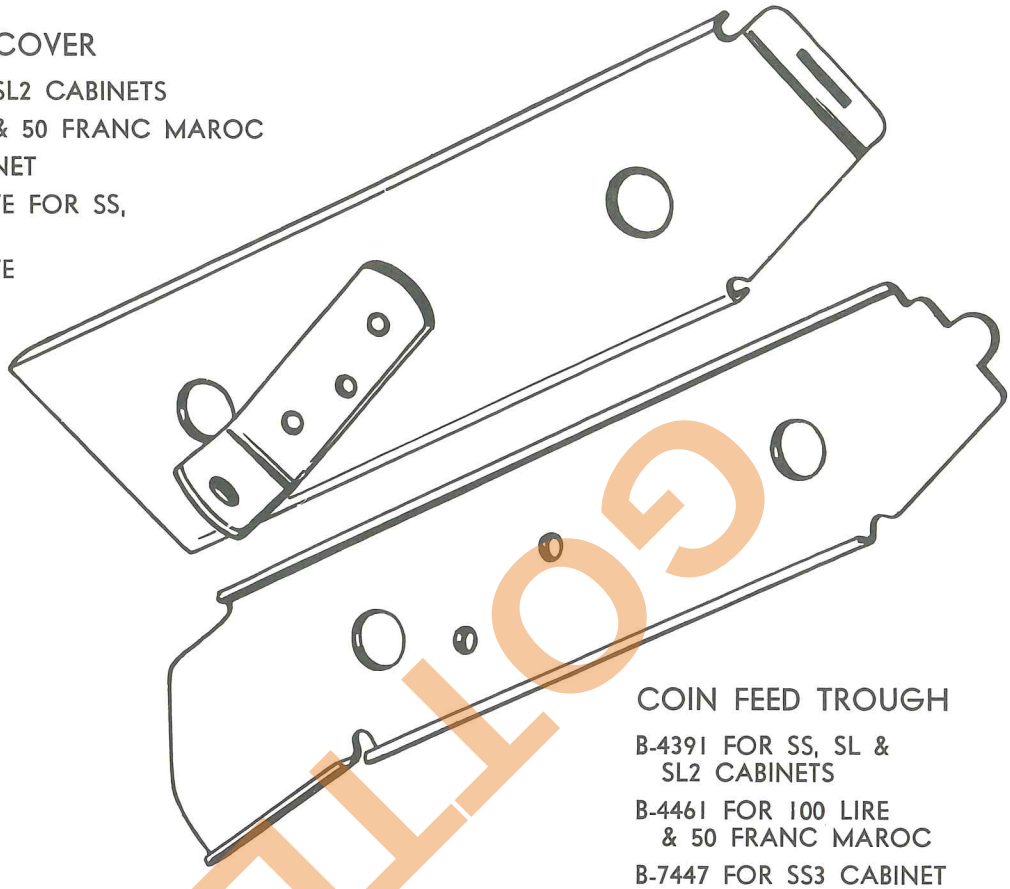


COIN FEED TROUGH

B-4391 FOR SS, SL & SL2 CABINETS

B-4461 FOR 100 LIRE & 50 FRANC MAROC

B-7447 FOR SS3 CABINET


COIN ENTRANCE PLATE



GOTTLIEB®

PART NUMBER	PLATE MARKING	COIN DENOMINATION	PART NUMBER	PLATE MARKING	COIN DENOMINATION
A-2592	2 x 1 Fr.	2 x 1 FRANC	A-6288	25 Ore	25 ORE
A-6050	5¢	5 CENTS	A-6289	50 Ore	50 ORE
A-6051	10¢	10 CENTS	A-6290	1 Kr.	1 KRONE
A-6052	25¢	25 CENTS	A-6334	1 Fr.	1 FRANC
A-6280	20 Frs.	20 FRANC	A-6337	6d	6 PENCE
A-6281	50 Frs.	50 FRANC	A-6548	25 Ore	25 ORE
A-6282	3d	3 PENCE	A-6764	L. 50	50 LIRE
A-6285	10 Pfg.	10 PFENNING	A-6765	L. 100	100 LIRE
A-6286	20 ct.	20 CENTIMES	A-6825	50 Pfg.	50 PFENNING
A-6287	50 ct.	50 CENTIMES	A-7439	2 x 10 Pfg.	2 x 10 PFENNING


COIN ENTRANCE PLATE



PART NUMBER	PLATE MARKING		COIN DENOMINATION	
	1st SLOT	2nd SLOT	1st SLOT	2nd SLOT
C-7200	5¢		5 CENTS	
C-7202	10¢		10 CENTS	
C-7204	5¢	25¢	5 CENTS	25 CENTS
C-7206	10¢	25¢	10 CENTS	25 CENTS
C-7401	1 Fr.		1 FRANC	
C-7402	20 Frs.		20 FRANC	
C-7403	10 PFG.		10 PFENNING	
C-7404	50 ct.		50 CENTIMES	
C-7405	25 Ore	1 Kr.	25 ORE	1 KRONE
C-7406	50 Ore	1 Kr.	50 ORE	1 KRONE
C-7438	10 PFG.	50 PFG.	10 PFENNING	50 PFENNING
C-7440	2 x 10 PFG.	50 PFG.	10 PFENNING	50 PFENNING
C-7529	3d		3 PENCE	
C-7530	6d		6 PENCE	
C-7532			DIANA (0.10)	
C-7533	25 Ore		25 ORE	
C-7534	1 Dr.		1 DRACHMA	
C-7536	L. 50		50 LIRE	
C-7538	L. 50	L. 100	50 LIRE	100 LIRE
C-7539	20 ct.		20 CENTIMES	
C-7540	25 Ore		25 ORE	
C-7541	50 Ore		50 ORE	
C-7543	25 Ore	1 Kr.	25 ORE	1 KRONE
C-7544	25¢		25 CENTAMOS	
C-7545	25¢	1 Bs	25 CENTAMOS	1 BOLIVAR
C-7547	¥ 20	¥ 50	10 YEN	50 YEN
C-7560	2 x 1 Fr.		1 FRANC	
C-7574	20 ct.	50 ct.	20 CENTIMES	50 CENTIMES
C-7575	50 ct.	1 Fr.	50 CENTIMES	1 FRANC
C-7621			½ SOL DE ORO	
C-7634	20 P	50 P	20 PENNIA	50 PENNIA
C-7718			20 MILS	50 MILS
C-7733	¥ 20		10 YEN	
C-7734	1 Pta.		1 PESETA	
C-7754	2 x 10 PFG.		10 PFENNING	
C-7756			10 CENTS	10 CENTS


GOTTLIEB®

METAL DOOR FOR CABINET

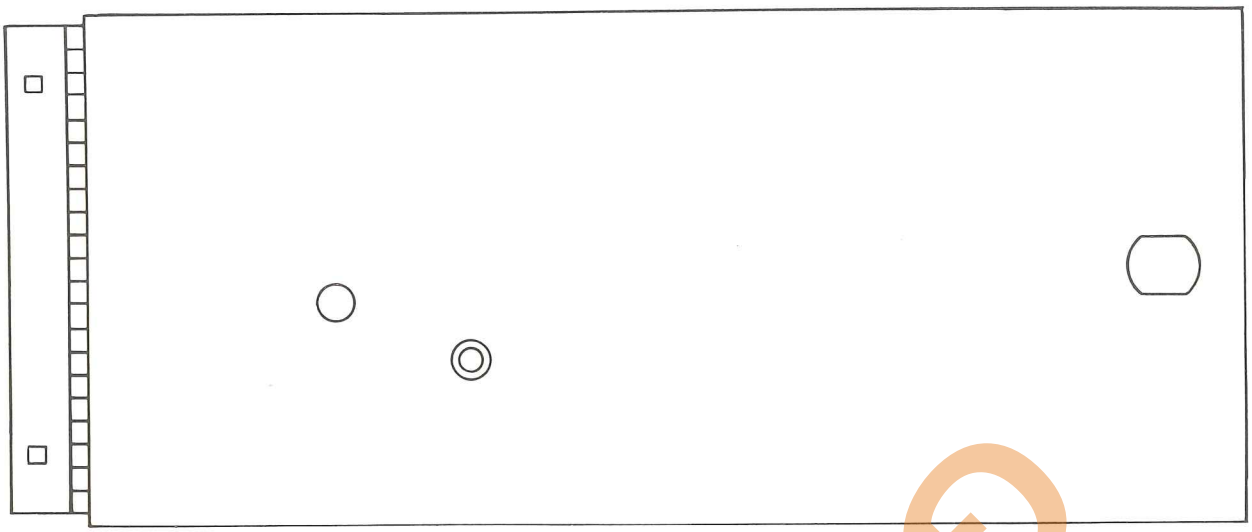


C-4537 SINGLE CHUTE
C-4538 DOUBLE CHUTE SPACED 4½" APART
C-4539 DOUBLE CHUTE SPACED 7⅝" APART
C-4540 SINGLE CHUTE NO BUTTON

TRIM RING FOR METAL FRONT DOOR

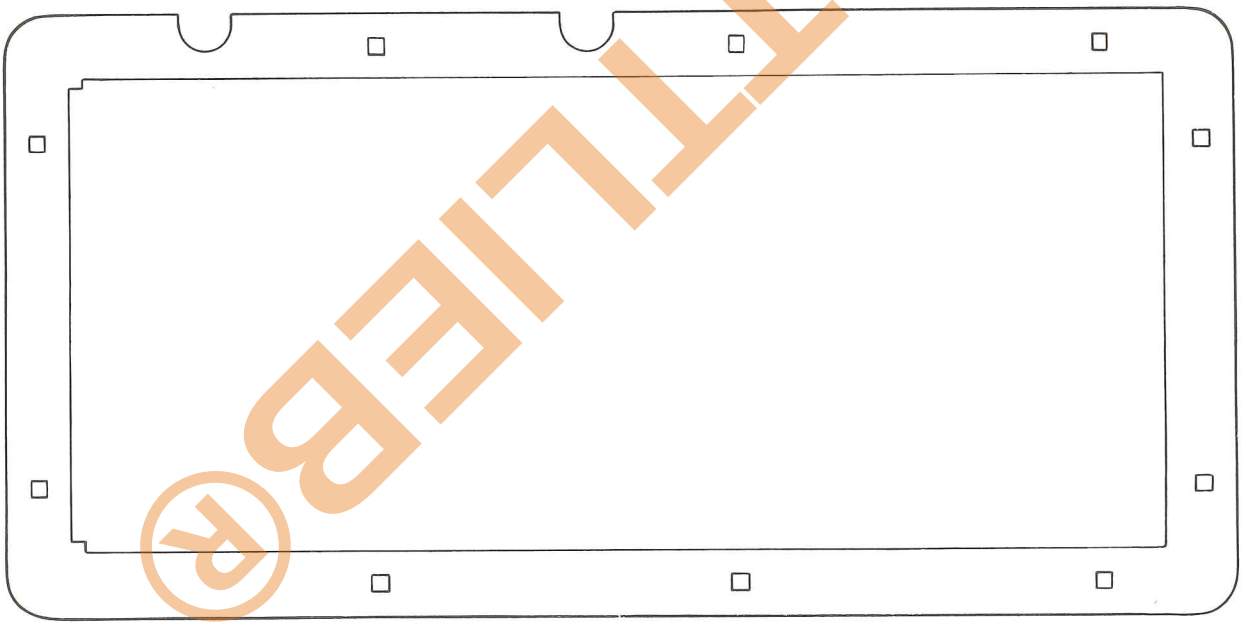


C-4528 TO MATCH CHUTES SPACED 4½" APART
C-4529 TO MATCH CHUTES SPACED 7⅝" APART
C-5954 TO MATCH SINGLE CHUTE

ARCH HOLE LINER

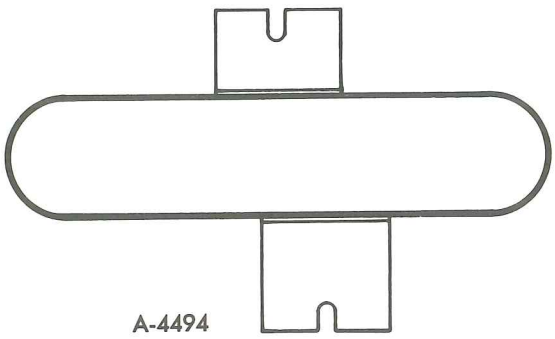

A-4494


METAL DOOR PUSH BUTTON



A-4524


GOTTLIEB®

METAL DOOR TRIM
RING MOUNTING STRIP

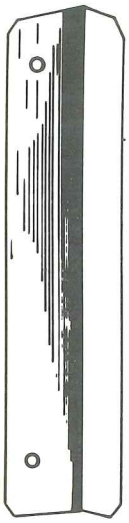


A-4526

METAL DOOR
DOOR STOP




A-4525

LATCH LEVER STOP

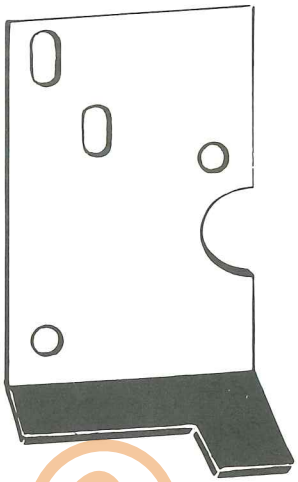


A-5231

FRONT MOULDING
LATCH LEVER

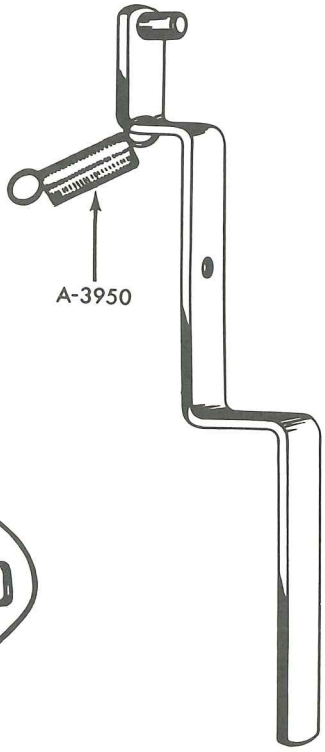


A-3950

COIN RETURN TROUGH

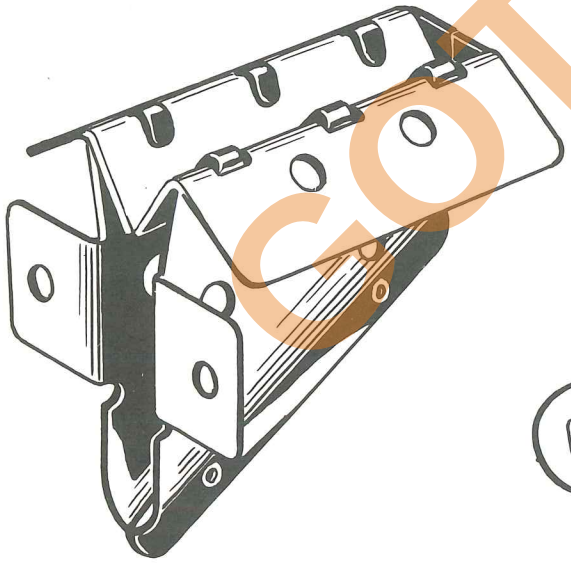

A-4417

COIN RETURN
TURNAROUND

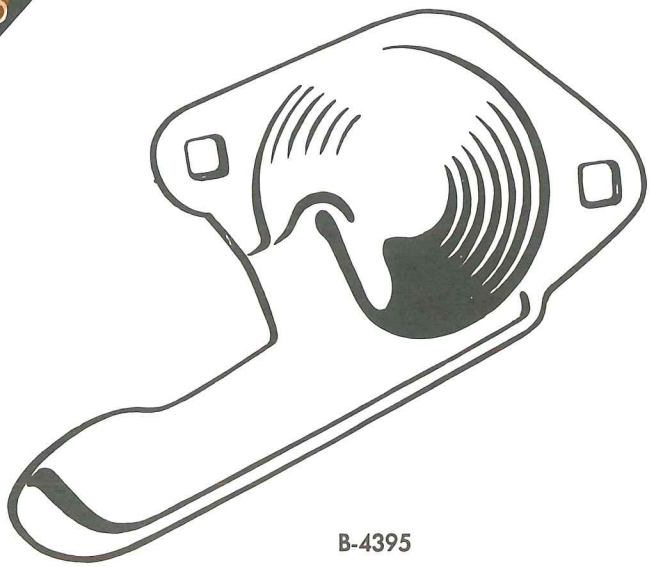


B-4395

A-4670


COTTLIEB®

LIGHT BOX INSERT HINGE PIN



A-4759

LIGHT BOX INSERT HINGE PIVOT




A-4758

BANANA CUT LINER




C-4564

ARCH STICK PROTECTOR

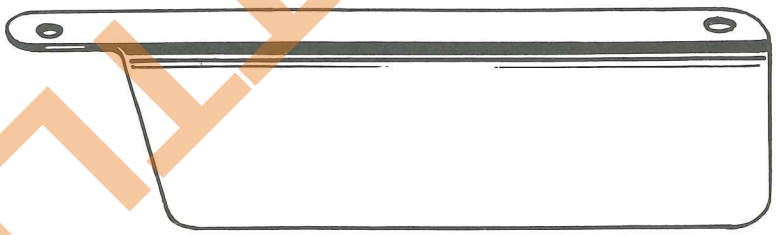


A-4664

CIGARETTE HOLDER

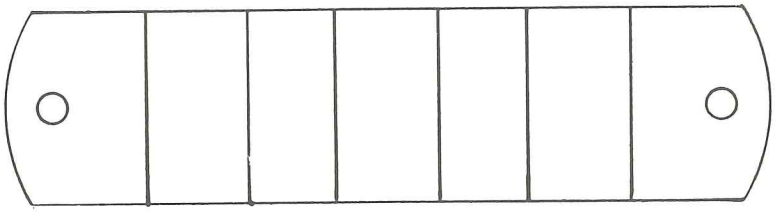

A-3889

METAL FLIPPER BUTTON



A-3562 (1 3/16" LONG)
A-6092 (1 9/16" LONG)


RETAINING CLIP



A-3811


GOTTLIEB®

TILT BOB WIRE ASSEMBLY

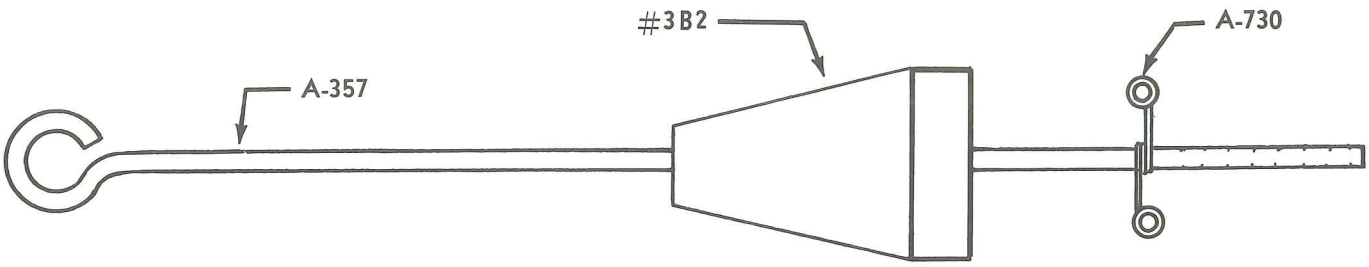


A-4802

BALL ROLL TILT

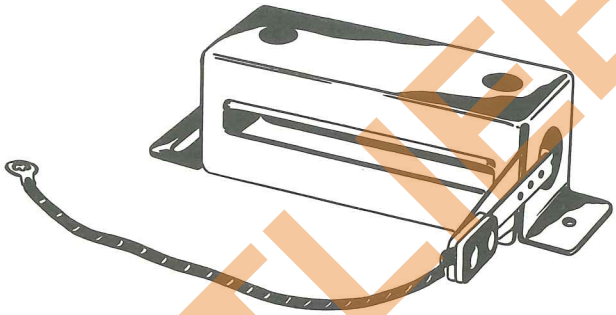


A-5309

MERCURY TILT SWITCH

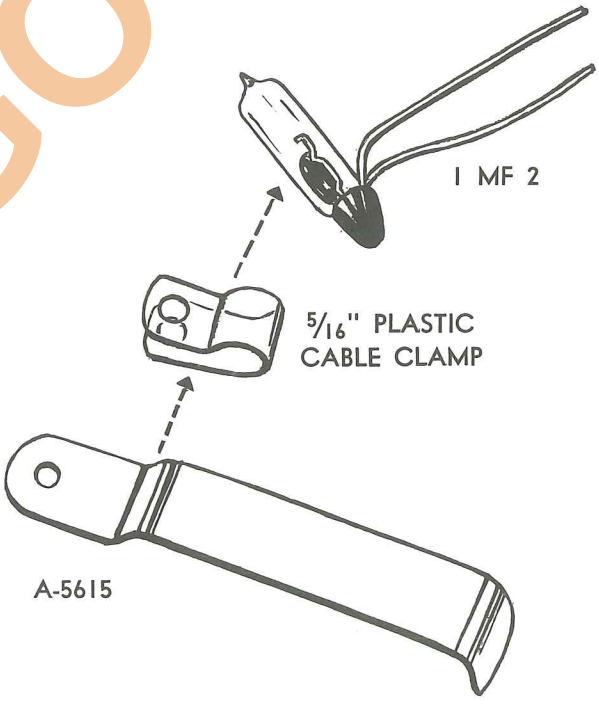

GOTTLIEB®

MODEL "SL" CORNER TRIM

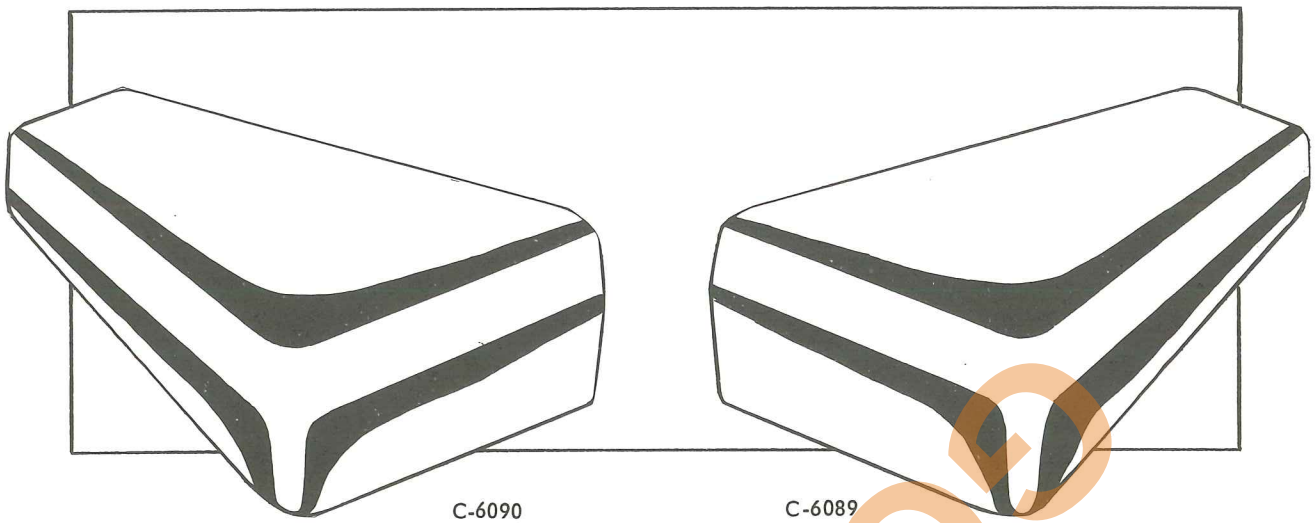


C-6090 C-6089

MOULDING LOCK ADJUSTMENT NUT



A-6099

MOULDING LOCK PLATE

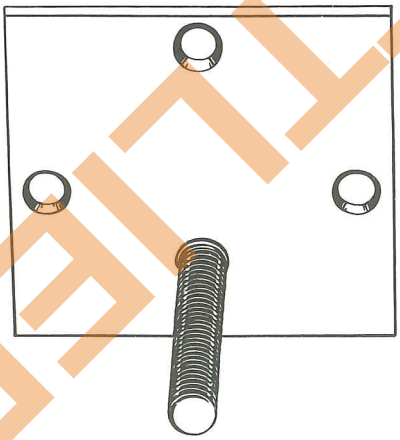


A-6102

5/16-18 LOCK NUT



#42E-058


"SL" MOULDING LOCK

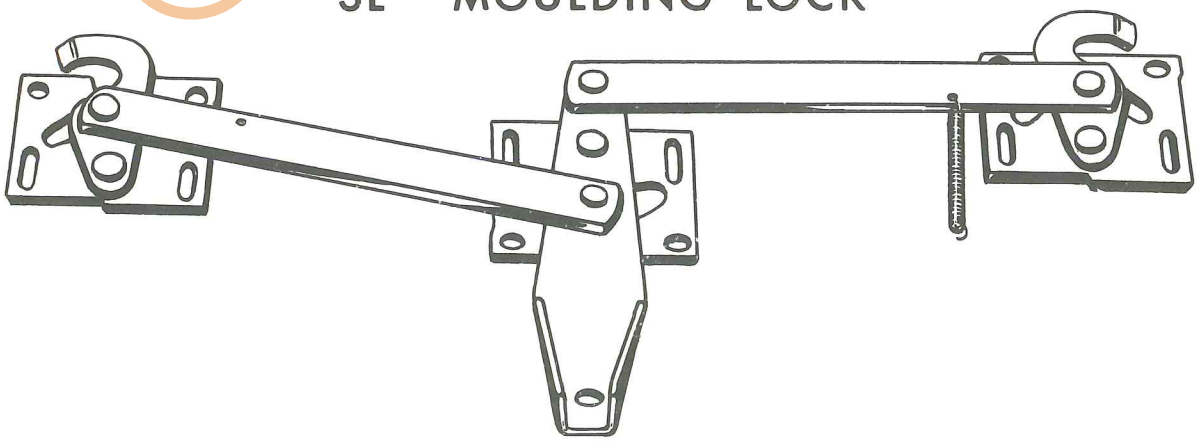

C-6104


COTTLE®

FRONT DOOR

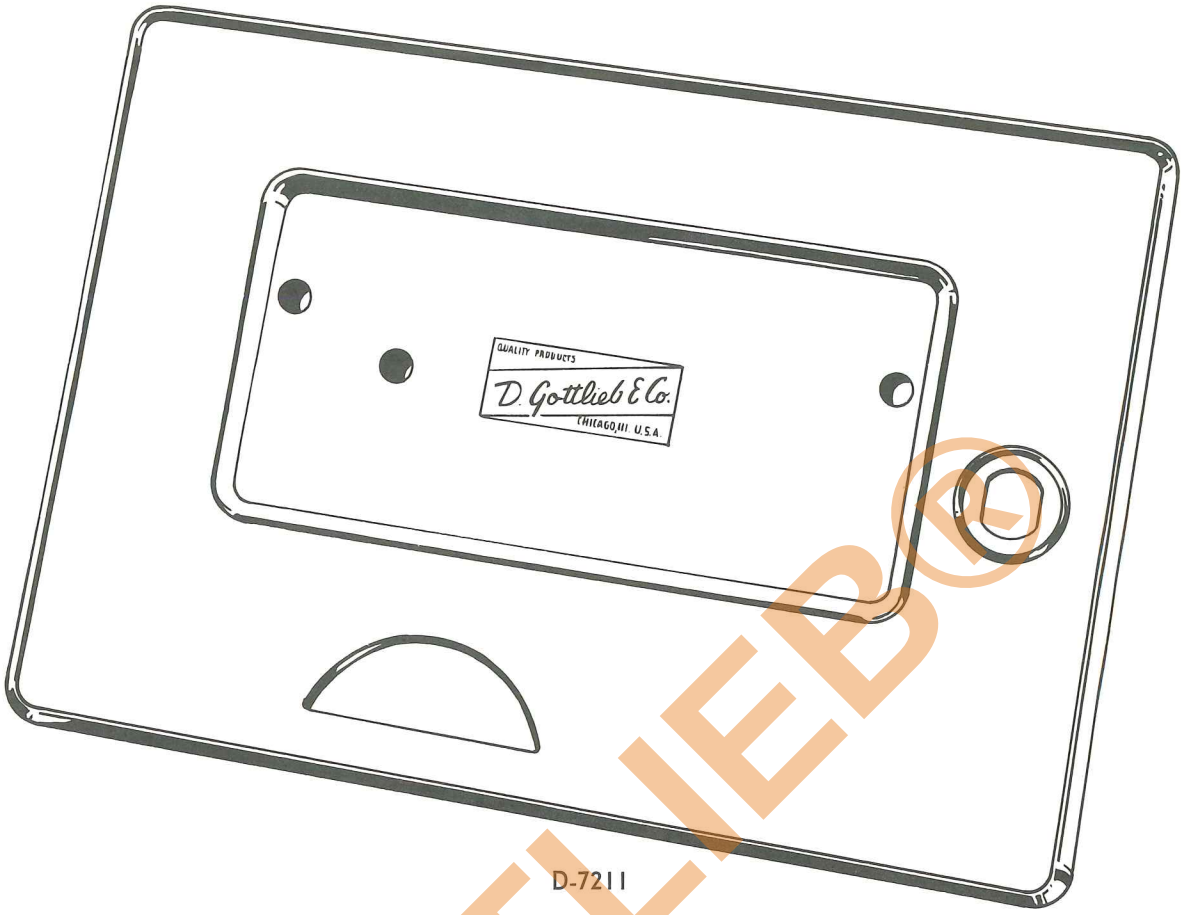


D-7211

COIN RETURN HOUSING

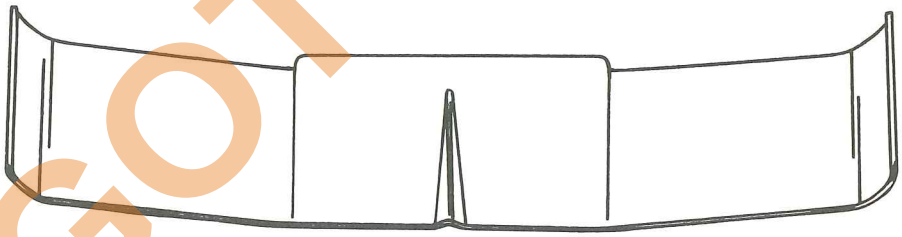

B-7193

COIN RETURN COVER

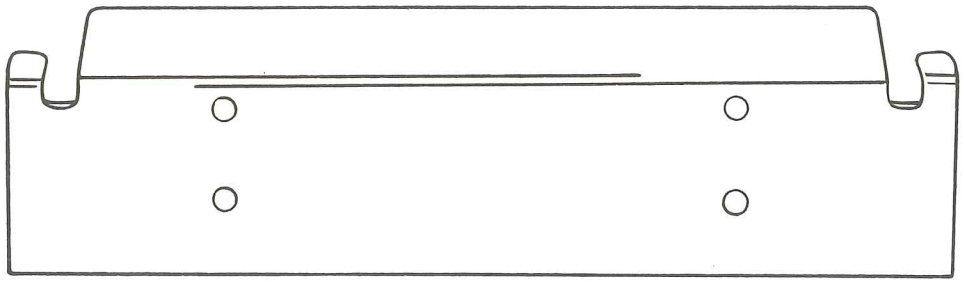


B-7194

GOTTLIEB®

FRONT DOOR PARTS

HINGE

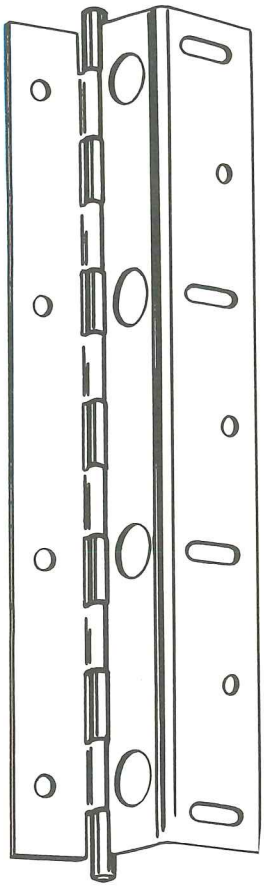

A-7196

HINGE NUT STRIP




A-7181

FRONT DOOR HOLE PLUG




A-7478

COIN RETURN BAFFLE PLATE



A-7495

COIN GUIDE TROUGH

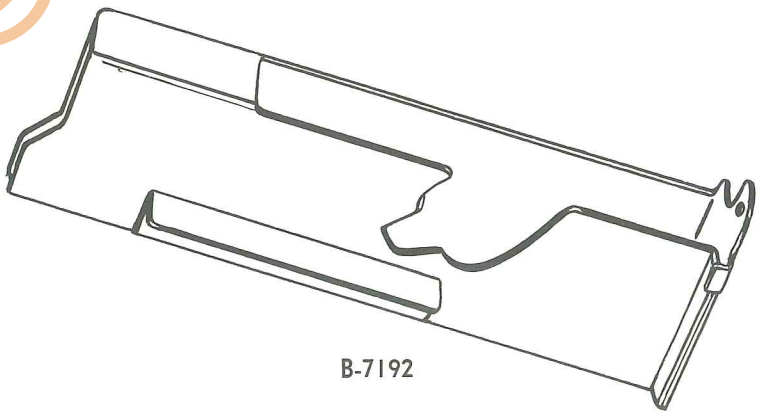


B-7192

GOTTLIEB®


FRONT DOOR PARTS

LOCK CAMS




A-7584

FOR "DUO" TYPE
LOCK WITH 90° STOP



A-7189



A-7188


FOR ACE TYPE
LOCK WITH 90° STOP

LOCK BOLT



A-7186

LOCK BOLT GUIDE



A-7187


LOCK STRIKE PLATE




A-7185

GOTTLIEB®

PLAYBOARD AUTO CLAMPS

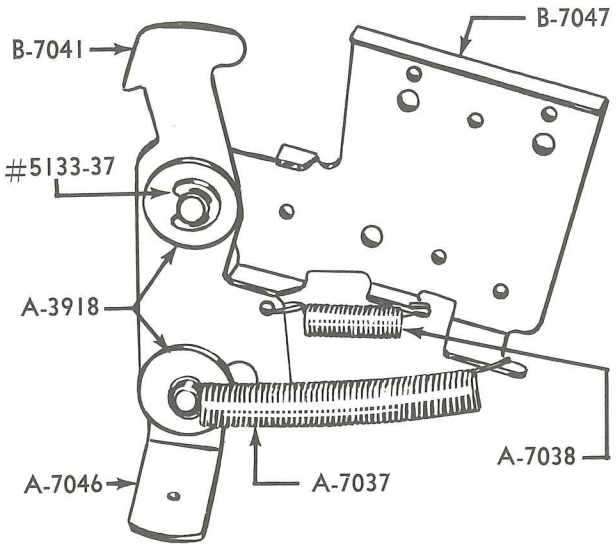

C-7589

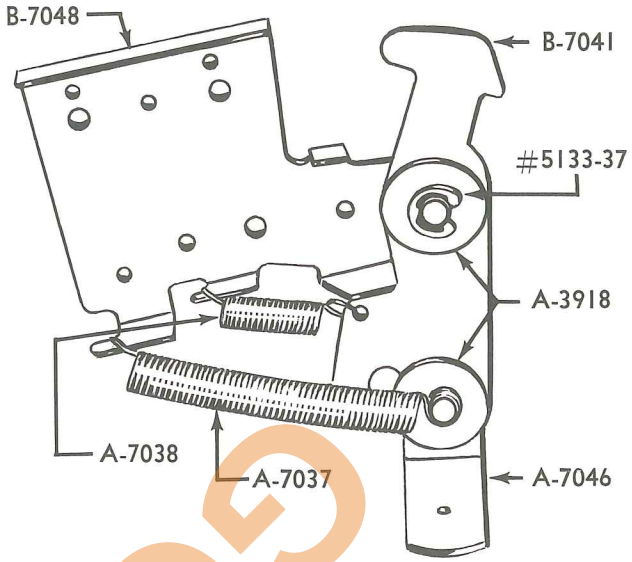


C-7590




B-7043

PLAYBOARD AUTO CLAMP LOCK STRIKE BRACKETS




B-7040



B-7039


PLAYBOARD SUPPORT

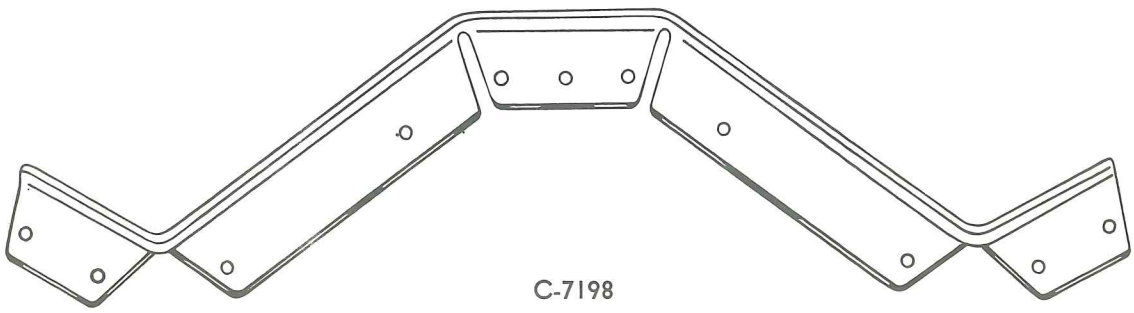

C-7198

GOTTLIEB®

"SS3" LOCKDOWN MOULDING

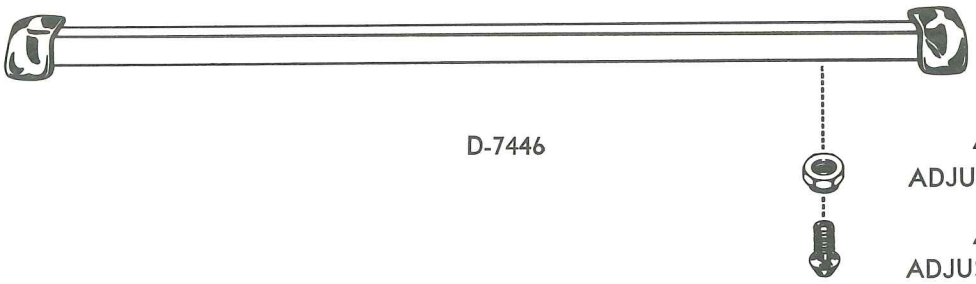


D-7446

A-7407
ADJUSTMENT NUT


A-7408
ADJUSTMENT SCREW

"SS3" LOCKDOWN MOULDING SLIDE

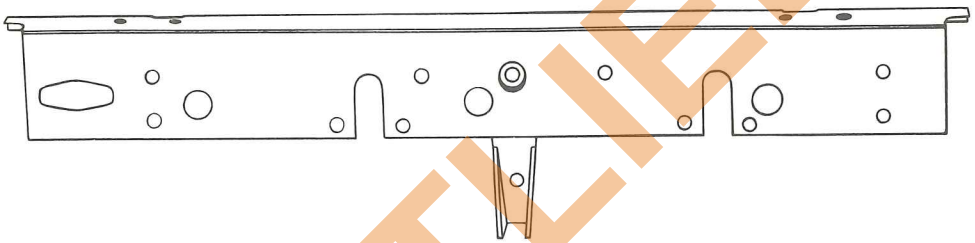

A-7445


MOTOR CAM

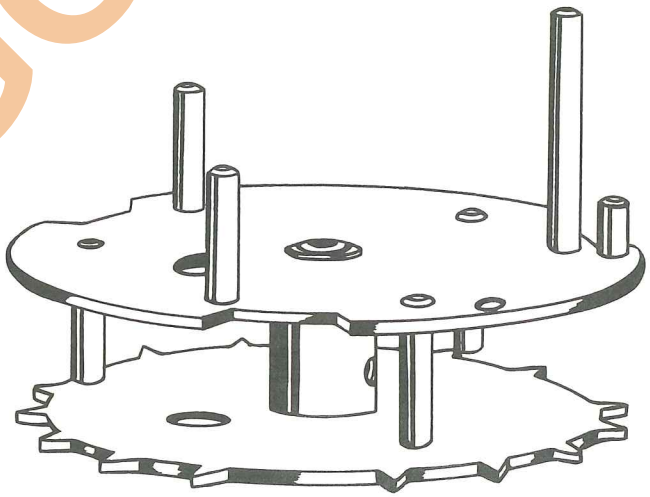

A-7492

GOTTLIEB®


3'' BELL ASSEMBLY

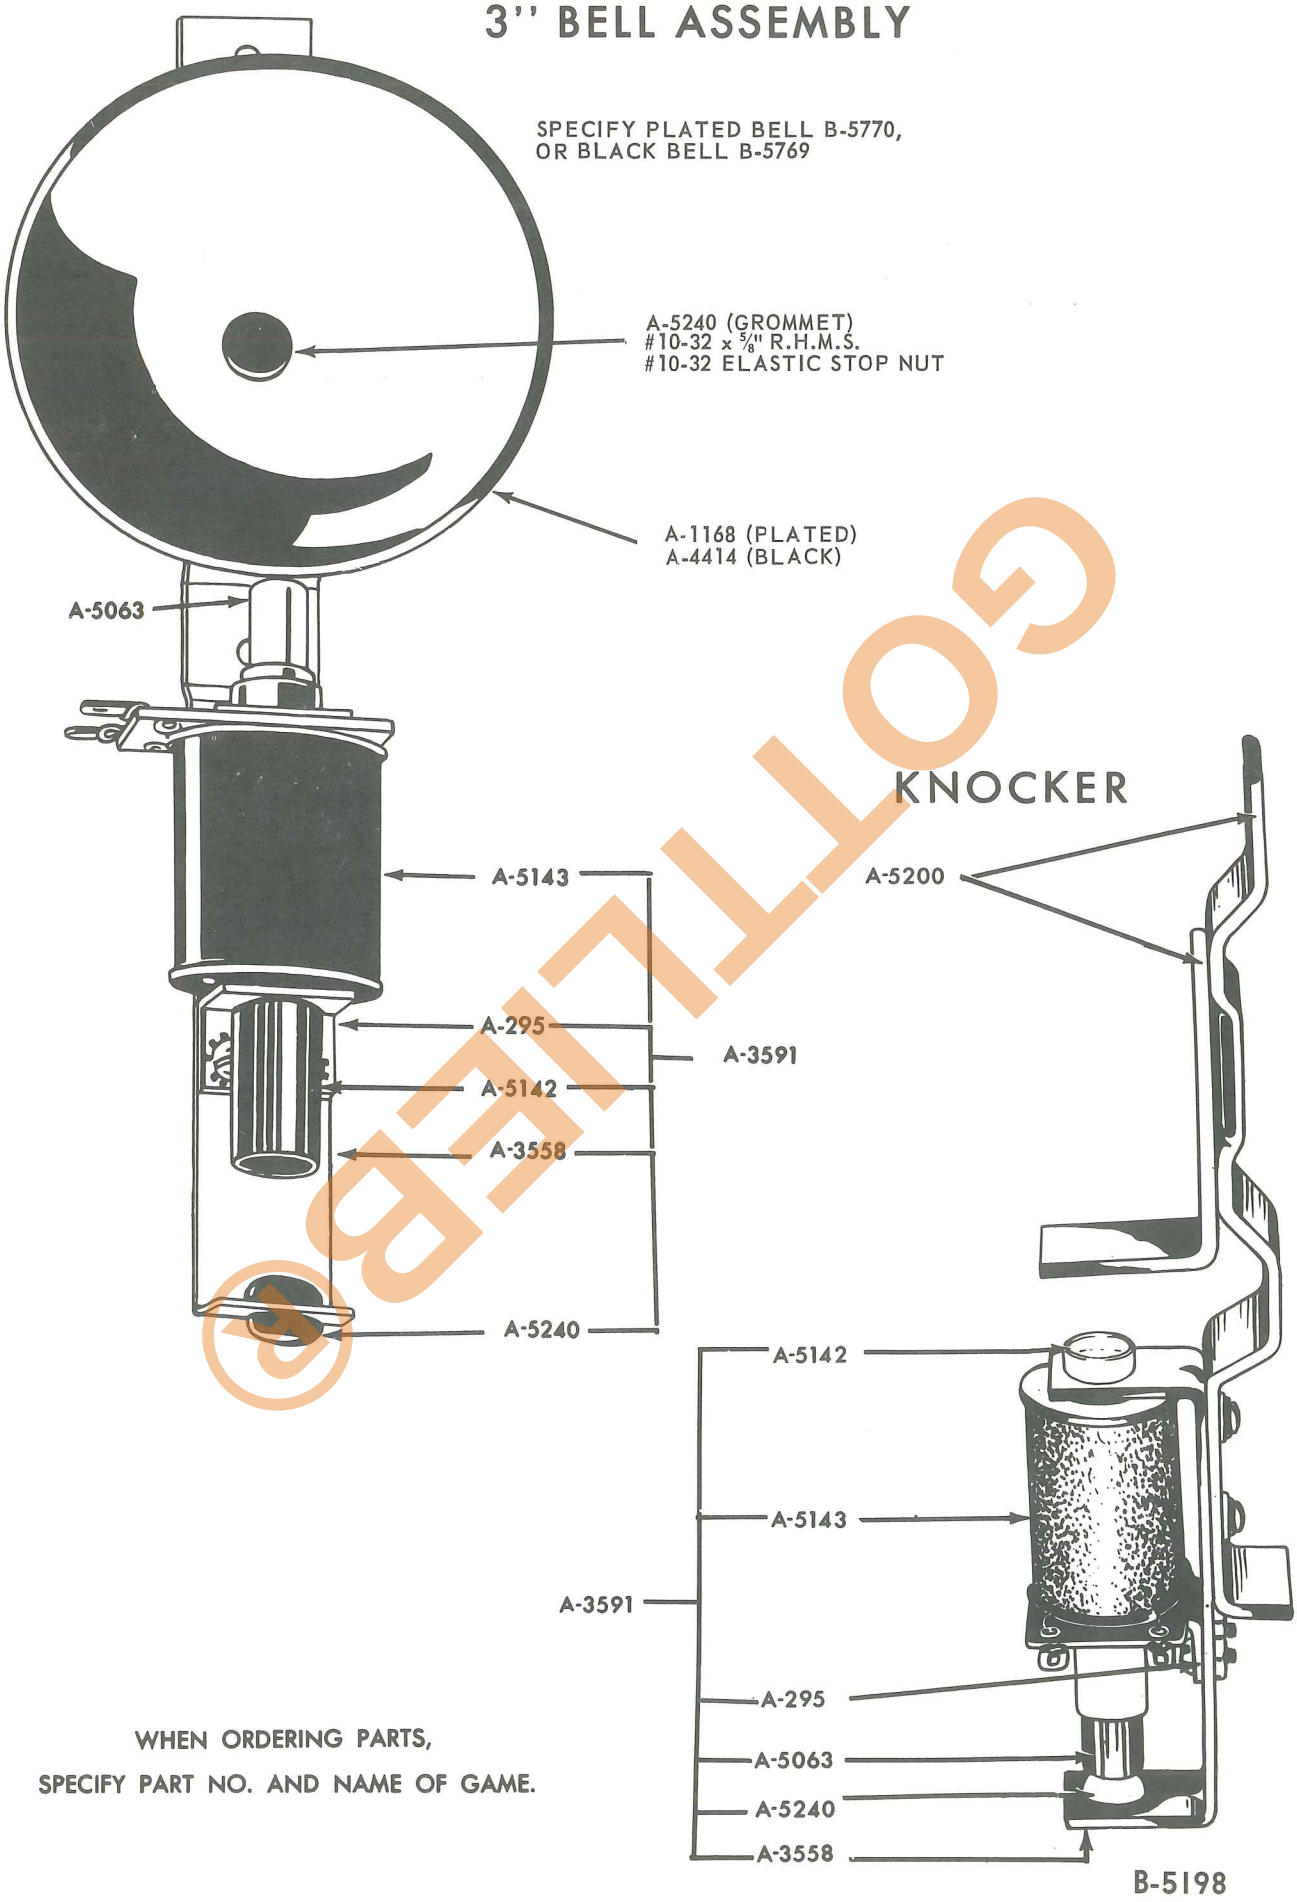


WHEN ORDERING PARTS,
SPECIFY PART NO. AND NAME OF GAME.

GOTTLIEB®


METAL SCORE CARD HOLDERS

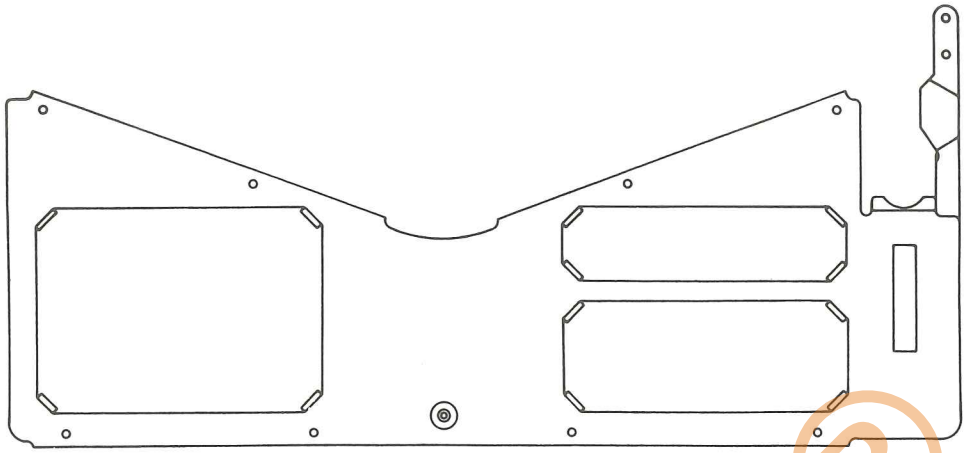

D-4766

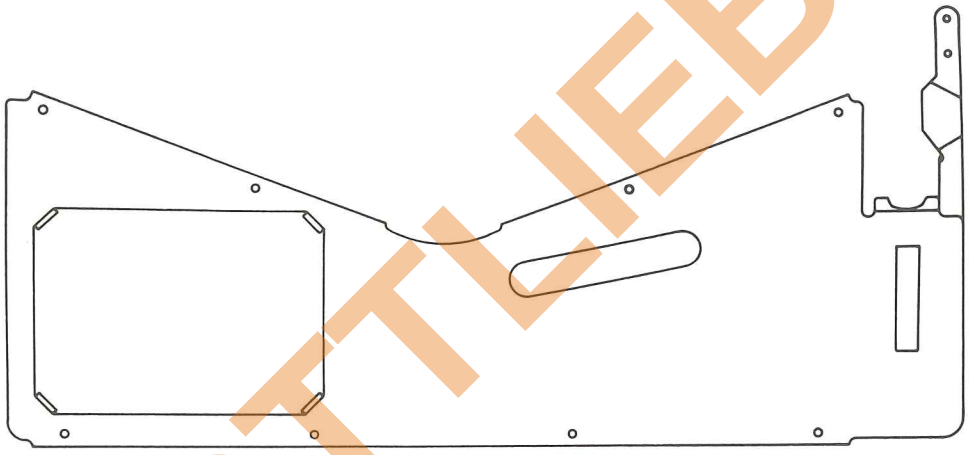


D-4769

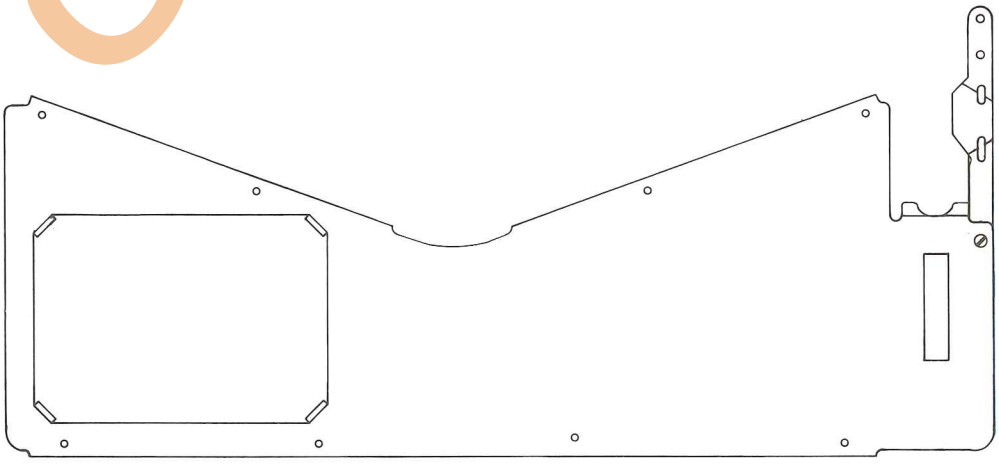


D-5904

GOTTLIEB®


METAL SCORE CARD HOLDERS

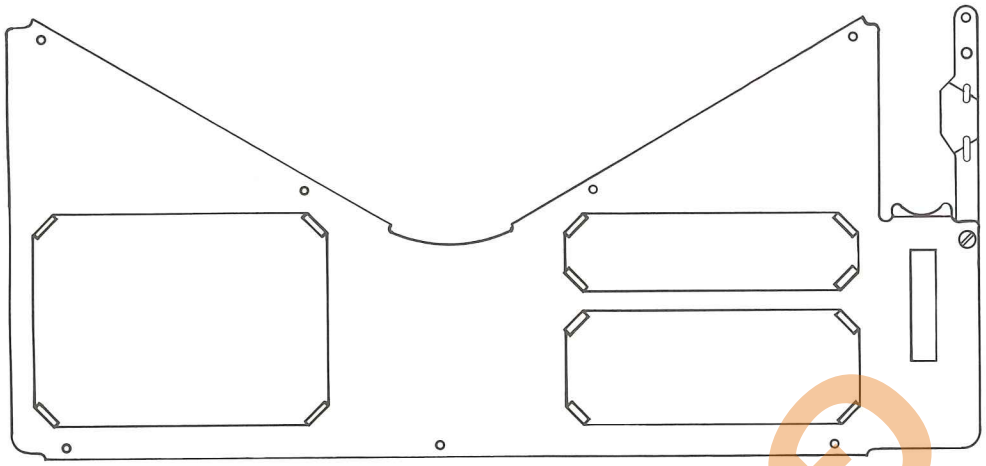

D-6189

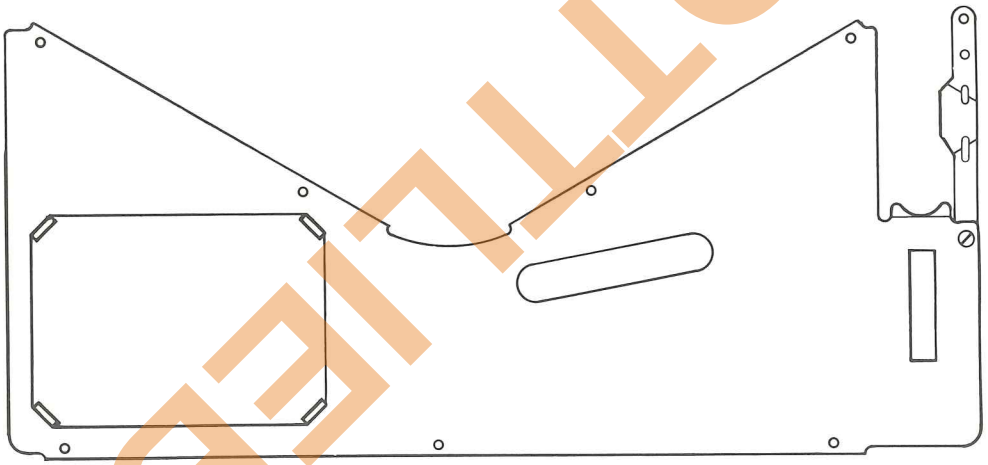


D-6188

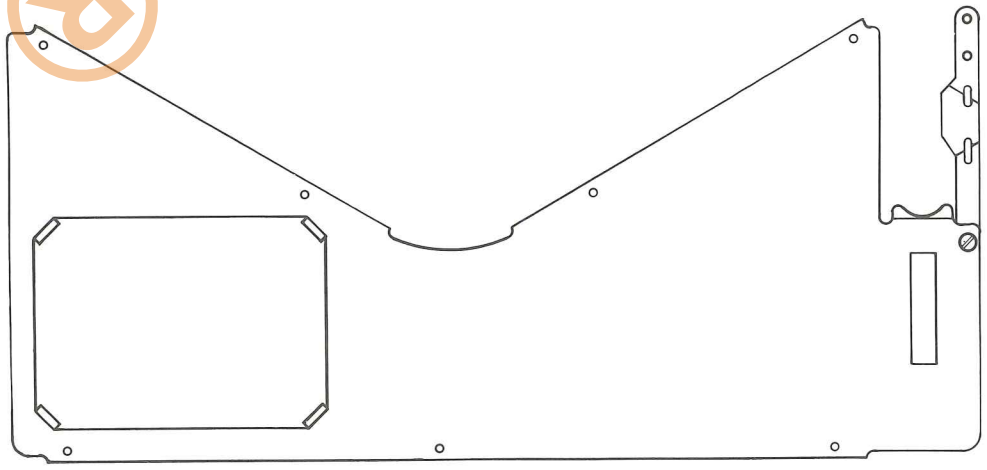

D-6190

GOTTLIEB®


WIRING DIAGRAM SYMBOLS

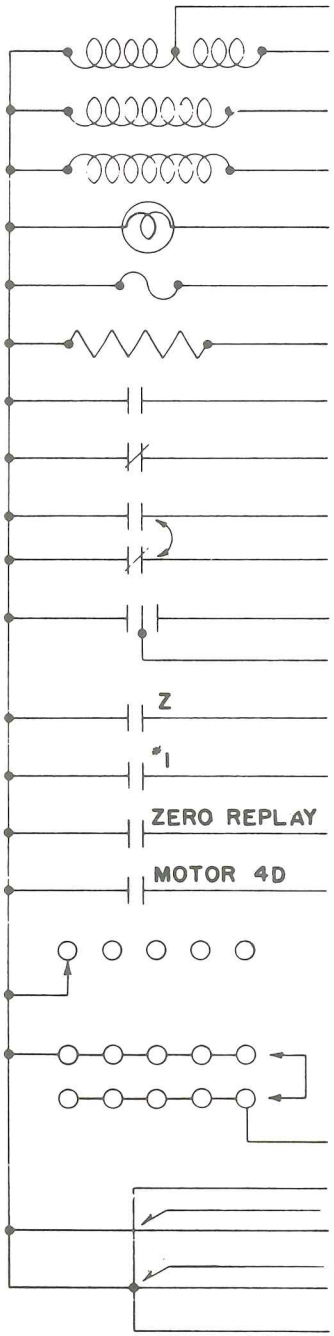


NOTE:


SWITCHES ON CIRCUIT DIAGRAMS ARE SHOWN WITH GAME IN RESET POSITION—LINE CORD DISCONNECTED FROM POWER OUTLET. BANKS SHOWN WITH ALL RELAYS SET-UP.

TRANSFORMER

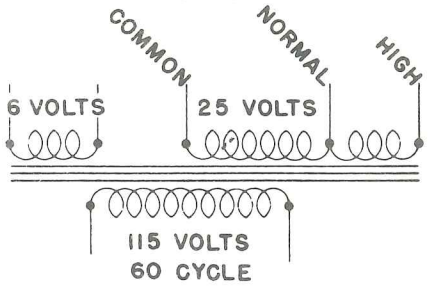

MOTOR SWITCH POSITIONS

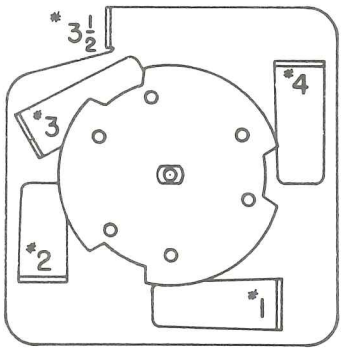

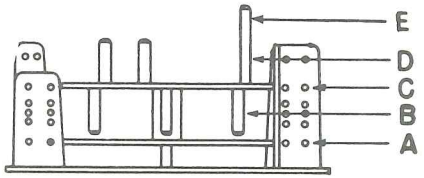

"COLOR CODE ABBREVIATIONS"

BL = BLUE	SL = SLATE
BR = BROWN	YEL = YELLOW
BLK = BLACK	WH = WHITE
GR = GREEN	MAR = MAROON
OR = ORANGE	PUR = PURPLE

EXAMPLE:

BL - WH = BLUE WITH A WHITE TRACER.

BL & WH = BLUE AND WHITE MOTTLED.



GOTTLIEB®

GAME LUBRICATION

Use the following lubricants available from D. GOTTLIEB & COMPANY distributors:

Gottlieb White Lube – approximately ½ oz. tube ..... $ .25
Gottlieb Black Lube – approximately ½ oz. tube ..... $ .25

A-6699 Motor: 10 drops Fine Oil through 3/8" round hole located on motor switch mounting plate 1" from motor coil.
Motor unit cam edges: White Lube.
Step switch gear shaft: Fine Oil.
Step switch gear: Black Lube (Not on 10 Step Unit).
Step switch torsion spring: Fine Oil.
Step switch reset arm pivot. Fine Oil.
Step switch drive arm pivot: Fine Oil (Not on 10 Step Unit).
Wiper discs and rivet heads: White Lube
Flipper shaft and bushing: Nylon bushing: No lubricant.
Flipper switch links: White Lube.
Cabinet push button and bushing: White Lube.
Ball shooter plunger: Fine Oil.
Ball lift plunger shaft: Fine Oil.
Ball lift plunger shaft sleeve: Inside sleeve: Fine Oil; Front face of sleeve: White Lube.
Ball elevator arm: White Lube.
Coil driven bank set up arm: White Lube at ends; Fine Oil on pivot.
Long reset arm inside bank: White Lube.
Kick out hole fulcrum: Fine Oil
Contact ball kicker fulcrum: Fine Oil.
Cup type bumper switch: White Lube in cup.
Masonite ball drop shuffle slides: Soap or paraffin.

IMPORTANT:

Coil plungers such as the "POP" bumper coil plunger, have a bright nickel plate finish and should not be lubricated. If kept clean, these plungers will operate efficiently for the life of the game. Other parts that should not be lubricated are the coin chutes and all relays.

GOTTLIEB®

COIL CHART

REPLACEMENT	
COIL	SLEEVE
A-5197	A-5172
A-5194	A-5064
A-5196	A-5172
A-1496	A-5065
A-5141	A-5064
A-5195	A-5064
A-5194	A-5064
A-5193	A-5171
	A-6087

THE SAME SIZE SLEEVE MAY BE USED IN MORE THAN ONE COIL.

PARTS LIST

‡ Specify game to obtain proper screening.

* Specify part wanted when both numbers are the same.

Date of Mfg.	GAME	Flipper Lever Arms	Flipper Links (Dimensions are to Hole Centers)		Contact Kickers – Left – Right (In Order)	UNITS				Cash Box	FRONT DOORS		SHIELDS	
						Name	Gear or Gear and Shaft	Disc *	Wiper *		Single Chute	Double Chute	Plastic ‡	Metal ‡
1-58	STRAIGHT FLUSH	A-3399 A-3400	A-3395	2 1/4"	A-3056 A-3053	REPLAY 10,000 100,000 0 – 9 ROTO	A-5387 A-4282 A-5384 A-4282 A-4194	B-4795 C-3914 B-3729 C-4757	B-3689 C-3914 B-3689 C-4755	A-4550	C-4537	C-4539	B-4752 A-4751	A-4747 A-4748 A-3060 A-4749 A-4772 A-3810 A-3208 B-4753
2-58	WHIRL-WIND	A-3399 A-3400	A-3395	2 1/4"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS ROTO 0 – 9 BALLS PLAYED	A-5387 C-4770 C-4770 C-4770 A-4194 A-4282 A-5388	B-3866 B-4636 C-4580 B-4028 B-4479	A-4430 A-4431 C-4597 B-3689 B-4479	C-4653	C-4537	C-4538	A-4566 A-4567 B-4569	A-3673 A-4883 A-3208 A-4591 A-3987 A-4231 A-4568
3-58	CRISS CROSS	A-3399 A-3400	A-3395	2 1/4"	A-3056 A-3053	REPLAY 10,000 100,000 0 – 9 ROTO	A-5387 A-4282 A-5383 A-4282 A-4194	C-4800 C-4197 B-3729 C-4790	C-4799 C-4197 B-3689 C-4792	A-4550	C-4537	C-4539	A-4103 B-4783	A-3810 A-4864 A-3060 A-4774
4-58	BRITE STAR	A-3399 A-3400	A-3395	2 1/4"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS ROTO 0 – 9 BALLS PLAYED	A-5387 C-4770 C-4770 C-4770 A-4194 A-4282 A-5388	B-3866 B-4636 C-4841 B-4028 B-4479	A-4430 A-4431 C-4840 B-3689 B-4479	C-4653	C-4537	C-4538	B-4752 A-4751	A-2231 A-3060 A-4748 A-4909 A-4908 B-4753
5-58	ROCKET SHIP	A-3399 A-3400	A-3395	2 1/4"	A-3056 A-3053	REPLAY 10,000 100,000 0 – 9 ROTO	A-5387 A-4282 A-5383 A-4282 A-4194	C-4880 C-2844 B-4520 C-4882	C-4881 C-2844 B-4521 C-4878	A-4550	C-4537	C-4539	A-4865 A-4866	A-4867 A-4868 A-4869
6-58	PICNIC	A-3399 A-3400	A-3395	2 1/4"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS ROTO 0 – 9 BALLS PLAYED	A-5387 C-4770 C-4770 C-4770 A-4194 A-4282 A-5388	B-3866 B-4636 C-4906 C-4904 B-4479	A-4430 A-4431 C-4902 C-4905 B-4479	C-4653	C-4537	C-4538	A-4896 B-4752 A-4751	B-4753 A-3207 A-4898 A-4899 A-4900 A-4901 A-4966
7-58	ROTO-POOL	A-3399 A-3400	A-3395	2 1/4"	A-3056 A-3053	REPLAY 10,000 100,000 0 – 9 ROTO	A-5387 A-4282 A-5383 A-4282 A-4194	C-4945 C-4971 B-3729 C-4946	C-4947 C-4971 B-3689 C-4944	A-4550	C-4537	C-4539	A-4923 A-4365 B-4752 A-4751	B-4753 A-4924 A-4925 A-4926 A-3810 A-4900 A-4898
8-58	GONDOLIER	A-3399 A-3400	A-3395	2 1/4"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS TARGET VALUE 0 – 9 BALLS PLAYED	A-5387 C-4770 C-4770 C-4770 A-4282 A-4282 A-5388	B-3866 B-4636 B-5006 B-4028 B-4479	A-4430 A-4431 B-5006 B-3689 B-4479	C-4653	C-4537	C-4538	A-3205	A-4995 A-4996 A-4997 A-4998 A-2994 A-4869
9-58	SUNSHINE	A-3399 A-3400	A-3395	2 1/4"	A-3056 A-5013	REPLAY 10,000 100,000 0 – 9 ROTO	A-5387 A-4282 A-5383 A-4282 A-4194	B-4795 C-5022 B-4520 C-5023	B-3689 C-5022 B-4521 C-5027	A-4550	C-4537	C-4539	A-4100	A-5009 A-5010 A-3060 A-4898 A-4899 A-4901
10-58	CONTEST	A-3399 A-3400	A-3395 A-5034	2 1/4" 4 1/4"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS ROTO 0 – 9 BALLS PLAYED	A-5387 C-4770 C-4770 C-4770 A-4194 A-4282 A-5388	B-4456 B-4457 C-5038 B-4028 C-5036	A-4430 A-4431 C-5039 B-3689 C-5035	C-4653	C-4537	C-4538	A-5030 A-4865 A-4866	A-5032 A-5033 A-5109 B-4876
11-58	SITTIN' PRETTY	A-3399 A-3400	A-3395	2 1/4"	A-3056 A-3053	REPLAY 10,000 100,000 0 – 9 ROTO	A-5387 A-4282 A-5383 A-4252 A-4194	B-5089 C-4971 B-4520 C-5077	B-5088 C-4971 B-4521 C-5074	A-4550	C-4537	C-4539	B-4783 A-5067	A-5098 A-4899 A-4076
12-58	DOUBLE ACTION	A-3399 A-3400	A-3395	2 1/4"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS RED TARGET YELLOW TARGET 0 – 9 BALLS PLAYED	A-5387 C-4770 C-4770 C-4770 A-4282 A-4282 A-4282 A-5388	B-3866 B-4636 B-5131 B-5131 B-5133 B-5132	A-4430 A-4431 B-3689 B-3689 B-4521 B-5132	C-4653	C-4537	C-4538	A-5119 A-5120 #5891 #4846 #4889 #4837	A-5122 A-2825 A-4749

GOTTLIEB®

PARTS LIST

‡ Specify game to obtain proper screening.

*Specify part wanted when both numbers are the same.

Date of Mfg.	GAME	Flipper Lever Arms	Flipper Links (Dimensions are to Hole Centers)		Contact Kickers —Left — Right (In Order)	UNITS				Cash Box	FRONT DOORS		SHIELDS	
						Name	Gear or Gear and Shaft	Disc *	Wiper *		Single Chute	Double Chute	Plastic ‡	Metal ‡
1-59	STRAIGHT SHOOTER	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY 10,000 100,000 0 – 9 WHITE ADVANCE YELLOW ADVANCE PURPLE ADVANCE	A-5387 A-4282 A-5384 A-4282 A-4282 A-4282 A-4282	 B-4519 C-5085 B-4520 C-5086 C-5086 C-5087	 B-4521 C-5085 B-4521 C-3244 C-3244 C-3244	A-4550	C-4537	C-4539	A-2599 A-4704 B-5083	A-2294 A-5109
3-59	RACE TIME	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS RED YELLOW 0 – 9 BALLS PLAYED	A-5387 C-4770 C-4770 C-4770 A-4282 A-4282 A-4282 A-5388	 B-3866 B-4636 B-5210 B-5209 C-5213 B-5254	 A-4430 A-4431 B-5210 B-5209 C-5211 B-5254	A-4653	C-4537	C-4538	A-4866	A-1572 A-4867 A-4868 A-5204
4-59	HI-DIVER	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY 10,000 100,000 0 – 9 DIVER POINT	A-5387 A-4282 A-5383 A-4282 A-5185 A-5389	 B-4519 C-4971 B-4520 B-5168	 B-4521 C-4971 B-4521 C-5186 B-5168	A-4550	C-4537	C-4539	A-5178	A-5152 A-5153 A-5154
5-59	ATLAS	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS ROTO 0 – 9 BALLS PLAYED	A-5387 C-4770 C-4770 C-4770 A-4194 A-4282 A-5388	 B-3866 B-4636 C-5038 B-5133 C-5253	 A-4430 A-4431 C-5278 B-4521 C-5253	C-4653	C-4537	C-4538	A-5250 B-5252 A-4866 #4890 #4840 #4841	A-1680 A-5251 A-5109
6-59	QUEEN OF DIAMONDS	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY 10,000 100,000 0 – 9 ROTO	A-5387 A-4282 A-5383 A-4282 A-4194	 B-5226 C-4971 B-4520 C-5023	 B-4521 C-4971 B-4521 C-5245	A-4550	C-4537	C-4539	A-3869 C-5221	A-3060 A-5218
7-59	AROUND THE WORLD	A-3399 A-3400	A-3395	2¼"	A-3055 A-3054	REPLAY UNITS TENS HUNDREDS YELLOW RED PURPLE 0 – 9 BALLS PLAYED	A-5387 C-4770 C-4770 C-4770 A-4282 A-4282 A-4282 A-4282 A-5388	 B-3866 B-4636 B-5274 B-5275 B-5275 B-5133 B-5276	 A-4430 A-4431 B-3689 B-3689 B-3689 B-4521 B-5276	C-4653	C-4537	C-4538	A-5271 B-5273 #4838 #4839 #4841	A-2042 A-3748
8-59	MISS ANNABELLE	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY 0 – 9 FAN UNITS TENS HUNDREDS PURPLE TARGET WHITE TARGET	A-5387 A-4282 A-5185 C-4770 C-4770 C-4770 A-4282 A-4282	 B-5133 B-3866 B-5478 B-5131 B-5131	 B-4521 C-5303 A-4430 A-4431 B-3689 B-3689	A-4550	C-4537	C-4539	#4892 #4887 #4839 #4847 A-5119 A-5120	A-5122 A-2825 A-4749
9-59	SWEET SIOUX	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0 – 9 BALLS PLAYED BONUS ROTO	A-5387 C-4770 C-4770 C-4770 A-4282 A-5465 A-4282 A-4194	 B-4456 B-4457 B-3729 C-5323 B-5317 C-5321	 A-4430 A-4431 B-3689 C-5322 B-5317 C-5318	C-4653	C-4537	C-4538	#4890 #4892 #4840 A-5313 A-5314 A-5120	A-1531 B-4876
10-59	UNIVERSE	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY 0 – 9 TRIP SPACE SHIP UNITS TENS HUNDREDS	A-5387 A-4282 A-5389 A-5185 C-4770 C-4770 C-4770	 B-4520 B-5339 B-3866 B-5478	 B-4521 B-5339 C-5540 A-4430 A-4431	D-5460	C-4537	C-4539	A-5329 A-5330	A-5336 A-5542 A-2733
11-59	MADEMOISELLE	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0 – 9 BALLS PLAYED HOLE SCORE	A-5387 C-4770 C-4770 C-4770 A-4282 A-5388 A-4282	 B-3866 B-4636 B-4520 B-5276 C-5354	 A-4430 A-4431 B-4521 B-5276 A-5596	C-4653	C-4537	C-4538	A-5350	A-4995 A-4349 A-1954 A-5569
12-59	LIGHTNING BALL	A-3399 A-3400	A-3395	2¼"	A-3055 A-3054	REPLAY 10,000 100,000 0 – 9 NAME	A-5387 A-4282 A-5383 A-4282 A-5404	 B-4519 C-5595 B-4520	 B-4521 A-5594 B-4521 C-5593	D-5460	C-4537	C-4539	A-5120 A-5396	A-5397

COLLECTOR

‡ Specify game to obtain proper screening.

Date of Mfg.	GAME	Flipper Lever Arms	Flipper Links (Dimensions are to Hole Centers)		Contact Kickers – Left – Right (In Order)	UNITS				Cash Box	FRONT DOORS		SHIELDS	
						Name	Gear or Gear and Shaft	Disc	Wiper		Single Chute	Double Chute	Plastic ‡	Metal ‡
1-60	SEVEN SEAS	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0 – 9 BALLS PLAYED PURPLE BONUS YELLOW BONUS	A-5387 C-4770 C-4770 C-4770 A-4282 A-5388 A-5461 A-5461	 B-3866 B-4636 B-5133 B-5598 B-5477 B-5477	 A-4430 B-4431 B-4521 A-5597 A-5470 A-5470	C-4653	C-4537	C-4538	A-5466 A-5467	A-5468 A-5469 A-2113
2-60	WORLD BEAUTIES	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY 10,000 100,000 0-9 ROTO	A-5387 A-4282 A-5383 A-4282 A-4194	 B-5226 C-5595 B-4520 C-5023	 B-4521 A-5594 B-4521 C-5491	D-5460	C-4537	C-4539	A-3869 C-5221	A-3060 A-5218
3-60	LITE-A-CARD	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0-9 BALLS PLAYED ARROW	A-5387 C-4770 C-4770 C-4770 A-4282 A-5388 A-5726	 B-3866 B-4636 B-4028 B-5598 B-5539	 A-4430 A-4431 B-3689 A-5597 A-5538	C-4653	C-4537	C-4538	A-5529 A-5530	A-5204 A-5613 A-2525 A-2042
4-60	WAGON TRAIN	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0-9 ROTO	A-5387 C-4770 C-4770 C-4770 A-4282 A-4194	 B-3866 B-5478 C-5588 C-5591	 A-4430 A-4431 C-5589 C-5587	D-5460	C-4537	C-4539	A-5571 A-5572 C-5586 B-5760	B-4753 A-1999 A-5584
5-60	TEXAN	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0-9 BALLS PLAYED ROTO	A-5387 C-4770 C-4770 C-4770 A-4282 A-5465 A-4194	 B-4456 B-4457 B-5133 C-5323 C-5693	 A-4430 A-4431 B-4521 C-5322 C-5689	C-4653	C-4537	C-4538	B-5676 A-5120 A-5682	B-4876 A-5686 A-5687
6-60	DANCING DOLLS	A-3399 A-3400	A-3395	2¼"	A-3056 A-3053	REPLAY 10,000 100,000 0-9 POINT	A-5805 A-4282 A-5383 A-4282 A-5386	 B-4519 C-5595 B-4520 C-5645	 B-4521 A-5594 B-4521 A-5594	D-5460	C-4537	C-4539	A-5637 A-5640 A-5178	A-4349
7-60	CAPTAIN KIDD	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0-9 BALLS PLAYED ADVANCE	A-5805 C-4770 C-4770 C-4770 A-4282 A-5388 A-5861	 B-3866 B-4636 B-5621 B-5598 C-5623	 A-4430 A-4431 B-5620 A-5597 A-5622	C-4536	C-4537	C-4538	A-5617	A-5618 A-5625
8-60	SPOT-A-CARD	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0-9 ARROW	A-5805 C-4770 C-4770 C-4770 A-4282 A-4282	 A-5951 A-5951 C-5739 C-5741	 A-5886 A-5886 C-5738 C-5740	D-5460	C-4537	C-4539	A-5713 A-5714 A-5715 A-3985	A-1916
9-60	MELODY LANE	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0-9 BALLS PLAYED ROTO	A-5805 C-4770 C-4770 C-4770 A-4282 A-5388 A-4194	 A-5951 A-5951 A-5756 B-5598 C-5757	 A-5886 A-5886 B-3689 A-5597 C-5755	C-4653	C-4537	C-4538	A-5746 A-5747 A-1470 A-3718 A-3985	B-4876
10-60	KEWPIE DOLL	A-3399 A-3400	A-5857 A-5796	2¼" 5½"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0-9	A-5805 C-4770 C-4770 C-4770 A-4282	 A-5951 A-5951 C-5788	 A-5886 A-5886 C-5787	D-5460	C-4537	C-4539	A-5773 B-5778	A-3060 A-5336 A-2422 A-5469
11-60	FLIPPER	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	UNITS TENS HUNDREDS THOUSANDS BALLS TO PLAY ARROW	C-4770 C-4770 C-4770 C-4770 A-5388 A-4282	A-5907 A-5908 B-5910 B-5909	A-5886 A-5886 A-5906 A-5905	D-5460	C-4540		A-5746 A-5890 A-5887 A-5888 A-5889	
12-60	MERRY-GO-ROUND	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0-9 BALLS PLAYED BONUS	A-5805 C-4770 C-4770 C-4770 A-4282 A-5388 A-5389	 A-5951 A-5951 B-5834 B-5598 C-5835	 A-5886 A-5886 B-4521 A-5597 A-5811	D-5460	C-4537	C-4539	A-5808 A-5809 A-5350	A-2113 A-5810

GOTTLIEB®

PARTS LIST

‡ Specify game to obtain proper screening.

Date of Mfg.	GAME	Flipper Lever Arms	Flipper Links (Dimensions are to Hole Centers)		Contact Kickers – Left – Right (In Order)	UNITS				Cash Box	FRONT DOORS		SHIELDS	
						Name	Gear or Gear and Shaft	Disc	Wiper		Single Chute	Double Chute	Plastic ‡	Metal ‡
1-61	FOTO FINISH	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0-9 CITATION WHIRL-A-WAY MAN-O-WAR SEA BISCUIT	A-5805 C-4770 C-4770 C-4770 A-4282 A-4282 A-4282 A-4282 A-4282	 A-5951 A-5951 C-5875 B-5873 B-5873 B-5873 B-5873	 A-5886 A-5886 C-5874 B-4521 B-4521 B-4521 B-4521	D-5460	C-4537	C-4539	A-5864 A-5865 A-5866 A-5529	A-2075
2-61	OKLAHOMA	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0-9 BALLS PLAYED YELLOW ROTO RED ROTO	A-5805 C-4770 C-4770 C-4770 A-4282 A-5465 A-6126 A-4194	 A-5951 A-5951 B-6134 C-5323 C-6136 C-6135	 A-5886 A-5886 B-6133 C-6603 C-6130 C-6130	D-5460	C-4537	C-4539	A-6116 A-6117 A-4567 A-6118	A-6119 A-6120 A-6322
3-61	SHOW BOAT	A-5982 A-5983 A-5984 A-5985	A-5980 A-5981	2¼" 5 7/32"		REPLAY UNITS TENS HUNDREDS 0-9	A-5805 C-4770 C-4770 C-4770 A-4282	 A-5951 A-5951 B-5987	 A-5886 A-5886 B-5986	D-5460	C-4537	C-4539		A-6157 A-5109
4-61	FLIPPER PARADE	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	UNITS TENS HUNDREDS THOUSANDS BALLS TO PLAY ROTO	C-4770 C-4770 C-4770 C-4770 A-5388 A-4194	 A-6229 B-6291 C-6214	A-5886 A-5886 A-5906 C-6212	D-5460	C-4540		A-6199 B-6200 A-4866	A-2734
5-61	FLYING CIRCUS	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY UNITS TENS HUNDREDS 0-9 BALLS PLAYED	A-5805 C-4770 C-4770 C-4770 A-4282 A-5388	 A-5951 A-5951 B-5133 B-5598	 A-5886 A-5886 B-4521 A-5597	D-5460	C-4537	C-4539	A-5922 A-5923 C-5939	A-6338
7-61	BIG CASINO	A-3399 A-3400	A-5857	2¼"		REPLAY UNITS TENS HUNDREDS 0-9 NAME	A-5805 C-4770 C-4770 C-4770 A-4282 A-5462	 A-5951 A-5951 C-6195 B-6193	 A-5886 A-5886 C-6194 A-5906	D-5460	C-4537	C-4539	A-6191	A-5702
8-61	LANCERS	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY BALLS PLYD. 0-9 UNITS TENS HUNDREDS	A-5805 A-6547 A-6544 C-4770 C-4770 C-4770	 B-6675 B-5133 A-5951 A-5951	 B-6674 B-6673 A-5886 A-5886	D-5460	C-4537	C-4539	A-5992	A-6323
9-61	CORRAL	A-3399 A-3400	A-5857 A-6335	2¼" 4¼"		REPLAY 0-9 UNITS TENS HUNDREDS ROTO	A-5805 A-6544 C-4770 C-4770 C-4770 A-6545	 C-6332 A-5951 A-5951 C-6333	 C-6331 A-5886 A-5886 C-6330	D-5460	C-4537	C-4539	A-5703 A-5724 C-6329	A-3207 A-6323
10-61	FLIPPER FAIR	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	BALLS to PLAY UNITS TENS HUNDREDS THOUSANDS GREEN SPOT CONTROL YEL. SPOT CONTROL	A-6547 C-4770 C-4770 C-4770 C-4770 A-6544 A-6544	B-6671 A-5907 A-6229 B-6587 B-6588	B-6670 A-5886 A-5886 B-6669 B-6669	D-5460	C-4540		A-6575 A-6576 A-6577	
11-61	ALOHA	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY BALLS PLYD. 0-9 UNITS TENS HUNDREDS RED BONUS YEL. BONUS	A-5805 A-6695 A-6544 C-4770 C-4770 C-4770 A-6695 A-6695	 B-6681 C-6351 A-5951 A-5951 B-6349 B-6349	 B-6674 C-6350 A-5886 A-5886 B-6348 B-6348	D-5460	C-4537	C-4539	A-6339 A-6340 B-6343 A-4866	A-2734 A-6342 A-6823 A-6341
12-61	EGG HEAD	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY 0-9 UNITS TENS HUNDREDS	A-5805 A-6544 C-4770 C-4770 C-4770	 B-4520 A-5951 A-5951	 B-6673 A-5886 A-5886	D-5460	C-4537	C-4539	A-6425 A-6426 A-6427 A-6428	A-6430

GOTTLIEB®

PARTS LIST

‡ Specify game to obtain proper screening.

*Specify part wanted when both numbers are the same.

Date of Mfg.	GAME	Flipper Lever Arms	Flipper Links (Dimensions are to Hole Centers)		Contact Kickers – Left – Right (In Order)	UNITS				Cash Box	FRONT DOORS		SHIELDS	
						Name	Gear or Gear and Shaft	Disc *	Wiper *		Single Chute	Double Chute	Plastic ‡	Metal ‡
1-62	LIBERTY BELLE	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY BALLS PLAYED 0-9 UNITS TENS HUNDREDS ROTO C'WISE ROTO C'C'WISE	A-5805 A-6546 A-6544 C-4770 C-4770 C-4770 A-6545 A-6574	 C-6625 C-6627 A-5951 A-5951 C-6629 C-6630	 C-6624 C-6626 A-5886 A-5886 C-6623 C-6623	D-5460	C-4537	C-4539	A-6609 A-6610	C-6607 C-6608 A-6611 B-6617 A-6342
3-62	FLIPPER CLOWN	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	BALLS TO PLAY UNITS TENS HUNDREDS THOUSANDS ROTO LEFT TARGET SCORING RIGHT TARGET SCORING	A-6547 C-4770 C-4770 C-4770 C-4770 A-6545 A-6957 A-6957	B-6671 A-6229 C-6818 C-6817 C-6816	B-6670 A-5886 C-6809 B-6815 B-6814	D-5460	C-4540		A-6789 A-6790	C-6808 B-6617
4-62	TROPIC ISLE	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY 0-9 UNITS TENS HUNDREDS ADVANCE	A-5805 A-6544 C-4770 C-4770 C-4770 A-6544	 B-5133 A-5951 A-5951 C-6502	 B-6673 A-5886 A-5886 C-6501	D-5460	C-4537	C-4539	A-4103 A-6428	A-6500
6-62	FASHION SHOW	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY BALLS PLAYED 0-9 UNITS TENS HUNDREDS TARGET VALUE	A-5805 A-6695 A-6544 C-4770 C-4770 C-4770 A-6503	 B-6681 B-4520 A-5951 A-5951 B-6477	 B-6674 B-6673 A-5886 A-5886 B-6476	D-5460	C-4537	C-4539	A-6464 B-6471 C-6475	A-6465
7-62	COVER GIRL	A-3399 A-3400	A-5857	2¼"	A-3056 A-5013	REPLAY 0-9 UNITS TENS HUNDREDS	A-5805 A-6544 C-4770 C-4770 C-4770	 C-6689 A-5951 A-5951	 C-6688 A-5886 A-5886	D-5460	C-4537	C-4539	A-6682 A-6683 A-4051 A-6199	
8-62	PREVIEW	A-3399 A-3400	A-5857	2¼"	A-3056 A-3053	REPLAY BALLS PLAYED 0-9 UNITS TENS HUNDREDS	A-5805 A-6695 A-6544 C-4770 C-4770 C-4770	 B-6681 C-6514 A-5951 A-5951	 B-6674 C-6510 A-5886 A-5886	D-5460	C-4537	C-4539	A-4365 A-5529 A-6446	A-6508 A-6342
9-62	OLYMPICS	A-3399 A-3400	A-5857	2¼"	A-6832 A-6831	REPLAY 0-9 UNITS TENS HUNDREDS ADVANCE	A-5805 A-6544 C-4770 C-4770 C-4770 A-6547	 C-6839 A-5951 A-5951 B-6837	 C-6838 A-5886 A-5886 B-6836	D-5460	C-4537	C-4539	A-6824 A-6826 A-6827 A-4051 A-5992	A-3748 A-7279
10-62	FLIPPER COWBOY	A-3399 A-3400	A-5857	2¼"	A-6832 A-7283	BALLS TO PLAY UNITS TENS HUNDREDS THOUSANDS ROTO	A-6547 C-4770 C-4770 C-4770 C-4770 A-6545	B-6671 A-5907 A-6229 C-7026	B-6670 A-5886 A-5886 C-7024	D-5460	C-4540		A-6999 A-7000 A-7001	C-6808 B-6617
11-62	SUNSET	A-3399 A-3400	A-5857	2¼"	A-6832 A-6831	REPLAY BALLS PLAYED 0-9 UNITS TENS HUNDREDS SCORE CONTROL	A-5805 A-6695 A-6544 C-4770 C-4770 C-4770 A-7318	 B-6681 B-5133 A-5951 A-5951 B-6890	 B-6674 B-6673 A-5886 A-5886 B-6889	D-5460	C-4537	C-4539	A-4365 A-6882 B-6885	A-2113 A-6883 A-4591
12-62	RACK-A-BALL	A-3399 A-3400	A-5857	2¼"	A-6832 A-6831	REPLAY 0-9 BALL RACK ADVANCE UNITS TENS HUNDREDS	A-5805 A-6544 A-7395 C-4770 C-4770 C-4770	 B-5133 B-6939 A-5951 A-5951	 B-6673 B-6938 A-5886 A-5886	D-5460	C-4537	C-4539	A-6919 A-3257 A-6920	A-6921 A-4349

GOTTLIEB®

PARTS LIST

‡ Specify game to obtain proper screening.

*Specify part wanted when both numbers are the same.

Date of Mfg.	GAME	Flipper Lever Arms	Flipper Links (Dimensions are to Hole Centers)		Contact Kickers – Left – Right (In Order)	UNITS				Cash Box	FRONT DOORS		SHIELDS	
						Name	Gear or Gear and Shaft	Disc *	Wiper *		Single Chute	Double Chute	Plastic ‡	Metal ‡
1-63	GAUCHO	A-3399 A-3400	A-5857	2¼"	A-6832 A-6831	REPLAY BALLS PLAYED 0-9 UNITS TENS HUNDREDS ROTO LEFT TARGET SCORE CONTROL RIGHT TARGET SCORE CONTROL	A-5805 A-6546 A-6544 C-4770 C-4770 C-4770 A-6545 A-7467 A-7467	 C-7097 B-3729 A-5951 A-5951 C-7096 B-7094 B-7094	 C-6624 B-7092 A-5886 A-5886 C-7090 B-7093 B-7093	D-7216	D-7211	D-7211	A-2905 A-5992	A-2042 C-7089 B-6617 A-6615 A-7499
5-63	SLICK CHICK	A-3399 A-3400	A-5857	2¼"	A-6832 A-6831	REPLAY 0-9 UNITS TENS HUNDREDS ADVANCE	A-5805 A-6544 C-4770 C-4770 C-4770 A-7318	 B-3729 A-5951 A-5951 B-7180	 B-6673 A-5886 A-5886 B-7179	D-7216	D-7211	D-7211	A-7171 A-7172 A-4103	A-7173 A-7174
6-63	SQUARE HEAD	A-3399 A-3400	A-5857	2¼"	A-6832 A-6831	BALLS TO PLAY UNITS TENS HUNDREDS THOUSANDS	A-6547 C-4770 C-4770 C-4770 C-4770	B-6671 A-7295 A-7295 A-6229	B-6670 A-5886 A-5886 A-5886	D-7216	D-7211		A-7280 A-2905 A-5889 A-6427	A-2734 A-7301
7-63	SWING-A-LONG	A-3399 A-3400	A-5857	2¼"	A-6832 A-6831	REPLAY BALLS PLAYED 0-9 UNITS TENS HUNDREDS	A-5805 A-6695 A-6544 C-4770 C-4770 C-4770	 B-7034 B-4520 A-5951 A-5951	 B-6674 B-6673 A-5886 A-5886	D-7216	D-7211	D-7211	A-4051 A-5992 A-6980	A-5152
10-63	SWEET HEARTS	A-3399 A-3400	A-5857	2¼"	A-6832 A-6831	REPLAY 0-9 UNITS TENS HUNDREDS	A-5805 A-6544 C-4770 C-4770 C-4770	 B-3729 A-5951 A-5951	 B-6673 A-5886 A-5886	D-7216	D-7211	D-7211	A-7319 A-7320 A-6425	A-5469
	FLYING CHARIOTS	A-3399 A-3400	A-5857	2¼"	A-6832 A-6831	REPLAY BALLS PLAYED 0-9 UNITS TENS HUNDREDS ADVANCE	A-5805 A-6695 A-6544 C-4770 C-4770 C-4770 A-6544	 B-7034 C-7461 A-5951 A-5951 B-7462	 B-6674 C-7460 A-5886 A-5886 B-6669	D-7216	D-7211	D-7211	A-7455 A-7456 A-5120	A-7457 A-7465

GOTTLIEB®

PRICE LIST

Arranged by Groups of Related Parts

COMPLETE ASSEMBLIES

	Motor unit	$35.00
	10,000 unit	20.00
	100,000 unit	25.00
	Roto unit	30.50
	Units unit (specify 1st, 2nd, 3rd, or 4th player)	20.00
	Tens unit (specify 1st, 2nd, 3rd, or 4th player)	18.50
	Hundreds unit (specify 1st, 2nd, 3rd, or 4th player)	20.00
	Replay unit	20.50
	2 step replay unit	31.00
	Stretched rubber contact kicker	5.00
	Ball hole kicker	5.25
	Out hole ball drop unit	2.75
	Counter	4.50
	Balls played unit	Price on Application
	0-9 unit	Price on Application

BANK SET-UP ASSEMBLY

A-262	Coil plunger	$ .56
A-266	Coil housing base	.60
A-824	Set-up arm shoulder screw	.12
A-825	Bushing for A-1848 arm	.16
A-1318	Coil	2.20
A-1402(SA)	Coil stop, with A-1403 collar and 12-28 coil stop hex nut	.35
A-1847	Set-up assembly frame	.66
A-1848	Bank set-up arm	.66
B-3423	Bank set-up assembly, complete	6.60
A-4590	Coil housing cover with stop	1.30

BUMPER PARTS

A-590	Plunger spring	$ .06
A-1215	Formed switch blade with silver point	.26
A-1216	Bumper contact mounting bracket	.22
A-1218	Pop bumper plastic skirt	.22
A.1311	Plunger stop and coil mounting bracket	.55
A-1316	Metal ring and shaft assembly	.66
A-2025	Pop bumper cap (specify color)	.30
A-2435	Pop bumper coil	1.65
A-2661	Slotted metal yoke	.14
A-2662	Bakelite insulation yoke	.25
A-2663	Yoke plunger	.55
A-4634	"Z" coil mounting bracket with stop	.80
A-4893	Pop bumper coil	1.65
A-4949	Pop bumper coil and bracket assembly (specify game)	4.50
#7	Bumper spring	.02
#131	Bumper socket	.14
#E-286	Two tone plastic cap	.40
#14W	Pop bumper base	.14
#25W	Pop bumper body	.22
#SB	Pop bumper switch	1.10

5 BALL CABINETS

	Cabinet only	$50.00
	Lightbox only	18.50
	Lightbox with door	24.00
D-4820	Lightbox door only	6.50
	Screened lightbox glass	16.00
	Plexi glass screened	21.00
	Screened playboard	45.00
A-1009	Side moulding, left or right	2.00
	Front moulding less hardware	2.75
D-2876(SA)	Front moulding with hardware	3.00
D-3768	Painted steel leg (4 per set)	3.00 ea.
	21" x 43" Top glass	6.50
D-4769	Screened score card holder	6.50

MULTIPLE PLAYER DELUXE CABINETS

	Cabinet only	$64.50
	Lightbox only	24.25
	Lightbox with door	30.00
D-4825	Lightbox door only (2 player)	6.75
C-3530	Lightbox door only (4 player)	5.75
	Screened lightbox glass	18.00
	Plexi glass for deluxe cabinet lightbox	25.00
	Screened playboard	45.00
	Lightbox moulding-side, left or right	2.00
A-3150	Side moulding, left or right	2.30
D-3167	Front moulding only	4.00
D-3167(SA)	Front moulding with hardware	6.00
D-4337	Painted steel leg (4 per set)	3.00 ea.
D-4766	Score card holder, screened metal	6.00

MODEL "SS" CABINETS

D-3768	Plated Steel leg (4 per set)	$ 3.00 ea.
D-5993	Cabinet only	69.50
D-5994	Pedestal only	2.80
D-5995	Lightbox only	26.00
	Lightbox with metal door	31.75
D-6025	Lightbox metal door only	6.75
	Screened lightbox glass	16.00
	Plexi-glass screened	21.00
	Screened playboard	45.00
D-6031	Front moulding assembly	9.50
D-6034	Right side stainless moulding	9.50
D-6035	Left side stainless moulding	9.50
D-6038	Back "U" trim	2.65
D-6039	Back glass stop stainless trim	2.65
	21"x 43" Top Glass	6.50

MODEL "SS3" CABINETS

D-3768	Plated steel leg (4 per set)	$3.00 ea.
D-7422	Cabinet only	75.50
D-5994	Pedestal only	2.80
D-5995	Lightbox only	26.00
D-6025	Lightbox metal door only	6.75
	Lightbox with metal door	31.75
	Screened lightbox glass	16.00
	Plexi-glass screened	21.00
	Screened playboard	45.00
D-7446	Lockdown front moulding assembly	10.50
D-7445	Lockdown front moulding slide assembly	7.50
D-6034	Right side stainless moulding	9.50
D-6035	Left side stainless moulding	9.50
D-6038	Back "U" trim	2.65
D-6039	Back glass stop stainless trim	2.65
	21" x 43" top glass	6.50

GOTLIEB®

PRICE LIST

Arranged by Groups of Related Parts

MODEL "SL" CABINETS

D-4337	Plated steel leg (4 per set)	$ 3.00 ea.
D-6038	Back "U" trim	2.65
D-6039	Back glass stop stainless trim	2.65
D-6055	Cabinet only	82.00
D-6056	Pedestal only	3.00
D-6057	Lightbox only	28.00
C-6089	Right corner trim	5.00
C-6090	Left corner trim	5.00
D-6106	Front stainless moulding	7.00
D-6107	Right side stainless moulding	12.50
D-6108	Left side stainless moulding	12.50
D-6111	Lightbox metal door only	7.00
	Lightbox with metal door	34.00
	Screened lightbox glass	18.00
	Plexi-glass screened	25.00
	Screened playboard	45.00
	Front moulding assembly	28.50
	21" x 43" top glass	6.50
C-6104	Front moulding lock assembly	4.00

MODEL SL2 CABINETS

D-4337	Front, plated steel legs (2 each per set)	$ 3.00 ea.
D-3768	Back, plated steel legs (2 each per set)	3.00 ea.
D-7269	Cabinet only	90.00
D-6056	Pedestal only	3.00
D-6057	Lightbox only	28.00
D-6111	Lightbox metal door only	7.00
	Lightbox with metal door	34.00
	Screened lightbox glass	18.00
	Plexi-glass screened	25.00
	Screened playboard	45.00
	Front moulding assembly	28.50
C-6089	Right corner trim	5.00
C-6090	Left corner trim	5.00
D-6106	Front stainless moulding	7.00
C-6104	Front moulding lock assembly	4.00
D-6107	Right side stainless moulding	12.50
D-6108	Left side stainless moulding	12.50
D-6038	Back "U" trim	2.65
D-6039	Back glass stop stainless trim	2.65
	21" x 43" top glass	6.50

CABINET DOORS (Specify game)

C-4537	Small & large painted cabinet door (Metal) one chute	4.00
C-4537	Plated single chute cabinet door, "SS" & "SL" models	4.00
C-4538	Large painted cabinet door (Metal) two chutes	4.30
C-4539	Small painted cabinet door (Metal) two chutes	4.30
C-4539	Plated double chute cabinet door, "SS" & "SL" models	4.30
C-4540	Plated single chute cabinet door, multiple balls game	4.00
D-4820	Metal lightbox door small cabinet	6.50
D-4825	Metal lightbox door Deluxe cabinet	7.00
D-6025	Model "SS" Lightbox door	6.75
D-6111	Model "SL" Lightbox door	7.00
	Complete cabinet door with 5¢ or 10¢ coin rejector	$25.00
	Complete cabinet door with 5¢ or 10¢ and 25¢ rejector	40.00
D-7211	SS3 & SL2 Front door only	$ 13.00
	SS3 & SL2 Front door with hinge only	15.25
	SS3 & SL2 Front door complete with 5¢ or 10¢ rejector	33.50
	SS3 & SL2 Front door complete with 5¢ or 10¢ and 25¢ rejector	51.10
A-7181	Front door hinge nut strip	.40
B-7196	Front door hinge	1.20
B-7189	Front door lock cam	.60
A-7188	Front door lock cam for ace type lock	.60
A-7584	Front door lock cam for duo type lock	1.00
A-7185	Front door lock strike plate	.30
A-7186	Front door lock bolt	.40
A-7187	Front door lock bolt guide	.35
B-7192	Front door coin guide trough	2.90
B-7193	Front door coin return housing	1.50
B-7194	Front door coin return cover	1.00
A-7495	Front door coin return baffle plate	.20
A-7478	Front door hole plug	.30

MISCELLANEOUS CABINET HARDWARE

C751S	Front door lock	$1.75
	Straight cam for lock	.14
	Lock mounting plate	.14
	Lock spur washer	.10
3B2	Carbon tilt bob	.50
	1" Steel ball	.50
	1-1/6" Steel ball	.60
#A33	Adhesive sponge rubber 21" long	.12
#42E-058	5/16 – 18 Elastic stop nut	.12
A-974	Cabinet push button bushing	.40
A-3185	Moulding hookeye, right	.60
A-3186	Moulding hookeye, left	.60
A-3187	Front moulding hook	.35
C-3195	Front moulding latch strip	1.10
A-3198	Latch lever door bracket	.14
B-3233	Armour plate	1.10
B-3234	Armour plate	1.10
A-3775	3/8-16 x 2-3/8" leg mounting bolt	.16
A-3918	Lite box mounting washer	.04
A-4263	Push button link assembly	.45
A-4264	Deluxe push button link assembly left	.45
A-4265	Deluxe push button link assembly right	.45
C-4559	Armour plate (front)	.55
A-4585	8-32 x 1" Carriage bolt	.07
A-4586	8-32 x 1-1/8" Carriage bolt	.07
A-4719	8-32 x 1-1/4" Carriage bolt	.08
A-4853	Lightbox insert lock stop plate	.20
A-4854	Lightbox insert shoulder bushing	.08
B-4858	Lightbox insert lock lever, small cabinet	.80
B-4859	Lightbox insert lock lever, small cabinet	.80
B-4860	Lightbox insert lock lever, large cabinet	.90
B-4861	Lightbox insert lock lever, large cabinet	.90
B-6046	Model "SS" insert lock lever – right hand	.80
B-6047	Model "SS" insert lock lever – left hand	.80
	8-32 Hex nuts, per C	.69
	10-32 x 1-1/4 Truss head machine screws, per C	1.85
	10-32 Elastic stop nut	.06
	#10 slotted cupped spring washer	.02

COPYLEFT

PRICE LIST

Arranged by Groups of Related Parts

MISCELLANEOUS CABINET HARDWARE (Cont.)

	5/16-18 x 1-1/2" Lightbox mounting bolt	.05
	3/8" Hex nuts for leg adjusters	.06
	Legbolt washers	.04
	Leg adjuster	.30
	Leg adjuster mounting plate	.14
	3/8-16 x 3-3/4 hex head cap screws	.12
	3/8 "T" nuts	.08
B-7039	Playboard auto clamp left strike bracket	.40
B-7040	Playboard auto clamp right strike bracket	.40
B-7043	Playboard auto clamp handle	1.00
C-7589	Playboard auto clamp left assembly	6.50
C-7590	Playboard auto clamp right assembly	6.50
C-7198	Auto clamp playboard support	1.65
	#10-32 x 1/4 button head socket cap screws for door hinge	.08

COILS

A20-2	Counter coil	$1.30
A20-4	Drive coil	1.95
A20-6	Kicker and flipper coil	1.65
A20-8	Kicker and flipper coil	1.65
R20-2	Relay coil	.90
R20-4	Relay coil	.90
R20-5	Relay coil	.90
R20-6	Relay coil	1.05
R20-7	Relay coil	2.20
SC20-1	Magnet coil	.90
A-1084	Relay coil	.90
A-1118	Bank coil	.80
A-1119	Bank coil	.80
A-1496	Drive coil	1.50
A-1497	Brass sleeve	.30
A-1856	Bank coil	1.65
A-3498	Magnet relay coil	.90
A-3890	Interlocking relay coil	1.65
A-3891	Interlocking relay coil	.90
A-4893	"POP" bumper coil	1.65
A-5064	Plastic slip in core 1-21/32"	.20
A-5065	Plastic slip in core 1-7/8"	.20
A-5141	Flipper coil	1.65
A-5142	Plastic slip in core 2-3/4"	.20
A-5143	Bell coil	1.65
A-5171	Plastic slip in core 1-19/32"	.20
A-5172	Plastic slip in core 2-1/2"	.20
A-5193	10 Step unit drive coil	1.40
A-5194	Contact kicker coil	1.65
A-5195	Ball stop coil	1.95
A-5196	Bank setup coil	2.20
A-5197	Drive coil	1.95
A-5294	Relay coil	1.65
A-5457	Interlocking relay coil	.90
A-5662	Coil – Dancer unit	.90
A-5723	Hole kicker coil	1.65
A-6088	Shooter coil	1.65
A-6698	Relay coil	$ 1.65
A-6821	Relay coil	.90
A-7112	Bank coil	1.65

FLIPPER PARTS

A-272	Coil plunger	$ .56
A-974	Cabinet push button bushing	.40
A-2408	Nylon flipper shaft bushing	.30
A-2426	Nylon flipper shaft bushing (cut)	.36
A-3328	Flipper return spring (left)	.50
A-3329	Flipper return spring (right)	.50
A-3396	Flipper link and plunger	.90
A-3399	Flipper lever arm	.56
A-3400	Flipper lever arm	.56
A-4263	Push button switch link assembly, (small cabinet)	.45
A-4264	Push button switch link assembly, left (large cabinet)	.45
A-4265	Push button switch link assembly, right (large cabinet)	.45
A-5024	Flipper stop bracket	.30
A-5093	Plastic flipper/vertical lettering	.20
A-5094	Plastic flipper/horizontal lettering	.20
A-5095	Plastic flipper/horizontal lettering	.20
A-5147	Flipper coil mounting bracket	.25
A-5148	"U" Coil mounting bracket	.45
A-5189	Rear coil mounting bracket and stop	.85
A-5391	Flipper A-5093 and shaft assembly	.55
A-5392	Flipper A-5094 and shaft assembly	.55
A-5393	Flipper A-5095 and shaft assembly	$ .55
A-6091	Model "SL" push button bushing	.40
A-6095	Model "SL" push button switch link assembly – right	.50
A-6096	Model "SL" push button switch link assembly – left	.50
#55L	Flipper button switch assembly, left	.55
#55R	Flipper button switch assembly, right	.55
	6-32 x 1-1/4" oval head machine screws, per C	1.08
A-6888	Flipper Shaft & shoe assembly	.50

LAMPS

#44		$ .12
#55		.14
#63		.16
#81		.20
#159		.20
#257		.30
#259		.20
#1129		.30

LAMP SOCKETS

#131	Bumper socket	$ .14
A-1363	Lightbox socket (short)	.12
A-2913	Playboard socket	.16
A-2914	Playboard socket	.16
A-2915	Playboard socket	.16
A-2916	Playboard socket	.16
A-3024	Recessed playboard socket	.20
A-3030	Playboard and lightbox socket	.18
A-3140	10 step unit socket	.10
A-3146	Playboard socket, double lug	.10
A-3350	Lightbox socket for #81 bulb	.20
A-3561	Playboard socket, double lug	.16
A-4036	Socket for pool table	.10
A-4330	Lightbox socket long	.08

GOTTLIEB®

PRICE LIST

Arranged by Groups of Related Parts

LAMP SOCKETS (Cont.)

A-4762	Playboard socket	.16
A-5844	Playboard socket	.30
A-6413	Playboard socket, single lug	$ .20
A-6414	Playboard socket – double lug	.25
A-6572	Wedge lampholder	.20
A-6916	Lightbox illumination for # 63 lamp	.25

PLASTICS (Specify Color)

#1-2	Round post	$ .10
#1-3	Round post flat top	.14
#14W	Bumper base	.14
#25	Regular bumper body	.22
#25W	Pop bumper body	.22
#28	Regular bumper assembly, complete with #30 or #33 cap	$1.00
#28W	Pop bumper assembly, complete with pop cap	1.90
#30	Round bumper cap (plain)	.14
#30A	Round bumper cap (lettered)	.18
#33	Two toned bumper cap (lettered)	.20
#44	Island	.18
#47	Ball lift housing	.70
#48	Red plunger housing	1.00
#48	White plunger housing	1.25
#52	Rollover guide 2"	.08
#54	Rollover guide 1-1/2"	.08
#84	Rollover guide 1"	.07
#6371	Nylon step up arm	.20
#250	Plain star cap for pop bumper	.30
#E286	Two toned pop bumper cap	.40
#192-104	Plastic hole liner	.20
#339-10	Playboard insert 5/8"	.06
#339-12	Playboard insert 3/4"	.08
#339-14	Playboard insert 7/8"	.10
#339-16	Playboard insert 1"	.11
#339-103	Playboard insert 1-3/16"	.12
#339-104	Playboard insert 1-1/4"	.14
#339-200	Playboard insert 2"	.20
#2202	Blue round post, flat top, 1" high	$ .10
#2203	Green round post, flat top, 1" high	.10
#2204	Purple round post, flat top, 1" high	.10
#2205	Red round post, flat top, 1" high	.10
#2206	White round post, flat top, 1" high	.10
#2207	Yellow round post, flat top, 1" high	.10
#4876	Blue plastic guide rail 1-1/2" centers double apron	.14
#4877	Green plastic guide rail 1-1/2" centers double apron	.14
#4878	Purple plastic guide rail 1½" centers double apron	.14
#4879	Red plastic guide rail 1-1/2" centers double apron	.14
#5880	White plastic guide rail 1-1/2" centers double apron	.14
#4881	Yellow plastic guide rail 1-1/2" centers double apron	.14
#4836	Blue plastic guide rail 2-1/8" centers single apron	.18
#4837	Green plastic guide rail 2-1/8" centers single apron	.18
#4838	Purple plastic guide rail 2-1/8" centers single apron	.18
#4839	Red plastic guide rail 2-1/8" centers single apron	.18
#4840	White plastic guide rail 2-1/8" centers single apron	.18
#4841	Yellow plastic guide rail 2-1/8" centers single apron	.18
#4842	Blue plastic guide rail per A-5188	.20
#4843	Green plastic guide rail per A-5188	.20
#4844	Purple plastic guide rail per A-5188	.20
#4845	Red plastic guide rail per A-5188	.20
#4846	White plastic guide rail per A-5188	.20
#4847	Yellow plastic guide rail per A-5188	.20
#4887	Blue plastic guide rail 2-1/8" centers double apron	.16
#4888	Green plastic guide rail 2-1/8" centers double apron	.16
#4889	Purple plastic guide rail 2-1/8" centers double apron	$ .16
#4890	Red plastic guide rail 2-1/8" centers double apron	.16
#5891	White plastic guide rail 2-1/8" centers double apron	.16
#4892	Yellow plastic guide rail 2-1/8" centers double apron	.16
#4793	Blue plastic guide rail 2-1/2" centers single apron	.19
#4794	Green plastic guide rail 2-1/2" centers single apron	.19
#4795	Purple plastic guide rail 2-1/2" centers single apron	.19
#4796	Red plastic guide rail 2-1/2" centers single apron	.19
#4797	White plastic guide rail 2-1/2" centers single apron	.19
#4798	Yellow plastic guide rail 2-1/2" centers single apron	.19
#4893	Blue plastic guide rail 2-1/2" centers double apron	.18
#4894	Green plastic guide rail 2-1/2" centers double apron	.18
#4895	Purple plastic guide rail 2-1/2" centers double apron	.18
#4896	Red plastic guide rail 2-1/2" centers double apron	.18
#6855	White plastic guide rail 2-1/2" centers double apron	.18
#4897	Yellow plastic guide rail 2-1/2" centers double apron	.18
A-945	Plastic hole cover	.12
A-1217	Regular bumper skirt	.22
A-1218	Pop bumper skirt	.22
A-2007	Large target (blue rings)	.25
A-2013	Small target (blue rings)	.20
A-2025	Pop star cap for pop bumper	.30
A-2068	"1 point when lit" pop cap	.30
A-2305	Red, green or yellow light shade	.05
A-2408	Nylon flipper shaft bushing	.30

COPY FILE

PRICE LIST

Arranged by Groups of Related Parts

PLASTICS (Cont.)

A-2433	Plain billiard ball	.33
A-2728	Nylon drive lever tip	.18
A-3319	#20 Target	.20
A-3320	#30 Target	.20
A-3321	#40 Target	.20
A-3322	#50 Target	.20
A-3369	#10 Target	.20
A-3896	Nylon bushing	.12
A-4546	Nylon ball lift bushing	.75
B-4953	Pool balls-complete set (15) for lightbox	12.00
A-5093	Flipper – vertical lettering	.20
A-5094	Flipper – horizontal lettering	.20
A-5095	Flipper – horizontal lettering	.20
A-5136	Plain target-cut	.20
A-5201	1" Dia. plain target	.20
A-5217	1" Dia. "Bullseye" target	.25
A-6424	"Hula Girl" design bumper cap	$ .25
A-6435	"O" Target	.16
A-6436	"X" Target	.16
A-6828	"Torch" design bumper cap	.30
A-6829	"Star" Target	.16
A-6931	1¼ dia. red or white marblette balls	.48
A-7002	"100 points when lit" bumper cap	.40
A-7028	"50 points, spin" bumper cap	.30
A-7033	Red, green or yellow light shade	.03
3/16"	Plastic cable clamp	.04
5/16"	Plastic cable clamp	.05
3/8"	Plastic cable clamp	.06

"AG" RELAY

A-4981	Switch cover plate	$ .04
C-4989	Housing	.80
A-5081	Spring	.05
A-5363	Switch stack "A" lockin	.50
A-5364	Switch stack "A" small points	.44
A-5365	Switch stack "A" large points	.44
A-5366	Switch stack "B" small points	.44
A-5367	Switch stack "B" large points	.44
A-5368	Switch stack "C" small points	.66
A-5369	Armature and short insulator arm	.40
A-5370	Armature and long insulator arm	.42
A-5419	.010 feeler gauge	.12
A-5420	.019 feeler gauge	.12
	Assembled "AG" relay prices are:	
	"AG" relay with R20-2 coil less switches	2.55
	"AG" relay with R20-4 coil less switches	2.55
	"AG" relay with R20-5 coil less switches	2.55
	"AG" relay with A-5294 coil less switches	3.30
	"AG" relay with A-1084 coil less switches	2.55
	For each "A" switch with lockin (type 1) add	$ .50
	For each "A" switch small points (type 2) add	.44
	For each "A" switch large points (type 3) add	.44
	For each "B" switch small points (type 4) add	.44
	For each "B" switch large points (type 5) add	.44
	For each "C" switch small points (type 6) add	.66
	Total the above to obtain price of assembled relay req'd.	

INTERLOCK RELAY

1A Interlock relay (specify coils)	$5.40
1A-1B Interlock relay (specify coils)	5.85
1A-2C Interlock relay (specify coils)	6.75
2A-2B Interlock relay (specify coils)	5.85
2A-1C Interlock relay (specify coils)	6.50
1B-2C Interlock relay (specify coils)	6.75
2B-1C Interlock relay (specify coils)	6.50
3A-1B Interlock relay (specify coils)	$ 5.75

MAGNET RELAY

A-324	Armature	$ .16
B-1507	Magnet relay frame	.56
A-1671	Armature spring	.06
A-1912	Armature spring	.10
A-4965	Armature spring	.06
	1A, R20-5 Coil, magnet type relay	2.75
	2A, R20-4 Coil, magnet type relay	3.20
	3A, R20-4 Coil, magnet type relay	3.70
	4A, R20-4 Coil, magnet type relay	4.00
	1A-1C, R20-5 Coil, magnet type relay	3.20
	2A-1C, R20-5 Coil, magnet type relay	$3.70
	4A-2B Magnet relay (specify coil)	4.75
	3A-2B-1C Magnet relay (specify coil)	4.85
	3A-1B-1C Magnet relay (specify coil)	
	5A-2B, R20-5 Coil, magnet type relay	$ 5.00
	1A-2B-1C, A3498 Coil, magnet type relay	3.75
	6A, R20-6 Coil, magnet type relay	4.65
	1A-3B-1C Magnet type relay	4.25
	1C Magnet type relay	2.50

"R" TYPE RELAY

A-216	One station relay mounting bracket	$ .50
A-557	Coil frame	.78
A-561	Upper make blade and point	.22
A-562	Upper break blade and point	.22
A-563	Lower make blade and point	.22
A-564	Backing plate (upper break)	.12
A-565	Flat head silver point	.05
A-574	Armature spring	.04
A-577	Flexible pigtail wire	.16
A-578	Lower break blade and point	.22
A-579	Silver washer	.03
A-951	1A Armature assembly complete	.80
A-952	2A Armature assembly complete	1.00
A-953	3A Armature assembly complete	1.55
A-954	4A Armature assembly complete	1.66
A-955	1B Armature assembly complete	.80
A-956	2B Armature assembly complete	1.00
A-957	3B Armature assembly complete	1.55
A-958	4B Armature assembly complete	1.66
A-959	1C Armature assembly complete	1.32

GOTTLIEB®

PRICE LIST

Arranged by Groups of Related Parts

"R" TYPE RELAY (Cont.)

A-960	2C Armature assembly complete	1.55
A-961	1A-1B Armature assembly complete	1.45
A-962	1A-1C Armature assembly complete	1.45
A-963	2A-1B Armature assembly complete	1.65
A-964	1B-1C Armature assembly complete	1.45
A-2041	Relay point, silver (3/32" shank)	.04
A-2846	Heavy pigtail wire	.18
A-3027	1A-1B-1C Armature assembly complete	1.55
A-4429	2A-2B Armature assembly complete	1.74
A-4629	2A-1B-1C Armature assembly complete	1.87
A-4887	3A, 1B Armature assembly	1.70
A-5139	3A, 1C Armature assembly	1.70
A-5240	Rubber grommet for mounts	.03

RELAY BANK

A-276	Reset arm spring	$ .06
A-375(SA)	Bank armature with stainless steel rivet	.22
A-375A	Bank armature with fibre	.22
A-727	Bank flap pin	.05
A-728	Bank armature spring	.04
A-729	Bank flap spring	.04
A-1083	Flap pin insulator	.04
A-1843	Hex head shoulder screw	.14
A-4071	Stainless steel armature rivets, ... per C	.90
A-4420	Bank flap assembly	.56

RESISTORS

	470 OHM 2 Watt	.24
	75 OHM 10 Watt	.24
	62 OHM 10 Watt	.24

RETAINING RINGS

#5133-18	Retaining ring	$ .03
#5133-25	Retaining ring	.04
#5133-37	Retaining ring	.05

RUBBER PARTS

#1	Rubber ring (R-288) 3/8"	$ .05
#2	Rubber ring (R-101) 3/4"	.06
#10	Rubber ring (R-66) 1"	.08
#11	Rubber ring (R-40) 1-1/2"	.09
#12	Rubber ring 2"	.12
#14	Rubber ring 2-1/2"	.16
#16	Rubber ring 3"	.18
#18	Rubber ring 3-1/2"	.20
#20	Rubber ring 4"	.25
#25	Rubber ring 5"	.40
#162	Rubber support bushing	.08
#962	Rubber rebound for mini-post	.04
#1872	Rubber plunger tip	.08
#A33	3/16 x 1/4 x 21" Lg. adhesive sponge rubber	.12
A-1344	Rubber rebound	.30
A-5240	Rubber grommet	.03
A-7450	Gray rubber plug bumper	.08

SLUG REJECTOR CHUTES

	5¢, 10¢, 25¢ Slug rejector	$ 8.00
	Foreign rejectors	12.00
B-4386	Reject rod	.50
B-4391	Coin feed trough	1.00
B-4392	Coin feed trough cover	.90
B-4395	Coin return turnaround	.50
C-4398	Rejector saddle with A-4386 reject rod & A-4416 arm, Cable and switches	9.60
A-4400	5¢ & 10¢ coin switch arm	$ .25
A-4401	25¢ coin switch arm	$ .25
A-4416	Reject arm	.80
A-4417	Coin return trough	1.50
A-4524	Metal door push button (red button on door)	.25
A-5341	Vibration damper for coin chute switch	.70
A-5362	Vibration damper and coin chute switch	1.45
A-6050	5¢ Coin entrance plate	.50
A-6051	10¢ Coin entrance plate	.50
A-6052	25¢ Coin entrance plate	.50
36CF	Coin rejector saddle switch	.70
215A	Front door button switch	.60
C-7200	"SS3 & SL2" Coin entrance plate 5¢	2.00
C-7202	"SS3 & SL2" Coin entrance plate 10¢	2.00
C-7204	"SS3 & SL2" Coin entrance plate 5¢ & 25¢	2.00
C-7206	"SS3 & SL2" Coin entrance plate 10¢ & 25¢	2.00
B-7447	"SS3" Coin feed trough	1.00
B-7448	"SS3" Coin feed trough cover	.90
B-7587	"SL2" Coin feed trough for 25¢ chute only	1.10
B-7588	"SS3" Coin feed trough for 25¢ chute only	1.10

STEP SWITCH WIPERS

A-303(SA)	Large wiper arm assembly, complete	$2.10
A-303	Large wiper arm, less fingers, bushings, etc.	1.55
A-305	Wiper finger bushing	.08
A-306	Wiper finger	.05
A-307	Wiper finger spring	.03
A-634	Small wiper arm less wiper bushing, wiper fingers, wiper spring	1.40
A-634(SA)	Small wiper arm single row of holes complete	1.90
B-6506	Wiper Arm-5 row span-20 holes	$ .50
A-6507	Wiper arm-5 row span-10 holes	.40
B-6667	Wiper arm-3 row span-12 holes	.40
A-6668	Wiper-arm-3 row span-6 holes	.40
A-7291	Wiper finger .045 THK.	.07
A-7292	Wiper finger bushing for A-7291	.08

SWITCH ASSEMBLIES

#SB	Pop bumper switch assembly	$1.10
#B	Bumper contact switch assembly	.60
#55L	Flipper button switch assembly (left)	.65
#55R	Flipper button switch assembly (right)	.65
#215A	Front door switch	.60
#232	Rubber contact formed switch	.55
#233	Break switch	.35
#36CF	Coin rejector switch	.55
#36QX	Rubber contact straight switch	.55
#106-1A	Hole kicker switch	.45
#394	Rollunder switch	.16
#395	Tilt switch only	1.50
A-2007	Target switch assembly, complete	1.35
S-37-73A	Snap action switch	1.60

©TILT

PRICE LIST

Arranged by Groups of Related Parts

FORMED SWITCH BLADES

A-127		$ .08
A-154		.08
A-786		.08
A-918		$ .08
A-1215	Pop bumper switch blade with point	.26
A-1853		.08
A-1965		.08
A-1968		.08
A-1969		.08
A-2064	Rollover button switch and point	.26
A-3309		.08
A-5634		.06

TRANSFORMERS

A-1691		$11.00
A-1756		12.00
A-2238	220V	17.00
A-2721	Autoformer	12.00
A-3235		12.00
A-3299	Autoformer	15.00
A-3594		12.00
A-4276		10.50
A-4277		13.00
B-5277		Price on application
A-5853		19.80
B-6183		22.00
B-6215	115 V. – 250 V.	22.00
B-6419	250 V. Isolation	22.00
B-6444	115 V. – 230 V.	22.00
B-6445	115 V. – 230 V.	22.00
B-6820	115 V. – 230 V.	22.00
B-6847	250 V. Isolation	28.00

MOTORS

A-5819	Revolving cap	$10.50
A-6699		10.00
	Parts for A-6699 Motor	
	#110 Bearing	.30
	#110A Bearing	.30
	#106 Bearing	.30
	#116-211 Rotor shaft & clutch assembly	1.50
	#116-255 First reduction assembly	1.80
	#116-256 Second reduction assembly	2.40
	#116-259 Output shaft assembly	2.25
	#116-236 Coil winding	2.25
	#116-214 Rotor shaft & clutch with rotor	3.75
	#116-210 Rotor only	2.25
	#337 Stud	.12
	#376A Spring steel washer	.15
	#140 Bakelite washer	.06

WIRE

	Covered pigtail wire, per foot	.06
	Bare pigtail wire, per foot	.05
	Stranded 18 ga. bare, per foot	.05
	Stranded 18 ga. covered, per foot	.06
	Stranded 22 gauge covered wire per foot	.05

MISCELLANEOUS HARDWARE

A-5380	Adjustment screw insulator		.04
	5-40 x 7/8 Replay adjustment screw,	Per C	.40
	5-40 Adjustment screw nut	Per C	.60
	12-28 Hex nut for A-1402 stop		.03
	1/8 x 1/2 roll pin for A-262 plunger		.02
	3/32 x 1/4 roll pin		.02
	1/8 x 9/16 Solid brass rivet		.02
	1/16 x 1/2 Cotter pin		.02
	3/8 Standard washer	Per C	1.12
	6-32 x 1-1/4 Oval head machine screw for flipper	Per C	1.08
	10-32 x 1/4 Socket head screw	Per C	7.00
	1/4-20 x 1/4 Socket screw	Per C	7.10
	Speed nuts #C12005-017		.04
	6-32 Elastic stop nuts		.06
	8-32 x 1/4 Socket head cap screw	Per C	7.62
	8-32 x 1/2 Socket head cap screw	Per C	8.10
	#6x1/4 type 25 self tapping screw	Per C	.65
	#6x1/2 washer head wood screw	Per C	1.00
	#4 truss head drive nail		.02
	#S194 1/16 x 1-1/4 steel pin		.02
	1/4-20 x 5/16 socket screw	per C	7.25
	#78B brown outlet with cover		.16

FUSES

	2 Amp fuse	$ .08
	3 Amp fuse	.07
	5 Amp fuse	.06
	7-1/2 Amp fuse	.08
	10 Amp fuse	.05
	15 Amp fuse	.05
	1 Amp Slo-blo fuse	.30
	5 Amp Slo-blo fuse	.24
#4405	Fuse holder	.30

GOTTLIEB®

PRICE LIST

Arranged in Numerical Order

A-127	Formed switch blade	$ .08
A-139	Hinge assembly	1.90
A-154	Formed switch blade	.08
A-216	1st station relay mounting bracket	.50
C-252	Frame for large step-switch	6.50
A-255	Adjustable zero stop	.30
A-256	Drive arm zero stop	.12
A-257	Drive arm override stop	.12
A-262	Drive coil plunger	.56
A-264	Drive pawl spring	.06
A-265	Drive arm return spring	.08
A-266	Coil housing base	.60
A-267	Coil housing cover	.65
A-272	Reset arm plunger	.56
A-273	Subtract pawl	.24
A-274	Subtract pawl shoulder screw	.12
A-275	Subtract pawl spring	.07
A-276	Reset arm spring	.06
A-277(ST)	Coil mounting bracket, steel	.16
A-277(BR)	Coil mounting bracket, brass	.18
B-279	86 point gear	1.54
A-282	Ratchet switch insulator	.03
A-283	Main shaft	.40
A-284	Reset torsion spring	.40
A-295	Coil mounting bracket	.18
A-300	Reset lever shoulder screw	.08
A-303(SA)	Large wiper arm	2.10
A-303	Large wiper arm less fingers, bushings etc.	1.55
A-305	Wiper finger bushing	.08
A-306	Wiper finger	.05
A-307	Wiper finger spring	.03
A-308	Top step-switch mounting bracket	.22
A-324	Armature	.16
A-334	Shoulder pin	.05
A-347	Outside Barrel spring	.16
A-348	Shooter spring	.14
A-356	Die cast tilt bob	.50
A-357	Tilt bob wire	.08
A-358	Tilt bob striker	.40
A-359	Tilt bob support bracket	.20
A-362	Front cabinet armour plate	.60
A-375	Bank armature	.20
A-375(SA)	Bank armature with stainless steel rivet	.22
A-375A	Bank armature with fiber lifter	.40
A-416	Standard switch blade .008"	.06
A-417	Standard switch blade .010"	.06
A-418	Standard switch blade .012"	.06
A-419	Standard switch blade .016"	.06
A-420	Standard switch blade .020"	.06
A-451	Side lug	.08
A-452	Fibre lifter	.05
A-453	Fibre lifter	.05
A-454	Fibre lifter	.05
A-455	Fibre lifter	.05
A-456	Fibre lifter	.05
A-457	Fibre lifter	.06
A-458	Fibre lifter	.06
A-459	Fibre lifter	.06
A-460	Fibre lifter	.06
A-461	Fibre lifter	.06
A-462	Fibre lifter	.06
A-463	Switch blade separator 1/16	$ .02
A-464	Switch blade separator 1/32	.02
A-465	Switch cover plate	.03
A-466	Silver contact point	.06
A-468	Silver contact point	.03
A-471	Switch insulator tubing 5/32 to 5/8 lg. inclusive ea.	.03
	21/32 to 1-5/32 lg. inclusive ea.	.04
A-477	Fish paper blade	.03
A-548	Reset locking spring	.07
A-557	Coil frame	.78
A-561	Upper make blade and point	.22
A-562	Upper break blade and point	.22
A-563	Lower make blade and point	.22
A-564	Upper blade backing plate	.12
A-565	Flat head silver contact point	.05
A-574	Armature spring	.04
A-577	Flexible pigtail	.16
A-578	Lower break blade and point	.22
A-579	Silver washer	.03
A-590	Plunger spring	.06
A-634(SA)	Small wiper arm double row complete	1.90
A-634	Small wiper arm less wiper bushing finger, springs	1.40
A-645	Interlock coil mounting bracket	.20
A-647	Stud insulator 3/4	.04
A-681	Switch mounting bracket	.22
A-683	Plunger housing inside mounting plate	.16
A-727	Bank flap pin	.05
A-728	Bank armature spring	.04
A-729	Lock-in pawl spring, bank flap spring	.04
A-730	Spring adjustment clip	.06
A-743	Tilt switch weight	.20
A-779	Spring for bank overarm	.07
A-786	Formed switch blade	.08
A-818	Allen head "T" wrench	1.50
A-824	Shoulder screw	.12
A-825	Bushing for A-1848	.16
A-847	Spring for switch arm	.08
A-918	Formed switch blade	.08
A-945	Plastic hole cover	.12
A-951	"R" relay armature 1A	.80
A-952	"R" relay armature 2A	1.00
A-953	"R" relay armature 3A	1.55
A-954	"R" relay armature 4A	1.66
A-955	"R" relay armature 1B	.80
A-956	"R" relay armature 2B	1.00
A-957	"R" relay armature 3B	1.55
A-958	"R" relay armature 4B	1.66
A-959	"R" relay armature 1C	1.32
A-960	"R" relay armature 2C	1.55
A-961	"R" relay armature 1A-1B	1.45
A-962	"R" relay armature 1A-1C	1.45
A-963	"R" relay armature 2A-1B	1.65
A-964	"R" relay armature 1B-1C	1.45
A-968	Sub assembly, series bar 5	1.60
A-974	Cabinet push button bushing	.40
A-1009	Side moulding, left or right	2.00
A-1045	Ball lift rubber stop pad	.04
A-1049	Adjustable jam stop	.18
A-1050	Adjustable open end stop	.18
A-1051	Drive arm pawl	.24

COLLEGE

PRICE LIST

Arranged in Numerical Order

A-1052	Drive arm pawl spring		$ .06
A-1053	Drive arm return spring		.08
A-1056	Reset arm		.95
A-1058	Subtract pawl shoulder screw		.10
A-1059	Reset arm shoulder screw		.10
A-1060	Subtract pawl spring		.06
A-1061	Reset arm spring		.07
A-1069	Reset type 30 point gear and shaft		1.40
A-1070	Reset torsion spring		.40
A-1071	Wiper bushing washer		.04
A-1072	Wiper arm bushing		.22
A-1073	Ball lift return spring		.14
A-1076	Shoulder pin		.06
A-1083	Flat pin insulator		.04
A-1084	Coil		.90
A-1102	Drive coil housing base		.50
A-1103	Drive coil housing cover		.55
A-1114	Brass disc rivet	Per C	.50
A-1115	Disc and lug rivet	Per C	.50
A-1118	Coil		.80
A-1119	Coil		.80
A-1132	Brass armature rivet	Per C	.50
B-1167	15 ft. line cord		1.00
A-1168	3" bell shell		.80
A-1179	Shoulder pin		.05
A-1190	Drive coil plunger		.56
A-1195	Steel backing blade		.05
A-1215	"Pop" bumper switch blade and point		.26
A-1216	Bumper contact mounting bracket		.22
A-1217	Regular bumper skirt		.22
A-1218	"Pop" bumper plastic skirt		.22
B-1255	Frame – small step – switch		5.50
A-1279	Reset arm with pin for link		.95
A-1309	Rebound bracket only		.45
A-1309(SA)	Rubber rebound complete		.70
A-1311	Plunger stop and coil mounting bracket		.55
A-1316	Metal ring and shaft assembly		.66
A-1328	Ball hole kicker arm		1.00
A-1329	Coil plunger		.56
A-1330	Kicker arm return spring		.07
A-1338	Assembly of A-1056 with fibre insulator		1.22
A-1344	Large rebound rubber		.30
A-1345	Reset lock-in pawl		.45
A-1357	Adjustable zero stop		.12
A-1363	Lightbox socket (short)		.12
A-1402(SA)	Brass coil stop collar and nut		.35
A-1415	Fibre lifter		.04
A-1451	Motor switch dog		.16
A-1452	Switch dog bracket		.25
A-1453	Rollover wireform assembly		.18
A-1454	Rollover wireform assembly		.18
A-1455	Rollover wireform assembly		.18
A-1456	Rollover wireform assembly		.18
A-1470	Plastic shield		1.10
A-1494	Metal motor cam (1 top pin)		3.90
A-1495	Metal motor cam (no top pins)		3.85
A-1496	Coil		1.50
B-1507	Magnet relay frame		.56
A-1531	Metal shield 4-7/8" centers		.50
A-1547	Ball striker plate		.20
B-1553	Motor frame		7.50
A-1564	Gear and shaft		1.65
A-1567	Numbered replay wheel		$ 2.75
A-1572	Metal shield 6-1/4" centers		.55
A-1620	Target switch blade and silver point		.26
A-1636	Plunger return spring		.03
A-1671	Index pawl spring		.06
A-1672	Fibre lifter		.08
A-1680	Metal shield 3-5/16" centers		.38
A-1689	Coil and stop mounting bracket		.18
A-1691	Transformer		11.00
A-1698	Backing blade		.02
B-1751	Small step-switch frame		5.50
A-1756	Transformer		12.00
A-1804	Target, red-white-blue		.25
A-1805	Rollover wireform assembly		.22
A-1806	Rollover wireform assembly		.22
A-1807	Rollover wireform assembly		.22
A-1808	Rollover wireform assembly		.22
A-1826	Switch ground plate (steel)		.03
A-1843	Hex head shoulder screw		.14
A-1847	Bank set-up frame		.66
A-1848	Bank set-up arm		.66
A-1853	Formed switch blade		.08
A-1856	Coil		1.65
A-1912	Magnet relay arm spring		.10
A-1916	Metal shield 5-1/4" centers		.52
A-1954	Metal shield 3-5/8" centers		.40
A-1961	Metal cams		4.45
A-1965	Formed switch blade		.08
A-1968	Formed switch blade		.08
A-1969	Formed switch blade		.08
A-1983	Fibre lifter		.08
A-1999	Metal shield 3-1/8" centers		.35
A-2007	Large target (blue rings)		.25
A-2007(SA)	Target type switch assembly		1.35
A-2011	Drive arm shoulder screw, complete		.20
A-2012	Armature spring, relay bank		.05
A-2013	Small target (blue rings)		.20
A-2025	Pop star cap		.30
A-2040	Small oval head silver point		.03
A-2041	Relay silver point		.04
A-2042	Metal shield 2-1/2" centers		.30
A-2053	Kicker fulctrum		.16
A-2062	Small rollover insert		.30
A-2063	Small rollover button		.20
A-2064	Switch blade with point for rollover button		.26
A-2068	"1 point when lit" star pop bumper cap		.30
A-2075	Metal shield 6" centers		.60
B-2091	5" bell only		2.10
B-2091(SA)	5" bell with spacers and mountings		3.25
B-2091(SAC)	5" bell with coil assembly and plunger		7.00
A-2092	Reset lever		1.75
A-2113	Metal shield 4-1/4" centers		.45
A-2231	Metal shield 8-1/16" centers		.60
A-2238	Transformer		17.00
A-2294	Metal shield 4" centers		.40
A-2305	Lite shades (specify red, green or yellow)		.05
A-2357	Formed switch blade		.08
B-2369	Ball lifter only		1.00
A-2408	Nylon flipper shaft bushing		.30
A-2422	Metal shield 2-5/16" centers		.30
A-2426	Flipper shaft bushing nylon (cut)		.36
A-2428	Formed switch blade		.08

GOTTLIEB®

PRICE LIST

Arranged in Numerical Order

A-2437	Drive lever bushing	$ .20
A-2438	Drive pawl shoulder pin	.08
A-2439	Drive pawl shoulder pin	.08
A-2463	Bakelite backing blade	.03
A-2483	Contact kicker	1.10
A-2484	Subtract pawl	.40
A-2493	Wire gate	.15
A-2494	Gate switch rod	.15
A-2522	Bell arm	.55
A-2525	Metal shield 4-3/4" centers	.45
A-2540	Metal shield 5-1/8" centers	.50
A-2543	Wire form	.18
A-2544	Hole flap and wire form assembly	.55
A-2547	Cam link	.25
A-2569	Rubber contact kicker and plunger assembly	2.00
A-2574	Rubber contact kicker and plunger assembly	2.00
A-2585	Sub assembly of rollover wire	.22
A-2586	Sub assembly of rollover wire	.22
A-2592	Coin entrance plate 2 x 1 franc	.50
A-2596	Spacer	.14
A-2599	Plastic shield	1.75
A-2614	Bell coil mounting bracket	.45
A-2648	Rollover wire form assembly	.18
A-2649	Rollover wire form assembly	.18
A-2660	Fish paper blade	.04
A-2661	Slotted yoke (metal)	.14
A-2662	Insulated yoke (bakelite)	.25
A-2663	Plunger for "pop" bumper	.55
A-2694	Bakelite tip	.30
A-2695	Drive pawl	.25
A-2696	Step-up arm complete	2.30
A-2698	Reset lock-in pawl	.55
A-2700	Wire gate	.14
A-2721	Transformer	12.00
A-2728	Drive lever tip	.18
A-2733	Metal shield 2-1/4" centers	.35
A-2734	Metal shield 4-1/2" centers	.45
A-2766	Contact kicker	1.10
A-2785	Hole kicker	1.10
A-2786	Hole kicker	1.10
A-2820	Fibre reset link	.20
A-2825	Metal shield 1-1/2" centers	.22
A-2834	Target switch blade with silver point	.26
C-2844	Disc	14.00
C-2844	Wiper	2.10
A-2846	Plexible heavy pigtail	.18
A-2848	Step-up arm	1.45
A-2849	Step-up arm	1.45
A-2850	Step-up arm	1.85
A-2851	Step-up arm	1.85
D-2876(SA)	Front moulding (with hardware)	3.00
A-2905	Plastic shield	2.50
A-2913	Socket	.16
A-2914	Socket	.16
A-2915	Socket	.16
A-2916	Socket	.16
A-2968	Lite shades (specify red, green or yellow)	.06
A-2973	Key hanger	.10
A-2984	Shoulder screw	.12
A-2986	Step-up arm complete	1.75
A-2987	Step-up arm complete	$ 1.45
A-2988	Plunger	.60
A-2994	Metal shield 3-3/8" centers	.35
A-3024	Socket	.20
A-3025	Cellulose hole liner	.15
A-3026	Socket	.16
A-3027	"R" relay armature 1A, 1B, 1C	1.55
A-3028	Plunger with A-3029 fibre washer	.65
A-3030	Socket	.18
C-3032	Frame (2 step replay unit)	3.00
A-3053	Contact kicker	1.10
A-3054	Contact kicker	1.10
A-3055	Contact kicker	1.10
A-3056	Contact kicker	1.10
A-3058	Target switch blade with silver point	.26
A-3060	Metal shield adjustable	.35
A-3086	Ball stop base assembly	2.25
A-3107	Center shaft stud	.30
A-2112	Plunger	.60
A-3113	Adjustable jam stop	.35
A-3115	Adjustable drive stop	.40
A-3118	Switch finger	.10
A-3124	Terminal strip with lugs	.30
A-3128	Switch blade with finger and point	.18
A-3129	Switch blade with finger and point	.18
B-3134	Numbered drum	2.75
C-3136	Frame 10 step unit	5.00
A-3137	Unit mounting slide	.22
A-3140	Socket	.10
A-3142	10 step unit mounting shelf, bottom, 3 unit or 6 unit, with lamps	6.50
A-3144	10 shelf unit mounting shelf, top, 3 unit or 6 unit with lamps	6.50
A-3145	Drive pawl spring	.10
A-3146	Socket	.10
A-3150	Side moulding, left or right	2.30
A-3167	Front moulding only	4.00
D-3167(SA)	Front moulding with hardware	6.00
A-3179	Flipper button wire	.22
A-3180	Flipper button wire	.22
A-3185	Moulding hookeye (right)	.60
A-3186	Moulding Hookeye (left)	.60
A-3187	Front moulding hook	.35
C-3195	Front moulding latch strip	1.10
A-3198	Latch lever door bracket	.14
A-3205	Plastic shield	1.75
A-3207	Metal shield 4-1/8" centers	.45
A-3208	Metal shield 2" centers double aprons	.45
A-3210	Hole flap and wire form	.55
A-3230	Coil mounting with A-594 stop	.35
A-3232	Ball stop plunger spring	.10
B-3233	Armour plate	1.10
B-3234	Armour plate	1.10
A-3235	Transformer	12.00
C-3244	Wiper	3.20
A-3246	Hub wire form	.16
A-3257	Plastic shield	1.60
A-3287	Arch gate only	.30
A-3288	Gate spring only	.25
A-3289	Gate pin only	.05
A-3290	Arch gate assembly	.65
A-3299	Auto former	15.00

COTTLEB®

PRICE LIST

Arranged in Numerical Order

A-3309	Formed switch blade	$ .08
A-3319	Plastic target #20	.30
A-3320	Plastic target #30	.30
A-3321	Plastic target #40	.30
A-3322	Plastic target #50	.30
A-3328	Flipper return spring (left)	.50
A-3329	Flipper return spring (right)	.50
A-3336	Shoulder pin	.10
B-3350	Socket	.20
B-3368	Hinge assembly complete	3.50
A-3369	Plastic target #10	.20
A-3395	Flipper link	.25
A-3396	Flipper link and plunger	.90
A-3399	Flipper lever arm	.56
A-3400	Flipper lever arm	.56
A-3401	Flipper link and plunger	1.75
A-3402	Flipper link arm and plunger	1.75
A-3408	Contact kicker coil and bracket assembly	2.75
A-3409	Contact kicker coil and bracket assembly	2.75
A-3420	Motor cam assembly	3.95
A-3421	Formed switch blade	.08
B-3423	Bank set-up assembly	6.60
A-3425	Hole flap assembly	.55
A-3446	Knocker bracket assembly only	.80
B-3489	5" bell coil assembly only	3.50
A-3498	Coil	.90
A-3558	Bell coil mounting bracket	.45
A-3559	3" bell mounting strip only	.45
A-3561	Socket	.16
A-3562	Flipper button	.50
A-3587	3" bell coil assembly	2.75
A-3591	Assembly of A-5143 coil and mounting brackets	2.75
A-3593	Glass support bushing with mounting screw	.12
A-3594	Transformer	12.00
A-3598	5" bell coil mounting	1.00
A-3608	Wiper arm double row less fingers, hubs, springs	1.40
A-3667	Target switch blade with silver point	.26
A-3673	Metal shield 2" centers single apron	.30
B-3689	Wiper	2.50
B-3717	Motor frame	7.50
A-3718	Plastic shield	2.00
B-3729	Disc	2.25
A-3739	Diamond target button cut-off	.40
A-3740	Spade target button cut-off	.40
A-3741	Club target button cut-off	.40
A-3742	Heart target button cut-off	.40
A-3748	Metal shield 5" centers	.50
D-3768	Metal leg	3.00
A-3775	3/8-16 x 2-3/8 leg mounting bolt	.12
A-3788	Outer painted target arm	.80
A-3810	Metal shield 2" centers single apron	.35
A-3811	Retaining clip	.06
B-3854	Arch ball deflector	.70
B-3866	Disc	3.75
B-3869	Plastic shield	1.90
A-3889	Cigarette holder	.40
A-3890	Coil	1.65
A-3891	Coil	.90
A-3896	Nylon bushing	.12
A-3898	Coil stop and mounting	.75
C-3914	Disc	14.00
C-3914	Wiper	$ 2.10
A-3918	Lightbox mounting bolt washer	.04
A-3920	Ball lift washer	.10
A-3921	Ball lift spring	.10
A-3923	Ball lift rod bushing assembly	.65
A-3927	Flipper button shield	.50
A-3950	Spring	.06
A-3985	Plastic shield	3.00
A-3987	Metal shield 5-3/8" centers	.50
A-4051	Plastic shield	2.50
A-4071	Stainless steel armature rivet ..... Per C	.90
A-4076	Metal shield 3" centers single apron	.40
A-4100	Plastic shield	1.90
A-4103	Plastic shield	3.00
C-4128	Interlock relay frame	.65
A-4184	Drive pawl lift	.20
A-4185	Stop pawl lift	.20
A-4186	Drive pawl for A-4272 drive arm	.30
A-4188	Guide bracket	.70
A-4189	Metal shield 6-9/16" centers	.60
A-4190	Stop pawl shoulder bearing	.10
A-4191	Drive pawl shoulder pin	.20
A-4194	15 tooth ratchet and shaft	2.25
C-4197	Disc	14.00
C-4197	Wiper	2.10
B-4228	Numbered free play wheel (5–10)	2.75
A-4231	Metal shield 2-11/16" centers	.30
A-4263	Push button switch link assembly	.45
A-4264	Push button switch link assembly (left)	.45
A-4265	Push button switch assembly (right)	.45
A-4267	Motor cam	4.00
A-4268	Plastic target #100	.30
A-4269	Plastic target #300	.30
A-4271	Ball strike plate and blade	.90
A-4272	Drive lever	2.00
B-4273	Disc and strike plate switch	7.90
C-4275	Frame – roto unit	5.50
A-4276	Transformer	10.50
A-4277	Transformer	13.00
B-4278	Ball stop assembly	7.50
A-4281	Ball count strip decal	.02
A-4282	30 tooth gear and shaft (cut off)	1.30
A-4330	Socket	.08
D-4337	Steel leg	3.00
A-4343	Card target "J"	.55
A-4345	Target blade only	.10
A-4346	Backing plate for roto unit	.10
A-4349	Metal shield 3" centers	.30
A-4365	Plastic shield	1.20
A-4374	Switch arm limit plate	.08
A-4377	5¢ coin entrance plate	.40
A-4378	10¢ coin entrance plate	.40
A-4379	25¢ coin entrance plate	.40
A-4380	Blank return hole face plate	.40
A-4383	Cash box lock eye	.26
A-4386	Reject rod	.50
B-4391	Coin feed through	1.00
B-4392	Coin feed through cover	.90
B-4395	Coin return turnaround	.50
C-4398	Rejector saddle with A-4386 reject rod, A-4416 reject arm, cable and SW's	9.60
A-4400	5¢ or 10¢ coin switch arm	.25

GOTTLIEB®

PRICE LIST

Arranged in Numerical Order

A-4401	25¢ coin switch arm	$ .25
A-4413	Blank coin entrance plate	.40
A-4414	Black 3" bell shell	.80
A-4416	Reject arm	.80
A-4417	Coin return through	1.50
A-4420	Relay bank flap assembly	.56
A-4429	2A – 2B armature assembly complete	1.74
A-4430	Wiper, 10 step unit, two point	.40
A-4431	Wiper, 10 step unit, 1 point	.40
B-4456	Disc	3.75
B-4457	Disc	3.75
B-4479	Disc	4.00
B-4479	Wiper	1.90
A-4481	Rollover wireform assembly	.22
A-4494	Arch hole liner	1.00
A-4515	Contact adjuster	.40
B-4519	Disc	3.00
B-4520	Disc	3.00
B-4521	Wiper	2.50
A-4524	Metal red push button	.25
A-4525	Door stop	.30
A-4526	Door mounting strip	.25
C-4528	Front door trimming, deluxe cabinet	1.20
C-4529	Front door trimming, regular cabinet	1.20
C-4537	Metal cabinet door, single chute	4.00
C-4538	Metal cabinet door, double chute 4-1/2" centers	4.30
C-4539	Metal cabinet door, double chute 7-5/8" centers	4.30
C-4540	Metal door – single chute	4.00
A-4546	Nylon ball lift bushing	.75
A-4547	Kick switch rod 1-7/8" long	.15
A-4548	Kick switch rod 2-1/8" long	.15
A-4549	Kick switch rod 2-3/8" long	.15
A-4550	Cash box	.60
C-4559	Armour plate front	.55
C-4564	Banana cut liner	1.50
A-4566	Plastic shield	1.50
A-4567	Plastic shield	1.50
A-4568	Metal shield	.45
A-4569	Plastic shield	1.50
C-4580	Disc	6.00
A-4582	Coil stop and mounting	.75
A-4583	Drive coil housing with stop	1.05
A-4584	Drive coil housing with stop	1.10
A-4585	8-32 x 1" carriage bolts	.07
A-4586	8-32 x 1-1/8" carriage bolt	.07
A-4588	Coil mounting bracket and stop	.45
A-4589	Drive coil housing with stop	1.25
A-4590	Drive coil housing with stop	1.30
A-4591	Metal shield 3-1/2" centers double aprons	.45
A-4592	Plastic target #1	.30
A-4593	Plastic target #2	.30
A-4594	Plastic target #3	.30
A-4595	Plastic target #4	.30
A-4596	Plastic target #5	.30
C-4597	Wiper and target assembly	15.00
A-4617	Connection insulator	.08
A-4629	2A–1B–1C armature assembly complete	1.87
A-4631	Score card protector	.12
A-4632	Score card protector	.08
A-4633	Score card protector	.06
A-4634	"Z" coil mounting bracket with stop	$ .80
B-4636	Disc	3.75
C-4653	Cash box	1.65
A-4664	Arch stick protector	.30
A-4670	Latch lever	.80
A-4671	Terminal lug	.02
A-4704	Plastic shield	2.25
A-4705	Metal shield – rollunder	.50
A-4706	Rollunder gate wire form	.20
A-4708	Card target "2"	.55
A-4709	Card target "3"	.55
A-4719	8-32 x 1-1/4" carriage bolt	.08
A-4726	Allen head "T" Wrench	1.50
A-4733	Card target "2"	.55
A-4734	Card target "3"	.55
A-4735	Card target "4"	.55
A-4736	Card target "5"	.55
A-4737	Card target "6"	.55
A-4738	Card target "7"	.55
A-4739	Card target "8"	.55
A-4740	Card target "9"	.55
A-4741	Card target "10"	.55
A-4742	Card target "J"	.55
A-4743	Card target "K"	.55
A-4744	Card target "A"	.55
A-4745	Card target "stripes"	.55
A-4746	Card target "stripes"	.55
A-4747	Metal shield 4-5/8" centers	.45
A-4748	Metal shield adjustable	.60
A-4749	Metal shield 6-1/2" centers	.60
A-4751	Plastic shield with sockets	3.80
A-4752	Plastic shield	3.00
A-4753	Metal shield	2.40
C-4755	Wiper and targets	17.50
A-4758	Lightbox insert hinge pivot	.30
A-4759	Lightbox insert hinge pin	.30
A-4762	Socket	.16
D-4766	Score card holder (large cabinet)	6.00
D-4769	Score card holder (small cabinet)	6.50
C-4770	Hub nylon	.40
A-4771	Hub ground wire	.08
A-4772	Metal shield	1.00
A-4774	Metal shield, adjustable	.60
B-4783	Plastic shield	3.00
C-4790	Disc	5.75
C-4792	Wiper and targets	15.00
B-4795	Disc	3.00
C-4799	Wiper	3.20
C-4800	Disc	5.00
A-4802	Tilt bob wire assembly	.64
C-4805	Radius arch channel	1.10
D-4806	Radius arch plate cover (state color and game)	2.45
D-4807	Radius arch plate track-plated	1.60
A-4811	Switch cover plate, 3/8" centers	.03
D-4820	Metal lightbox door (small cabinet)	6.50
D-4825	Metal lightbox door (large cabinet)	7.00
A-4829	Rollunder gate spring	.10
A-4833	Wire form ball guide rail	.30
A-4835	Card target "20"	.55
A-4836	Card target "30"	.55
A-4837	Card target "40"	.55

©TILT

PRICE LIST

Arranged in Numerical Order

A-4838	Card target "50"	$ .55
A-4839	Card target "star"	.55
C-4840	Wiper and targets	17.50
C-4841	Disc	10.50
A-4853	Lightbox insert lock stop plate	.20
A-4854	Lightbox insert lock shoulder bushing	.08
B-4858	Lightbox insert lock lever (small cabinet)	.80
B-4859	Lightbox insert lock lever (small cabinet)	.80
B-4860	Lightbox insert lock lever(large cabinet)	.90
B-4861	Lightbox insert lock lever (large cabinet)	.90
A-4862	Coil stop with aluminum nut	.52
A-4863	Coil stop with steel nut	.50
A-4864	Metal shield 2-3/4" centers (single apron)	.35
A-4865	Plastic shield	2.40
A-4866	Plastic shield	2.00
A-4867	Metal shield	.30
A-4868	Metal shield	.30
A-4869	Metal shield	.55
A-4871	Card target "100000"	.55
A-4872	Card target "200,000"	.55
A-4873	Card target "500,000"	.55
A-4874	Card target "1 Million"	.55
B-4876	Metal shield	2.40
C-4878	Wiper and targets	17.50
C-4880	Disc	5.00
C-4881	Wiper	3.20
C-4882	Disc	7.50
A-4883	Metal shield	.40
A-4887	3A, 1B armature assembly complete	1.70
A-4888	Kicking plunger	1.10
A-4889	Shoulder pin	.15
A-4890	Shoulder pin	.15
A-4891	Metal cam	4.60
A-4893	Coil	1.65
A-4896	Plastic shield	2.40
A-4898	Metal shield 1-13/16" centers single apron	.30
A-4899	Metal shield 1-13/16" centers double apron	.35
A-4900	Metal shield 1-13/16" centers double apron	.35
A-4901	Metal shield 1-13/16" centers double apron	.35
C-4902	Wiper and targets	17.50
C-4904	Disc	5.90
C-4905	Wiper	3.50
C-4906	Disc	10.00
A-4907	Lug rivet Per C	.50
A-4908	Metal shield 2-3/8" centers double apron	.40
A-4909	Metal shield 3-1/2" centers single apron	.35
A-4916	Ball elevator shaft	.12
A-4918	Ball lift bracket and shaft assembly	1.50
A-4923	Plastic shield	2.40
A-4924	Metal shield 5-1/2" centers	.40
A-4925	Metal shield 5-7/8" centers	.40
A-4926	Metal shield 7-1/32" centers	.50
A-4929	Card target "1/9"	.55
A-4930	Card target "2"	.55
A-4931	Card target "3"	.55
A-4932	Card target "4/12"	.55
A-4933	Card target "5"	.55
A-4934	Card target "6"	.55
A-4935	Card target "7/15"	.55
A-4936	Card target "8"	.55
A-4937	Card target "10"	.55
A-4938	Card target "11"	.55
A-4939	Card target "13"	.55
A-4940	Card target "14"	$ .55
A-4941	Drive lever with switch arm	2.20
B-4943	Pool balls, complete set	12.00
C-4944	Wiper and targets	17.50
C-4945	Disc	6.75
C-4946	Disc	10.50
C-4947	Wiper	4.00
A-4949	Pop bumper coil and mounting bracket assembly	4.50
A-4958	Rollover wire assembly	.30
A-4959	Rollover wire assembly	.30
A-4960	Rollover wire assembly	.30
A-4961	Rollover wire assembly	.30
A-4963	Motor cam assembly	4.05
A-4965	Armature spring, magnet relay	.06
A-4966	Metal shield 2-1/2" centers double apron	.40
A-4968	Card target "9/1"	.55
A-4969	Card target "12/4"	.55
A-4970	Card target "15/7"	.55
C-4971	Disc	14.00
C-4971	Wiper	2.10
A-4977	1/16" switch blade separator	.02
A-4978	3/64" switch blade separator	.02
A-4979	Override blade retainer	.02
A-4980	Override blade spacer	.02
A-4981	Switch cover plate 1/4" covers	.04
A-4982	Switch insulator tubing	.02
A-4983	.008 switch blade	.06
A-4983	.008 switch blade with A-466 point	.12
A-4983	.008 switch blade with A-2040 point	.09
A-4983	.008 switch blade with A-5334 & A-5335 point & washer	.13
A-4984	.010 switch blade	.06
A-4984	.010 switch blade with A-466 point	.12
A-4984	.010 switch blade with A-2040 point	.09
A-4985	.008 lock-in blade	.06
A-4985	.008 lock-in blade with A-2040 point	.09
A-4986	.008 override blade	.05
A-4987	Lock-in backing blade	.02
C-4989	"AG" relay housing	.80
A-4994	Coil and mounting bracket assembly	3.75
A-4995	Metal shield	.60
A-4996	Metal shield	.60
A-4997	Metal shield	.60
A-4998	Metal shield 6-5/8" centers	.40
B-5006	Disc	5.10
B-5006	Wiper	1.90
A-5009	Metal shield	.60
A-5010	Metal shield, adjustable	.60
A-5013	Contact kicker	1.10
C-5022	Disc	14.50
C-5022	Wiper	2.10
C-5023	Disc	6.00
A-5024	Flipper stop bracket	.30
C-5027	Wiper	17.50
C-5028	Ball lift complete	3.50
A-5030	Plastic shield	1.60
A-5032	Metal shield	.65
A-5033	Metal shield	.70
A-5034	Flipper link	.35
C-5035	Wiper	4.60
C-5036	Disc	7.75

GOTTLIEB®

PRICE LIST

Arranged in Numerical Order

C-5038	Disc	$ 8.00
C-5039	Wiper and targets	15.00
A-5061	Nylon plunger tip	.16
A-5063	Plunger, lightbox bell	.66
A-5064	Plastic slip in core 1-21/32"	.22
A-5065	Plastic slip in core 1-7/8"	.20
A-5067	Plastic shield	2.00
A-5068	Card target "1"	.55
A-5069	Card target "3"	.55
A-5070	Card target "4"	.55
A-5071	Card target "5"	.55
A-5072	Card target "6"	.55
A-5073	Card target "7"	.55
C-5074	Wiper and targets	17.50
C-5077	Disc	7.50
A-5081	Spring	.05
A-5082	Card target "300,000"	.55
B-5083	Plastic shield	2.80
C-5085	Disc	14.50
C-5085	Wiper	2.10
C-5086	Disc	4.50
C-5087	Disc	5.00
B-5088	Wiper	3.00
B-5089	Disc	3.65
A-5093	Plastic flipper, vertical lettering	.20
A-5094	Plastic flipper, horizontal lettering	.20
A-5095	Plastic flipper, horizontal lettering	.20
A-5098	Metal shield 5-1/2" centers	.35
A-5108	Rivet (Br.) Per C	.50
A-5109	Metal shield, rollunder	.40
A-5119	Plastic shield	1.80
A-5120	Plastic shield	1.90
A-5122	Metal shield 3-7/8" centers	.40
B-5131	Disc	3.00
B-5132	Disc	4.50
B-5132	Wiper	1.90
B-5133	Disc	3.00
A-5136	Plastic target button cut off (specify color)	.20
A-5139	3A, 1C armature assembly complete	1.70
A-5141	Coil	1.65
A-5142	Plastic slip in core 2-3/4"	.20
A-5143	Coil	1.65
A-5146	Coil stop mounting bracket	.25
A-5147	Flipper coil mounting bracket	.25
A-5148	Flipper coil mounting bracket	.45
A-5152	Metal shield 3-3/4" centers	.40
A-5153	Metal shield	.80
A-5154	Metal shield	.80
A-5155	Flat ratchet spring	.20
A-5160	Ball hole kicker arm	.65
A-5161	Ball hole kicker arm	.65
C-5166	Screened back drop panel	3.65
C-5167	Frame, sub assembly	5.50
B-5168	Disc	6.25
B-5168	Wiper	1.90
A-5171	Plastic slip in core 1-19/32"	.20
A-5172	Plastic slip in core 2-1/2"	.20
A-5177	Drive index pawl assembly	.25
A-5178	Plastic shield	3.00
A-5179	Switch mounting bracket	.20
A-5180	Ratchet spring retainer	.30
A-5185	Gear and shaft assembly	$ 1.40
C-5186	Animation wiper	8.00
A-5187	Switch cam assembly	2.80
A-5189	Coil and stop mounting bracket	.85
A-5190	Assembly of A-5141 coil and mounting bracket	4.00
A-5191	Assembly of A-5141 coil and mounting bracket	4.00
A-5193	Coil	1.40
A-5194	Coil	1.65
A-5195	Coil	1.95
A-5196	Coil	2.20
A-5197	Coil	1.95
B-5198	Knocker assembly	4.50
B-5200	Knocker bracket	.80
A-5201	1" diameter plastic target button (specify color)	.20
A-5204	Metal shield	.30
B-5209	Disc	5.00
B-5209	Wiper	1.90
B-5210	Disc	5.00
B-5210	Wiper	1.90
C-5211	Wiper	3.65
C-5213	Disc	5.65
A-5217	1" diameter bullseye target button	.25
A-5218	Metal shield adjustable	.30
A-5219	Light shield	.20
C-5221	Plastic shield	4.00
B-5226	Disc	3.00
A-5231	Latch lever stop	.40
A-5232	Drive lever assembly	1.85
A-5240	Rubber grommet	.03
A-5242	Reset lever assembly	.75
C-5245	Wiper	17.50
A-5246	Plunger washer	.02
A-5250	Plastic shield	1.65
A-5251	Metal shield 1-1/8" centers	.25
B-5252	Plastic shield	2.35
C-5253	Disc	5.00
C-5253	Wiper	1.90
B-5254	Disc	4.00
B-5254	Wiper	1.90
A-5255	Nylon lifter	..04
A-5256	Nylon lifter	.04
A-5257	Nylon lifter	.04
A-5258	Nylon lifter	.04
A-5259	Nylon lifter	.04
A-5260	Nylon lifter	.04
A-5261	Nylon lifter	.04
A-5262	Nylon lifter	.04
A-5263	Nylon lifter	.04
A-5264	Nylon lifter	.04
A-5271	Plastic shield	1.80
A-5273	Plastic shield	2.10
B-5274	Disc	4.00
B-5275	Disc	3.75
B-5276	Disc	4.50
B-5276	Wiper	1.90
B-5277	Transformer 110-120 V.	Price on Application
C-5278	Wiper and targets	17.50
A-5279	Card target "10"	.55
A-5281	"1100" score to beat plastic card	.50

COTTLER

PRICE LIST

Arranged in Numerical Order

A-5282	"1200" score to beat plastic card	$ .50
A-5283	"1300" score to beat plastic card	.50
A-5284	"1400" score to beat plastic card	.50
A-5285	"1500" score to beat plastic card	.50
A-5291	Flipper and shaft assembly	.90
A-5292	Flipper and shaft assembly	.90
A-5293	Flipper and shaft assembly	.90
A-5294	Coil	1.65
C-5303	Animation wiper	4.60
A-5305	Assembly of A-5194 coil and mounting bracket	3.75
A-5309	Ball roll tilt	2.80
A-5313	Plastic shield	1.50
A-5314	Plastic shield	1.60
B-5317	Disc	3.25
B-5317	Wiper	1.90
C-5318	Wiper and targets	17.50
C-5321	Disc	7.25
C-5322	Wiper	4.60
C-5323	Disc	7.20
A-5325	Ball elevator return spring	.10
C-5326	Ball elevator fulcrum	1.25
C-5327	Ball elevator cam	1.75
A-5329	Plastic shield	1.60
A-5330	Plastic shield	1.50
C-5331	Ball elevator assembly	3.50
A-5334	Silver contact washer	.03
A-5335	Silver contact point for A-5334	.04
A-5336	Adjustable metal shield	.25
A-5337	Flat rail	.80
B-5339	Disc	6.25
B-5339	Wiper	1.90
A-5341	Vibration damper for coil chute switch	.70
A-5350	Plastic shield	2.00
C-5354	Disc	5.25
A-5362	Vibration dmper and coin chute switch	1.45
A-5363	Relay switch stack	.50
A-5364	Relay switch stack	.44
A-5365	Relay switch stack	.44
A-5366	Relay switch stack	.44
A-5367	Relay switch stack	.44
A-5368	Relay switch stack	.66
A-5369	AG relay armature and insulator arm	.40
A-5370	AG relay armature and insulator arm	.42
A-5380	Replay adjustment screw insulator	.04
A-5383	Gear assembly	1.54
A-5384	Gear assembly	1.54
A-5385	Gear assembly	1.54
A-5386	Gear assembly	1.54
A-5387	Gear and shaft assembly	1.70
A-5388	Gear and shaft assembly	1.70
A-5389	Gear and shaft assembly	1.70
A-5390	Gear assembly	1.54
A-5391	Flipper A-5093 and shaft assembly	.80
A-5392	Flipper A-5094 and shaft assembly	.80
A-5393	Flipper A-5095 and shaft assembly	.80
A-5394	Gear and shaft assembly	1.40
A-5395	Gear and shaft assembly	1.40
A-5396	Plastic shield	1.30
A-5397	Metal shield 7-5/16" centers	.55
A-5404	Gear and shaft assembly	1.60
A-5416	Gear and shaft assembly	1.40
A-5417	Gear and shaft assembly	$ 1.40
A-5418	Gear and shaft assembly	1.40
A-5419	.010 feeler gauge for setting point gap	.12
A-5420	.019 feeler gauge for setting point gap	.12
A-5457	Interlocking relay coil	.90
A-5458	Cash box divider	.50
C-5459	Cash box cover	1.50
D-5460	Cash box	3.50
A-5461	Gear and shaft assembly	1.40
A-5462	Gear and shaft assembly	1.40
A-5463	Gear and shaft assembly	1.40
A-5464	Gear and shaft assembly	1.40
A-5465	Gear and shaft assembly	1.70
A-5466	Plastic shield	1.50
A-5467	Plastic shield	1.50
A-5468	Metal shield 2-7/8" centers	.35
A-5469	Metal sheild 3-7/16" centers	.40
A-5470	Wiper	1.90
B-5477	Disc	5.00
B-5478	Disc	3.75
A-5479	Vent hole cover	.10
A-5487	Drive lever assembly	1.85
C-5491	Wiper	10.80
A-5492	Motor cam assembly	4.00
A-5508	Card target "10"	.55
A-5509	Card target "20"	.55
A-5510	Card target "30"	.55
A-5511	Card target "40"	.55
A-5512	Card target "50"	.55
A-5513	Flat head disc rivet	Per C .50
A-5529	Plastic shield	1.25
A-5530	Plastic shield	1.20
A-5536	.010 formed switch blade w/A-2040 point for AG relay	.10
A-5538	Wiper	1.90
A-5539	Disc	1.75
C-5540	Animation wiper	4.80
A-5542	Adjustable metal shield	.35
A-5556	Coil terminal insulator	.06
A-5558	Coil stop and mounting bracket	.82
A-5559	Strike plate	.30
A-5569	Metal shield 4-1/4" centers	.45
A-5571	Plastic shield	1.10
A-5572	Plastic shield	1.90
A-5574	Card target "1"	.55
A-5575	Card target "1"	.55
A-5576	Card target "2"	.55
A-5577	Card target "2"	.55
A-5578	Card target "3"	.55
A-5579	Card target "4"	.55
A-5580	Card target "4"	.55
A-5581	Card target "5"	.55
A-5582	Card target "5"	.55
A-5583	Card target "100"	.55
A-5584	Metal light shield	.20
C-5586	Plastic shield	3.80
C-5587	Wiper and targets assembly	17.50
C-5588	Disc	5.50
C-5589	Wiper	3.60
C-5591	Disc and striker plate assembly	8.00
C-5593	Animation wiper	5.20
A-5594	Wiper	2.10

GOTTLIEB®

PRICE LIST

Arranged in Numerical Order

C-5595	Disc	$14.50
A-5596	Wiper	1.90
A-5597	Wiper	1.90
B-5598	Disc	4.50
A-5613	Metal shield 4-3/4" centers	.50
C-5614	Plastic wheel bumper cap	3.40
A-5615	Mercury switch arm	.30
A-5616	Switch blade rivet – 10 step unit .... Per C	.50
A-5617	Plastic shield	1.50
A-5618	Metal shield 8-1/16" centers	.70
A-5619	Hollow post stud	.30
B-5620	Wiper	2.55
B-5621	Disc	3.60
A-5622	Wiper	1.90
C-5623	Disc	6.95
B-5624	"Play again" replay wheel	2.75
A-5625	Metal shield	.40
A-5634	Formed switch blade	.06
A-5637	Formed plastic shield 5-5/16" centers	.40
A-5639	Brazed drive lever	2.25
A-5640	Plastic shield	1.90
C-5645	Disc	14.50
A-5652	Dancer assembly	4.50
A-5654	Dancer actuating armature	.60
A-5655	Dancer coil housing	.60
C-5656	Dancer mounting frame	4.50
C-5657	Complete dancer unit	12.50
A-5662	Coil	.90
A-5665	Insert hinge pivot bracket with cutout	.35
B-5676	Plastic shield	2.60
A-5682	Formed plastic shield 8" centers	.40
A-5684	Ball kicker	1.10
A-5685	Ball kicker coil link 2-1/4" centers	.30
A-5686	Metal shield with apron	1.00
A-5687	Metal shield with apron	.30
C-5689	Wiper and target assembly	17.50
D-5691	Ball trough	3.00
C-5693	Disc and strike plate assembly	7.25
A-5701	"1000" score to beat plastic card	.50
A-5702	Metal shield 4" centers	.40
A-5703	Plastic shield	.90
A-5713	Plastic shield	1.00
A-5714	Plastic shield	1.75
A-5715	Plastic shield	1.75
A-5723	Hole kicker coil	1.65
A-5724	Plastic shield	1.90
A-5726	Gear and shaft assembly	1.50
A-5727	"900" Score to beat plastic card	.50
C-5738	Wiper	3.60
C-5739	Disc	6.50
C-5740	Wiper	3.85
C-5741	Disc	5.75
A-5743	Connection insulator	.02
A-5745	Mini-post with rebound rubber	.26
A-5746	Former plastic shield 4-1/2" centers	.40
A-5747	Plastic shield	.50
A-5748	Card target "10"	.55
A-5749	Card target "20"	.55
A-5750	Card target "30"	.55
A-5751	Card target "10"	.55
A-5752	Card target "20"	.55
A-5753	Card target "30"	.55
C-5755	Wiper and target assembly	$17.50
B-5756	Disc	3.50
C-5757	Disc	7.90
B-5760	Plastic shield with sockets	4.20
A-5768	Target blade	.10
B-5769	3" black bell assembly	5.50
B-5770	3" plated bell assembly	5.50
A-5773	Plastic shield	2.40
A-5777	"Rabbit" target assembly	2.75
B-5778	Plastic shield	2.80
C-5787	Wiper	3.65
C-5788	Disc	6.25
A-5792	Disc	1.25
A-5796	Flipper link	.50
A-5798	Trough rollover wire assembly	.22
A-5799	Kicker coil and mounting assembly	4.00
A-5803	2A-2C armature assembly complete	1.74
A-5805	Gear and shaft assembly	1.75
A-5808	Plastic shield	1.15
A-5809	Plastic shield	1.35
A-5810	Metal shield with aprons 3-1/16" centers	.45
A-5811	Wiper	1.90
A-5817	Revolving bumper cap wiper	.80
A-5819	Revolving bumper cap motor	10.80
B-5824	Revolving cap plastic shield	8.75
B-5834	Disc	3.90
C-5835	Disc	4.00
A-5844	Bayonet socket	.30
A-5853	Transformer	19.80
A-5857	Flipper link – bakelite 2-1/4" centers	.30
A-5858	Flipper link and plunger assembly	.86
A-5859	Flipper link, plunger and lever assembly	1.50
A-5860	Flipper link, plunger and lever assembly	1.50
A-5861	Gear and shaft assembly	1.50
A-5864	Plastic shield	1.80
A-5865	Plastic shield	1.95
A-5866	Plastic shield	1.35
A-5868	Target assembly	3.75
B-5873	Disc	4.00
C-5874	Wiper	3.70
C-5875	Disc	6.80
A-5877	Ground blade and point	.09
A-5886	Grounding wiper and point	.40
A-5887	Plastic shield	1.40
A-5888	Plastic shield	1.85
A-5889	Plastic shield	1.60
A-5890	Formed plastic shield 6-1/2" centers	.40
C-5901	Ten step unit mounting shelf top 4 unit	6.50
C-5902	Ten step unit mounting shelf bottom 4 unit	6.50
C-5904	Score card holder	6.00
A-5905	Wiper	1.90
A-5906	Wiper	1.90
A-5907	Disc	1.40
A-5908	Disc	1.35
B-5909	Disc	4.85
B-5910	Disc	3.00
A-5912	Cigarette holder	.60
B-5918	Model "SS" ball plunger assembly	4.25
A-5919	Ball plunger assembly – large cabinet	4.75
A-5920	Model "SS" ball plunger shaft and knob	1.90
A-5921	Ball plunger shaft and knob – large cabinet	2.22
A-5922	Plastic shield	1.30

©PILER

PRICE LIST

Arranged in Numerical Order

A-5923	Plastic shield	$ 1.75
A-5926	Coil stop and bracket assembly	.80
A-5927	Ball check assembly	4.50
A-5929	Ball rest	.50
A-5930	Flat rail	.30
A-5932	Rollover wire assembly	.30
A-5934	Rollover wire assembly	.30
C-5939	Formed plastic shield "100 points"	4.00
A-5948	10¢ – 3 for 25¢ label	.08
A-5949	10¢ – 4 for 25¢ label	.08
A-5950	5¢ – 5 for 25¢ label	.08
A-5951	Disc	1.45
A-5952	Brazed drive lever	2.00
C-5954	Front door trimming - single chute games	1.20
B-5959	Ball lifter rod assembly	2.80
A-5964	Ball lift rod and knob assembly	1.06
A-5974	"Rabbit" target arm	.80
A-5975	"Duck" target arm	.80
A-5976	"Duck" target assembly	2.75
A-5980	Flipper link 2-1/4" centers	.40
A-5981	Flipper link 5-7/32" centers	.55
A-5982	Flipper lever arm	.56
A-5983	Flipper lever arm	.56
A-5984	Flipper pivot assembly	.70
A-5985	Flipper pivot assembly	.70
B-5986	Wiper	4.00
B-5987	Disc	3.50
A-5991	Plunger for ball stop	.90
A-5992	Motor cam assembly	3.95
D-5993	Model "SS" cabinet	69.50
D-5994	Model "SS" pedestal	2.80
D-5995	Model "SS" lightbox	26.00
D-6019	Motor cam assembly	3.95
D-6025	Model "SS" lightbox door	6.75
A-6026	Model "SS" right corner trim	2.25
A-6027	Model "SS" left corner trim	2.25
D-6031	Model "SS" front moulding assembly	9.50
A-6032	Flipper link and plunger 5-1/2" centers	1.06
A-6033	Flipper link arm and plunger 5-1/2" centers	1.65
D-6034	Model "SS" right side stainless moulding	9.50
D-6035	Model "SS" left side stainless moulding	9.50
D-6038	Model "SS", SS3, SL and SL2 back "U" trim	2.65
D-6039	Model "SS" back glass stop trim	2.65
B-6046	Model "SS" right hand insert lock lever	.80
B-6047	Model "SS" left hand insert lock lever	.80
A-6050	5¢ coin entrance plate	.50
A-6051	10¢ coin entrance plate	.50
A-6052	25¢ coin entrance plate	.50
D-6055	Model "SL" cabinet	82.00
D-6056	Model "SL" pedestal	3.00
D-6057	Model "SL" lightbox	28.00
D-6058	Front moulding wood filler	3.00
A-6087	Plastic slip in core 1-31/32" lg.	.20
A-6088	Coil	1.65
C-6089	Model "SL" right corner trim	5.00
C-6090	Model "SL" left corner trim	5.00
A-6091	Model "SL" flipper button bushing	.40
A-6092	Model "SL" flipper button	1.00
A-6095	Model "SL" push button switch link assembly – right	.50
A-6096	Model "SL" push button switch link assembly – left	$ .50
A-6098	Model "SL" ball plunger shaft and knob	2.22
A-6099	Model "SL" moulding lock adjustment nut	.60
A-6102	Model "SL" moulding lock plate	.50
C-6104	Model "SL" front moulding lock assembly	4.00
D-6105	Model "SL" front moulding hanger channel	.70
D-6106	Model "SL" front stainless moulding	7.00
D-6107	Model "SL" right side stainless moulding	12.50
D-6108	Model "SL" left side stainless moulding	12.50
D-6111	Model "SL" lightbox door	7.00
A-6112	Moulding lever door stop	.30
A-6113	Formed plastic shield 6-7/8" centers	.40
A-6115	Formed plastic shield 6-3/4" centers	.40
A-6116	Plastic shield	2.00
A-6117	Plastic shield	2.50
A-6118	Plastic shield	1.40
A-6119	Metal shield	.50
A-6120	Metal shield	.50
A-6121	Guide bracket – counter clockwise roto unit	.70
A-6122	Stop pawl lift – counter clockwise roto unit	.20
A-6125	Drive lever – counter clockwise roto unit	2.00
A-6126	15 tooth ratchet and shaft counter – clockwise roto unit	2.35
B-6127	Frame – counter clockwise roto unit	5.50
C-6130	Wiper and target assembly	17.50
D-6132	Score card holder with shooter cutouts	6.00
B-6133	Wiper	2.85
B-6134	Disc	3.50
C-6135	Disc	8.65
C-6136	Disc	8.65
C-6142	Ball trough complete w/ball stop assembly and switches	14.50
A-6157	Metal shield 3-7/8" centers	.35
B-6178	Model "SL" ball plunger assembly	4.75
B-6183	Transformer	22.00
D-6188	Score card holder 120° (small cabinet)	7.00
D-6189	Score card holder 120° (large cabinet)	6.50
D-6190	Score card holder 120°	6.50
A-6191	Plastic shield	1.30
B-6193	Disc	2.75
C-6194	Wiper	4.30
C-6195	Disc	6.25
A-6199	Plastic shield	3.00
B-6200	Plastic shield	2.90
C-6212	Wiper and targets	17.50
C-6214	Disc	8.00
B-6215	Transformer	22.00
A-6227	"800" score to beat plastic card	.50
A-6229	Disc	1.40
A-6237	Wiper backing plate	.40
A-6280	20 frs. coin entrance plate	.50
A-6281	50 frs. coin entrance plate	.50
A-6282	3d. coin entrance plate	.50
A-6285	10 pfg. coin entrance plate	.50
A-6286	20 ct. coin entrance plate	.50
A-6287	50 ct. coin entrance plate	.50
A-6288	25 ore coin entrance plate	.50
A-6289	50 ore coin entrance plate	.50
A-6290	1 kr. coin entrance plate	.50
B-6291	Disc	2.00

GOTTLIEB®

PRICE LIST

Arranged in Numerical Order

A-6322	Metal shield	$ .80
A-6323	Metal shield 6-7/8" centers	.65
A-6324	Card target "6"	.55
A-6325	Card target "7"	.55
A-6327	Card target "9"	.55
A-6328	Card target "Bullseye"	.55
A-6329	Plastic shield	2.80
A-6330	Wiper and targets	17.50
A-6331	Wiper	3.95
A-6332	Disc	5.75
C-6333	Disc	8.50
A-6334	1 fr. coin entrance plate	.50
A-6335	Flipper link 4-1/4" centers	.50
A-6337	6d. coin entrance plate	.50
A-6338	Metal shield 5-3/4" centers	.60
A-6339	Plastic shield	1.75
A-6340	Plastic shield	1.50
A-6341	Metal shield 2-3/4" centers	.35
A-6342	Metal shield 3" centers	.35
B-6343	Plastic shield	2.00
B-6348	Wiper	2.45
B-6349	Disc	2.50
C-6350	Wiper	4.70
C-6351	Disc	6.50
A-6359	Ball hole kicker – formed	1.10
A-6361	Ball hole kicker – formed	1.10
A-6413	Bayonet socket – single lug	.20
A-6414	Bayonet socket – double lug	.25
A-6416	Gear and shaft assembly	1.70
B-6419	Transformer	22.00
A-6424	"Hula Girl" design bumper cap	.25
A-6425	Plastic shield	1.90
A-6426	Plastic shield	2.00
A-6427	Plastic shield	2.00
A-6428	Plastic shield	2.40
A-6430	Metal shield 4-3/8" centers	.45
A-6433	"10 points" bumper cap	.25
A-6435	Plastic target "O" design	.16
A-6436	Plastic target "X" design	.16
A-6442	Drive lever assembly	1.85
A-6443	Nylon thrust washer	.02
B-6444	Transformer	22.00
B-6445	Transformer	22.00
A-6446	Plastic shield	2.00
A-6464	Plastic shield	2.50
A-6465	Metal shield 4-3/16" centers	.40
B-6471	Plastic shield	2.90
B-6472	Frame – small step switch	5.50
B-6473	Frame – small step switch	5.75
C-6475	Plastic revolving number shield	3.00
B-6476	Wiper	1.90
B-6477	Disc	2.75
B-6498	Wiper mounting spider	.25
A-6500	Metal shield 6" centers	.60
C-6501	Wiper	3.80
C-6502	Disc	5.00
A-6503	Gear and shaft assembly	1.90
A-6504	Drive lever assembly	2.20
B-6506	Wiper arm – 5 row span – 20 holes	.50
A-6507	Wiper arm – 5 row span – 10 holes	.40
A-6508	Metal shield 2-1/8" centers	.25
C-6510	Wiper	5.20
A-6513	Allen head "T" wrench	$ 1.50
C-6514	Disc	6.00
A-6544	Gear and shaft assembly	1.50
A-6545	Gear and shaft assembly	2.35
A-6546	Gear and shaft assembly	1.70
A-6547	Gear and shaft assembly	1.70
A-6548	Coin entrance plate – 25 ore	.50
A-6550	Wiper cover plate	.40
A-6558	Reset arm 5 position bank – without stop	.60
A-6559	Reset arm 6 position bank – without stop	.75
A-6560	Reset arm 7 position bank – without stop	.90
A-6561	Reset arm 8 position bank – without stop	1.05
A-6562	Reset arm 9 position bank – without stop	1.20
A-6563	Reset arm 10 position bank – without stop	1.35
A-6564	Reset arm 11 position bank – without stop	1.40
A-6565	Reset arm 5 position bank – with stop	.80
A-6566	Reset arm 6 position bank – with stop	1.00
A-6567	Reset arm 7 position bank – with stop	1.20
A-6568	Reset arm 8 position bank – with stop	1.40
A-6569	Reset arm 9 position bank – with stop	1.60
A-6570	Reset arm 10 position bank – with stop	1.80
A-6571	Reset arm 11 position bank – with stop	2.00
A-6572	Wedge lampholder	.20
A-6573	Plastic revolving number shield mounting plate	.90
A-6574	Gear and shaft assembly	2.35
A-6575	Plastic shield	2.50
A-6576	Plastic shield	3.00
A-6577	Plastic shield	2.90
A-6578	Flat metal rail	.30
A-6580	Target assembly – 100 points	2.75
A-6581	Juggling unit coil assembly	4.00
A-6582	Juggling unit coil assembly	4.00
D-6586	Formed plastic juggling unit ball race	10.00
B-6587	Disc	3.25
B-6588	Disc	3.00
C-6603	Wiper	5.55
C-6607	Metal shield	1.20
C-6608	Metal shield	1.20
A-6609	Plastic shield	1.20
A-6610	Plastic shield	1.50
A-6611	Metal shield	1.10
A-6615	Metal light shade	.60
A-6616	Light shade bracket	1.20
B-6617	Roto unit metal shield	.80
B-6621	Reverse unit spinner frame	5.50
C-6623	Wiper and target	17.50
C-6624	Wiper	4.70
C-6625	Disc	8.60
C-6626	Wiper	3.95
C-6627	Disc	6.00
C-6629	Disc	9.15
C-6630	Disc	9.15
B-6667	Wiper arm – 3 row span – 12 holes	.40
A-6668	Wiper arm – 3 row span – 6 holes	.40
B-6669	Wiper	2.35
B-6670	Wiper	2.25
B-6671	Disc	3.00
B-6673	Wiper	2.50
B-6674	Wiper	3.00
B-6675	Disc	4.75
B-6681	Disc	5.25

©TILT

PRICE LIST

Arranged in Numerical Order

A-6682	Plastic shield	$ 1.50
A-6683	Plastic shield	2.50
C-6688	Wiper	4.55
C-6689	Disc	6.50
A-6690	Flipper link and plunger 4-1/2" centers	1.20
A-6691	Flipper link, arm and plunger 4-1/2" centers	1.80
A-6694	Split target assembly	2.75
A-6695	Gear and shaft assembly	1.70
A-6698	Coil	1.65
A-6699	Motor 26 R.P.M.	10.00
A-6764	Coin entrance plate – 50 lire	.50
A-6765	Coin entrance plate – 100 lire	.50
B-6780	Trough switch mounting bracket	.30
B-6781	Trough switch mounting bracket	.30
A-6784	Trough rollover wire assembly	.30
A-6785	Trough rollover wire assembly	.30
A-6789	Plastic shield	1.30
A-6790	Plastic shield	1.50
A-6800	Catapult – ring the gong unit	1.00
A-6803	"11" card target	.55
A-6804	"12" card target	.55
A-6805	"13" card target	.55
A-6806	"14" card target	.55
A-6807	"Clown" target	.55
C-6808	Metal shield	1.20
C-6809	Wiper and target	17.50
B-6814	Wiper	2.60
B-6815	Wiper	2.60
C-6816	Disc	5.60
C-6817	Disc	5.50
C-6818	Disc	9.15
B-6820	Transformer	22.00
A-6821	Coil	.90
A-6822	Contact pin-relay bank	.03
A-6823	Metal shield with apron 1-7/8" centers	.30
A-6824	Plastic shield	1.45
A-6825	Coin entrance plate – 50 pfenning	.50
A-6826	Plastic shield	1.35
A-6827	Plastic shield	1.25
A-6828	"Torch" design bumper cap	.30
A-6829	Plastic target "star" design	.16
A-6831	Contact kicker	1.10
A-6832	Contact kicker	1.10
B-6836	Wiper	2.45
B-6837	Disc	4.60
C-6838	Wiper	4.70
C-6839	Disc	5.50
B-6847	Transformer	28.00
A-6882	Plastic shield	1.25
A-6883	Metal shield – 2" centers	.30
B-6885	Plastic shield	5.60
A-6888	Flipper shaft and shoe assembly	.50
B-6889	Wiper	4.70
B-6890	Disc	3.90
A-6892	Target assembly – red, white and blue target	2.75
A-6916	Bayonet socket	.70
A-6919	Plastic shield	1.30
A-6920	Plastic shield	1.30
A-6921	Metal shield 5" to 5-1/2" centers	.60
B-6938	Wiper	1.25
B-6939	Disc	$ 5.00
A-6940	#12 bakelite washer	.03
A-6941	Unit mounting bracket	.30
A-6942	Unit mounting bracket	.30
A-6943	Unit mounting bracket	.30
A-6944	Unit mounting bracket	.30
A-6945	Unit mounting bracket	.35
A-6947	Hairpin fastener	.04
A-6957	Gear and shaft assembly	1.70
A-6961	"15" card target	.55
A-6977	Spring	.10
B-6980	Plastic shield	1.90
A-6986	Swinging target wire form	.20
A-6990	Swinging target – saxophone	1.00
A-6991	Swinging target – trumpet	1.00
A-6992	Swinging target – drum	1.00
B-6994	Frame – small step switch	5.50
B-6995	Frame – small step switch	5.50
A-6997	Motor cam assembly	4.20
A-6999	Plastic shield	1.70
A-7000	Plastic shield	2.20
A-7001	Plastic shield	1.90
A-7002	"100 points when lit" bumper cap	.40
A-7003	Spring	.12
A-7013	Cowboy unit target and shaft	1.00
A-7018	Cowboy unit rachet assembly	.80
C-7024	Wiper and target	17.50
C-7026	Disc	9.15
A-7027	Target assembly – sunburst	2.75
A-7028	"50" points, spin" bumper cap	.30
A-7031	Motor cam assembly	3.95
A-7032	3/64" I.D. x 1/4" O.D. nylon washer	.03
A-7033	lite shade (specify red, green, or yellow)	.03
B-7034	Disc	4.50
A-7037	Playboard auto clamp spring	.25
A-7038	Playboard auto clamp spring	.12
B-7039	Auto clamp left strike bracket	.40
B-7040	Auto clamp right strike bracket	.40
B-7041	Auto clamp lock cam	.80
B-7043	Auto clamp lock handle	1.00
A-7046	Auto clamp lock lever	.50
B-7047	Auto clamp left pivot plate	1.30
B-7048	Auto clamp right pivot plate	1.30
A-7049	Cash box lock eye	.30
A-7083	Target assembly – red, white bullseye	2.75
A-7085	Target assembly – black, white bullseye	2.75
A-7087	Target assembly – red, yellow bullseye	2.75
C-7089	Metal shield	1.20
C-7090	Wiper and targets	17.50
B-7092	Wiper	2.50
B-7093	Wiper	2.20
B-7094	Disc	2.00
C-7096	Disc	9.15
C-7097	Disc	7.75
A-7107	Target assembly – red, white and blue target	2.75
A-7112	Coil	1.65
A-7117	Card holder	.50
A-7171	Plastic shield	1.50
A-7172	Plastic shield	1.80
A-7173	Metal shield with apron – 2-7/8" centers	.35
A-7174	Metal shield with apron – 3-1/8" centers	.40

GOTTLIEB®

PRICE LIST

Arranged in Numerical Order


B-7179	Wiper	$ 3.00
B-7180	Disc	5.50
A-7181	Front door hinge nut strip	.40
A-7185	Front door lock strike plate	.30
A-7186	Front door lock bolt	.40
A-7187	Front door lock bolt guide	.35
A-7188	Front door lock cam for ace type lock	.60
B-7189	Front door lock cam	.60
B-7192	Front door coin guide trough	2.90
B-7193	Front door coin return housing	1.50
B-7194	Front door coin return cover	1.00
B-7196	Front door hinge	1.20
C-7198	Auto clamp playboard support	1.65
C-7200	Coin entrance plate 5¢	2.00
C-7202	Coin entrance plate 10¢	2.00
C-7204	Coin entrance plate 5¢ & 25¢	2.00
C-7206	Coin entrance plate 10¢ & 25¢	2.00
D-7211	Front door – double chute	13.00
A-7214	Cash box divider for D-7216 cash box	.40
C-7215	Cash box cover for D-7216 cash box	1.50
D-7216	Cash box	3.50
A-7279	Metal shield with apron 1-11/16" centers	.30
A-7280	Plastic shield	1.60
A-7283	Contact kicker	1.10
A-7284	Contact kicker	1.10
A-7291	Wiper finger .045 THK.	.07
A-7292	Wiper finger bushing for A-7291	.08
A-7301	Shield – 2-7/16" centers	.30
A-7304	"Bullseye" red & white card target	.55
B-7305	6 hole actuating arm (bank flap)	.56
A-7307	trough rollover wire assembly	.30
A-7318	Gear and shaft assembly	1.70
A-7319	Plastic shield	1.40
A-7320	Plastic shield	1.75
A-7395	Gear and shaft assembly	1.70
C-7401	Coin entrance plate – 1 franc	2.00
C-7402	Coin entrance plate – 20 franc	2.00
C-7403	Coin entrance plate – 10 pfennig	2.00
C-7404	Coin entrance plate – 50 centimes	2.00
C-7405	Coin entrance plate – 25 ore & 1 krone	2.00
C-7406	Coin entrance plate – 50 ore & 1 krone	2.00
A-7407	SS3 lockdown moulding adjustment locknut	.16
A-7408	SS3 lockdown moulding adjustment screw	.20
C-7438	Coin entrance plate – 10 pfenning & 50 pfenning	2.00
A-7439	Coin entrance plate – 2 x 10 pfenning	.50
C-7440	Coin entrance plate – 2 x 10 pfenning & 50 pfenning	2.00
A-7442	Lightbox light divider	.10
A-7444	SS3 lockdown moulding lever	.80
D-7445	SS3 lockdown moulding slide	7.50
D-7446	SS3 lockdown moulding	10.50
B-7447	SS3 coin feed trough	$ 1.00
B-7448	SS3 coin feed trough cover	.90
A-7450	Grey rubber plug bumper	.08
A-7455	Plastic shield	1.20
A-7456	Plastic shield	2.00
A-7457	Metal shield 9" centers	.75
C-7460	Wiper	4.55
C-7461	Disc	6.25
C-7462	Disc	2.00
A-7465	Metal shield – 1-3/4" centers	.25
A-7467	Gear and shaft	1.70
A-7478	Front door hole plug	.30
A-7495	Front door coin return baffle plate	.20
A-7499	Metal shield	.40
A-7513	Plastic shield	1.30
A-7514	Plastic shield	1.50
B-7517	Wiper	3.00
B-7518	Disc	4.25
C-7529	Coin entrance plate – 3 pence	2.00
C-7530	Coin entrance plate – 6 pence	2.00
C-7532	Coin entrance plate – diana (0.10)	2.00
C-7533	Coin entrance plate – 25 ore	2.00
C-7534	Coin entrance plate – 1 drachma	2.00
C-7536	Coin entrance plate – 50 lire	2.00
C-7538	Coin entrance plate – 50 lire & 100 lire	2.00
C-7539	Coin entrance plate – 20 centimes	2.00
C-7540	Coin entrance plate – 25 ore	2.00
C-7541	Coin entrance plate – 50 ore	2.00
C-7543	Coin entrance plate – 25 ore & 1 krone	2.00
C-7544	Coin entrance plate – 25 centimos	2.00
C-7545	Coin entrance plate – 25 centimos & 1 bolivar	2.00
C-7547	Coin entrance plate – 10 yen & 50 yen	2.00
A-7552	Chime tone bar	P.O.A.
C-7558	Chime assembly	P.O.A.
C-7560	Coin entrance plate – 2 x 1 franc	2.00
A-7561	Plastic shield	1.35
A-7562	Plastic shield	1.25
A-7563	Plastic shield	1.50
A-7564	Plastic shield	1.90
A-7565	Metal shield	.60
C-7566	Disc	8.50
A-7568	Metal shield	.60
C-7574	Coin entrance plate – 20 centimes & 50 centimes	2.00
C-7575	Coin entrance plate – 50 centimes & 1 franc	2.00
A-7584	Front door lock cam for duo type lock	1.00
B-7587	Coin feed trough cover – 25¢ chute SL2	1.10
B-7588	Coin feed trough cover – 25¢ chute SS3	1.10
C-7589	Playboard auto clamp assembly – left	6.50
C-7590	Playboard auto clamp assembly – right	6.50
A-7652	Chime plunger	

SELECTRONICS

GOTTLIEB®

COIN *ACCEPTORS*
REPLACEMENT PARTS LIST
SERIES - 50

D-52

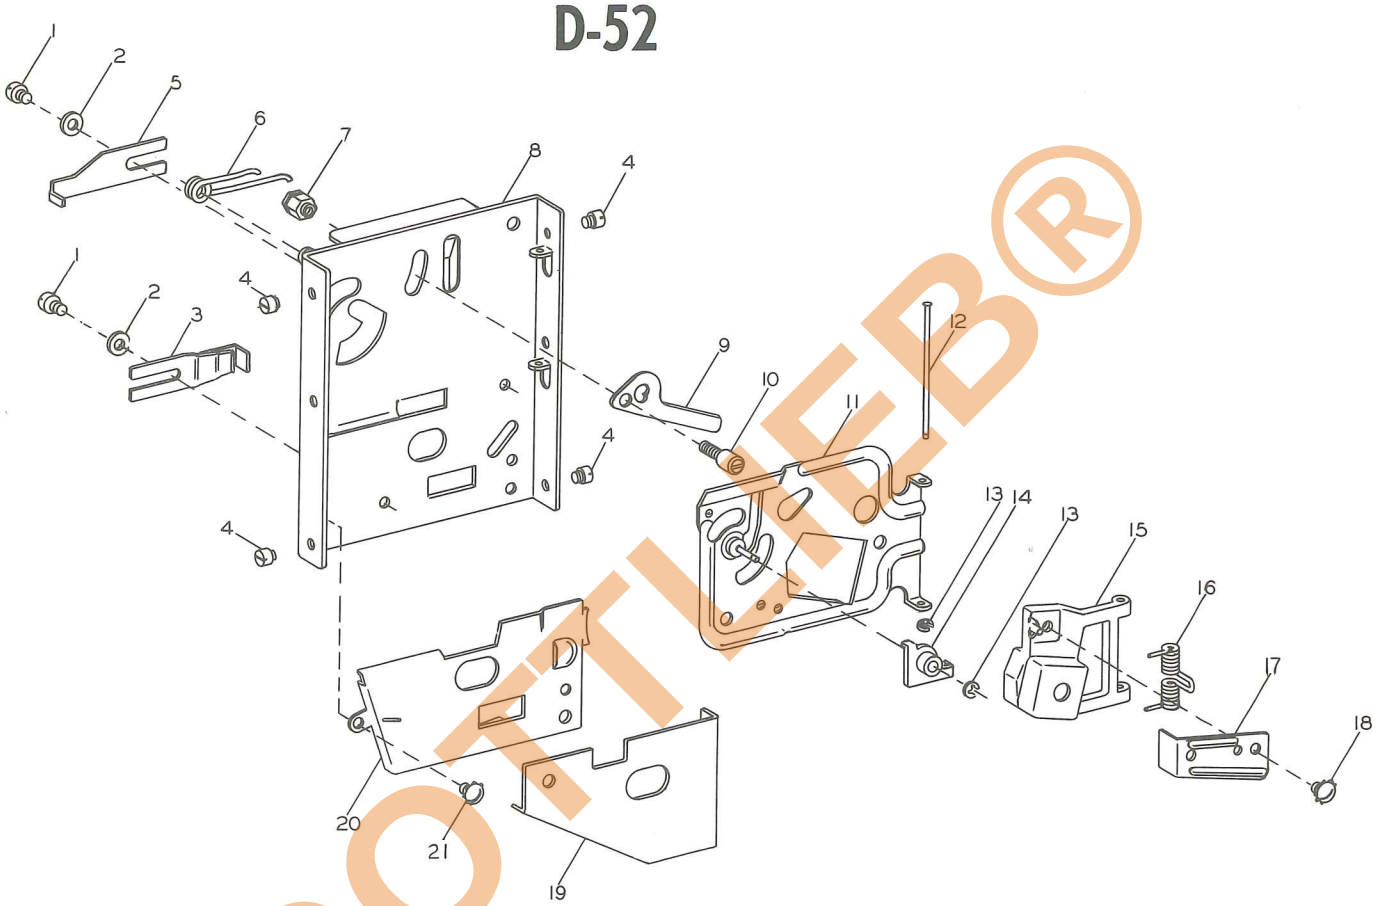

GOTTLIEB®


NOTE: When ordering parts be sure to specify the part number, description, quantity, and model number of unit.


INDEX NO.	PART NO.	DESCRIPTION	QUANTITY
1	50020	Kicker Screw	2
2	50030	Washer	2
3	5007	Separator Assembly	1
4	600818	Mounting Stud	4
5	600729	Kicker	1
6	50013	Gate Lever Spring	1
7	50014	Wiper Nut	1
8	5001	Main Channel Assembly	1
9	50007	Wiper	1
10	50011	Wiper Shoulder Screw	1
11	5002	Gate Assembly	1

INDEX NO.	PART NO.	DESCRIPTION	QUANTITY
12	50025	Gate Pivot Pin	1
13	600448	"C" Washer	2
14	5030	10c Transfer Cradle Assembly	1
15	50003	Magnet Gate	1
16	50027	Gate Spring	1
17	50009	Knockout	1
18	276-6-3	Screw-Thread-Cutting	1
19	50005	Return Coverplate	1
20	5005	Coverplate Assembly	1
21	150-6-2	Screw-Sems	1

COIN ACCEPTORS, INC.
1711 HEREFORD ST. • SAINT LOUIS 10, MO.

N-51

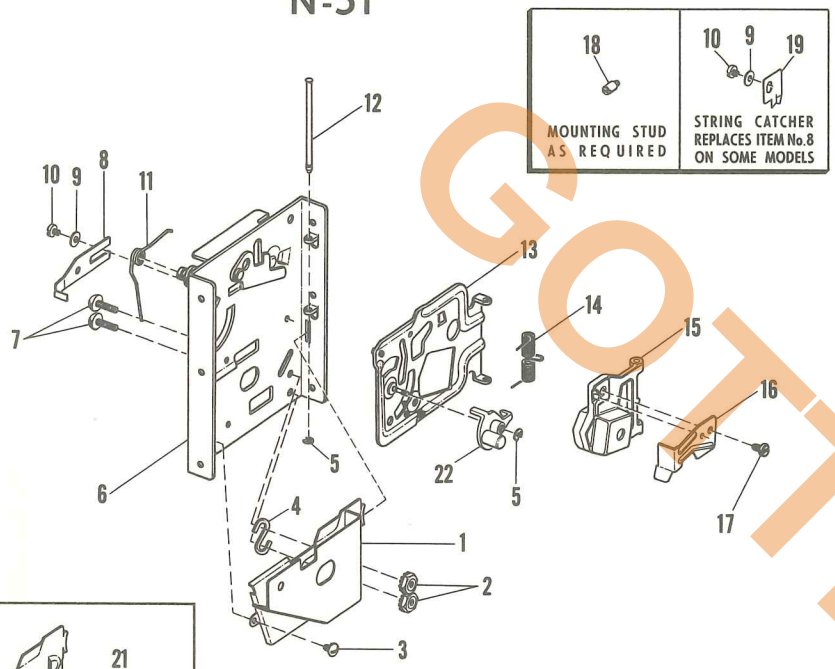





NOTE: When ordering parts be sure to specify the part number, descriotion, quantity, and model number of unit.

INDEX NO.	PART NO.	DESCRIPTION	QUANTITY
1	5023	5c Coverplate Assembly	1
2	438-8	Keps Nut	2
3	150-6-2	Screw-Sems	1
4	50049	Bounce Tester	1
5	600448	"C" Washer	2
6	5036	Main Channel Assembly	1
7	100-8-6	Screw	2
8	600729	Kicker	1
9	50030	Washer	1
10	50020	Kicker Screw	1
11	50069	Gate Lever Spring	1
12	50025	Gate Pivot Pin	1
13	5020	Gate Assembly	1
14	50027	Gate Spring	1
15	50048	Magnet Gate	1
16	50042	Knockout	1
17	276-6-3	Screw-Thread Cutting	1
18	600818	Mounting Stud	As Req.
19	50043	String Catcher	1
20	5022	5c Coverplate & Spacer Assembly	1
21	50005	Return Coverplate	1
22	5021	5c Transfer Cradle Assembly	1

Q-53

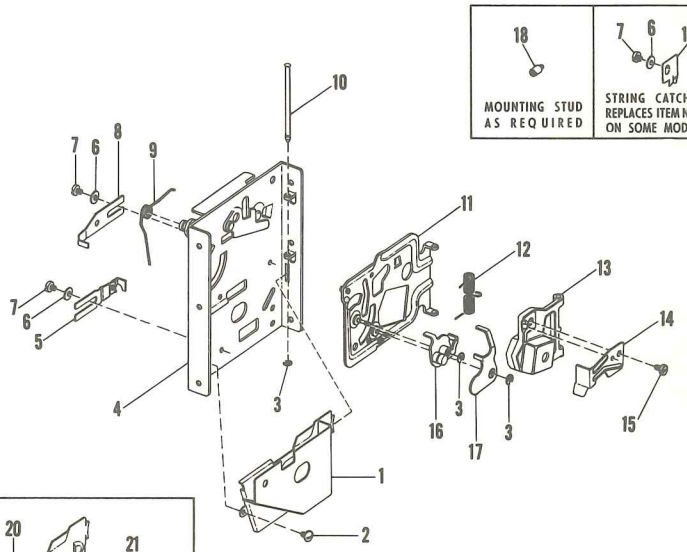



NOTE: When ordering parts be sure to specify the part number, description, quantity, and model number of unit.


INDEX NO.	PART NO.	DESCRIPTION	QUANTITY
1	5018	25c Return Coverplate Assembly	1
2	150-6-2	Screw-Sems	1
3	600448	"C" Washer	3
4	5036	Main Channel Assembly	1
5	5007	Separator Assembly	1
6	50030	Washer	2
7	50020	Kicker Screw	2
8	600729	Kicker	1
9	50069	Gate Lever Spring	1
10	50025	Gate Pivot Pin	1
11	5012	Gate Assembly	1
12	50027	Gate Spring	1
13	50003	Magnet Gate	1
14	50042	Knockout	1
15	276-6-3	Screw-Thread-Cutting	1
16	5014	25c Transfer Cradle Assembly	1
17	5015	25c Undersize Lever Assembly	1
18	600818	Mounting Stud	As Req.
19	50043	String Catcher	1
20	5017	25c Coverplate & Spacer Assembly	1
21	50005	Return Coverplate	1

GOTTLIEB®

SERIES 50
ACCEPTORS

GOTTLIEB®

- *Operation*
- *Adjustment*
- *Maintenance*

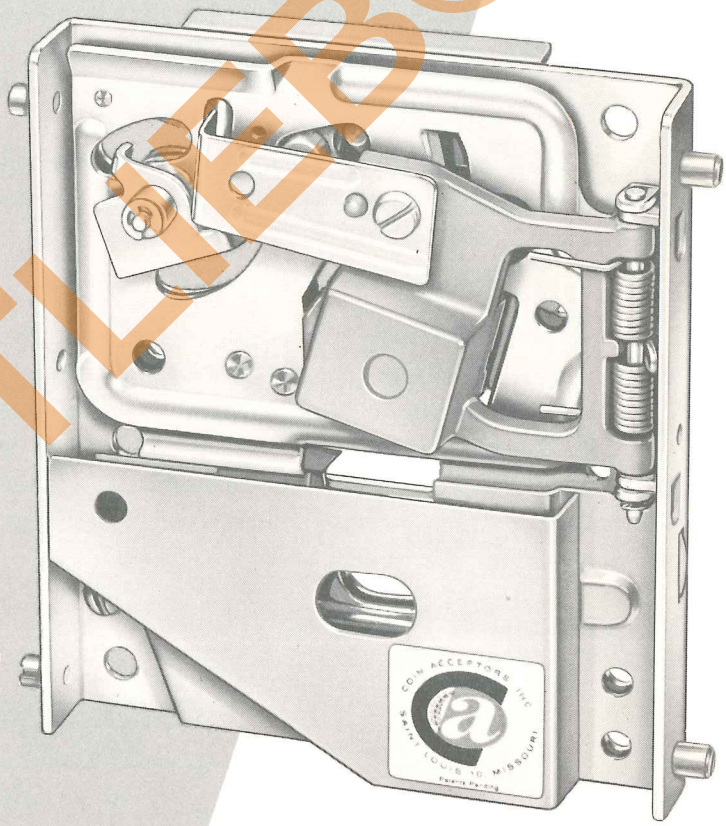

COIN
ACCEPTORS, INC.
1711 HEREFORD ST. • SAINT LOUIS 10, MO.


OPERATION –

The "Series 50" Acceptors are designed to require a minimum of maintenance and field adjustment. Detection and rejection of undesired or counterfeit coins are determined by size (both thickness and diameter), weight, metallic composition, and bounceability.

Transfer cradles are used to test the size of the coin. Undersize diameter coins will pass between the legs of the transfer cradle and will be returned. Oversize diameter coins will fail to pass between the transfer cradle and the wiper and will be returned by actuating the wiper operating lever. In the case of the quarter acceptor, an undersize lever must first be pivoted to unlock the transfer cradle. Undersize diameter "quarters" will fail to unlock the transfer cradle and will be returned by actuating the wiper operating lever. Coins that are oversize in thickness will fail to pass between the magnet gate and the main channel and will have to be dislodged and returned by actuating the wiper operating lever.

Transfer cradles are also used to test the weight of the coin. Underweight coins will fail to overcome the transfer cradle counterweight and will be returned by actuating the wiper operating lever.

A magnet is used to test the metallic composition of the coin. Highly magnetic coins, such as steel or iron, will be retained by the magnet and will be returned by actuating the wiper operating lever. Coins having comparatively high magnetic properties, such as copper, will be slowed down by the magnet and will drop off the end of the rail short of the "accept" entrance and be returned. Coins having little or no magnetic properties, such as brass or zinc, will pass through the magnetic field so fast that they will "overshoot" the "accept" entrance and be returned.

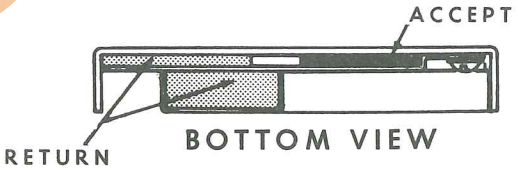

In the case of the Nickel Acceptor, a bounce tester is used to test the bounceability of the coin. Due to its magnetic properties, a genuine nickel passes quickly through the magnetic field and drops off the end of the rail in an arc that causes it to hit the bounce tester which, because of the coin's elasticity, "bounces" it into the "accept" entrance. A counterfeit coin passing through the magnetic field at the same speed as a genuine nickel will not have the same elasticity and so will not have the same "bounce" as a genuine nickel and will miss the "accept" entrance and be returned.


GOTTLIEB®

ADJUSTMENTS –

All "Series 50" Acceptors leave the factory adjusted for maximum performance. If, however, more critical adjustments are desired, or if the unit has been completely disassembled for service, the following adjustment procedure is suggested:

A. Kicker and Separator—(On Dime and Quarter Acceptors only)

1. Set the Acceptor with the back of the unit facing you in the test position.
2. Loosen the screws holding the kicker and separator and move both as far to the right as they will go. Tighten the screws.
3. Insert several coins (both old and new) and note that some are returned by striking the separator.
4. Loosen the separator screw and move the separator a slight amount to the left. Tighten the screw.

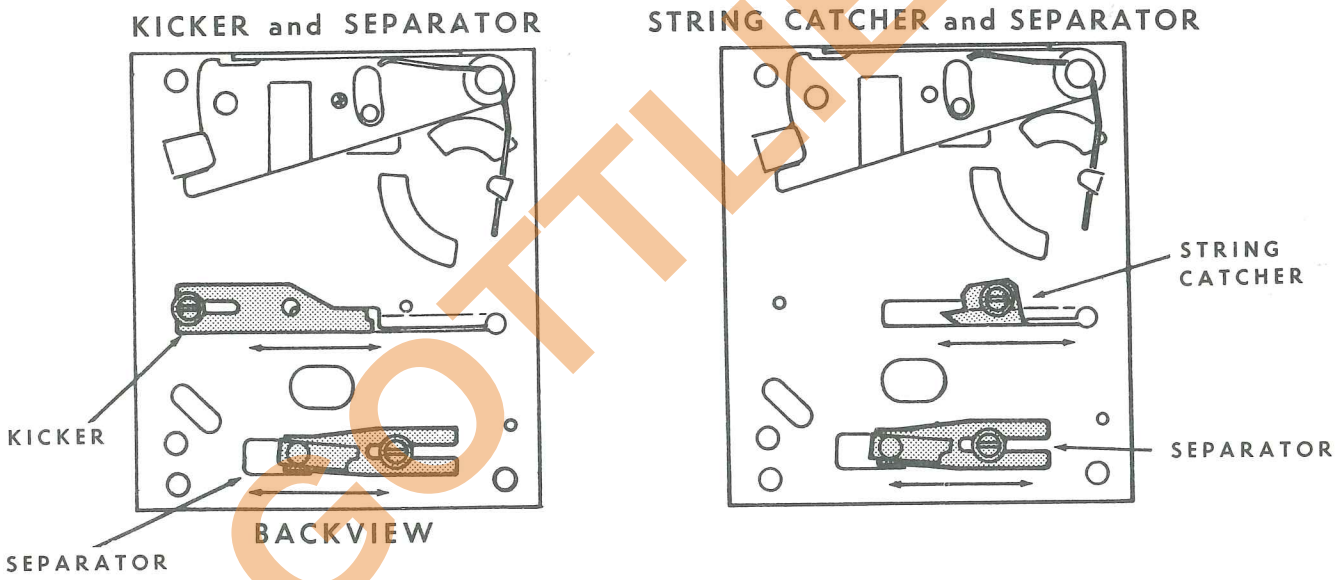

GOTTLIEB®

5. Insert the coins again and, if some of them are still returned, repeat Step 4 until all of the coins are accepted.
6. Loosen the kicker screw and move the kicker as far to the left as it will go. Tighten the screw.
7. Insert several coins and note that some of them are returned.
8. Loosen the kicker screw and move the kicker a slight amount to the right. Tighten the screw.
9. Insert the coins again and, if some of them are still returned, repeat Step 8 until all of the coins are accepted.
10. Be sure the screws are tight after all adjustments are made.

B. String Catcher—(Replaces the kicker in some models)

1. The "V" in the string catcher should be assembled even with the bottom of the kicker opening.
2. On Nickel and Quarter Acceptors, the string catcher is moved as far to the right as it will go.
3. On Dime Acceptors, the string catcher is moved as far to the left as it will go.

MAINTENANCE –

Depending upon the environment in which the Acceptor is used, periodic preventative maintenance should be performed.

The mainplate may be cleaned with any household cleanser. Thorough rinsing and drying are necessary to remove deposits and/or film.

Remove all filings from the magnet by guiding an ice pick, awl, or the point of a screw driver along the edges of the magnet. You will notice the filings will cling to the point of the tool.

Remove the transfer cradles and undersize levers and clean the bushings. A pipe cleaner makes a good bushing cleaner. Also clean the pivot pin. Apply powdered graphite or pencil lead sparingly to the pivot pin and bushing and reassemble.

On Nickel units make certain all foreign matter is removed from the bounce tester. Also make certain the bounce tester fastening screws are tight.

In the event the recommended adjustment and maintenance procedures do not render your "Series 50" Acceptor serviceable, check for worn or damaged parts and replace as necessary.

For service assistance or sales requirements, contact our branch office in your area.

GOTTLIEB®

PARTS AND SERVICES AVAILABLE IN THE FOLLOWING CITIES

ATLANTA
658 Eleventh St. N.W.
Atlanta, Georgia
875-8049

BOSTON
336 Summer St.
Sommerville, Mass.
666-3517

CHICAGO
8490 W. Grand Ave.
River Grove, Illinois
453-8221

CINCINNATI
6052 Tahiti Drive
Cincinnati 24, Ohio
542-0505

DALLAS AND FORT WORTH
603 Causley Ave.
Arlington, Texas
275-2164

HONOLULU
2850 Kaihikapu St.
Honolulu, Hawaii
58-7115

HOUSTON
2183 Portsmouth Ave.
Houston 6, Texas
526-4601

LOS ANGELES
3605 S. Broadway
Los Angeles 7, Calif.
232-0286

NEW YORK
23-10 44th Drive
Long Island City, N. Y.
361-1451

PHILADELPHIA
(Contact New York Branch)

PITTSBURGH
2442 East St.
Pittsburgh 14, Pa.
322-4111

SAN FRANCISCO
877 Cowan Road
Burlingame, Calif.
697-7416

ST. LOUIS
1711 Hereford St.
St. Louis 10, Mo.
664-5550

TORONTO
528 Rouge Hill, Dr.
West Rouge,
West Hill, Ontario
282-0597

8-63—7500

GOTTLIEB®